



Picture courtesy of TRANSAS MARINE

- 1024 x 768 Resolution
- 1500 or 3000 ANSI lumens
- Internal or External image warping

CompactView Clan XGA Models



X15-I	Internal warp/blend	1500 ANSI lumens
X30-I	Internal warp/blend	3000 ANSI lumens
X15-E	External warp/blend	1500 ANSI lumens
X30-E	External warp/blend	3000 ANSI lumens

CERTIFIED FOR 24/7 OPERATIONS



CompactView X15-I, X30-I, X15-E and X30-E Projectors


The CompactView X series projectors represent the latest projector technology for multi-image projection onto curved screens. These projectors combine the 3D Perception Digital Geometry Processor (patented) and Texas Instruments DLP™ technology into a fully digital, high performance and highly compact unit.

Unique Functions

- Non-linear Image Warping
- Multisided Soft Edge Blending
- Colour Control
- Gamma Correction
- CompactControl Interface
- Primary Colour Calibration

Typical Applications

- Any projection theatre, including curved screens.
- High resolution seamless Information Displays and Video Walls.
- Seamless Displays
- Immersive Virtual Reality Screens and Cubes

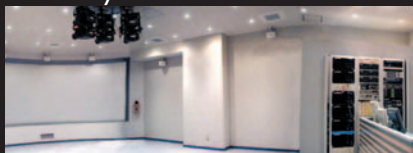

Virtual Reality Room



Car Simulator



Air Defence Simulator (Dome)



Ship Handling Simulator



Flight Simulator

Warping & Edge Blending Specifications

Warping

- ✓ Non-linear image mapping from 50% to 200 %
- ✓ Processing latency from 50 μ s to 12 ms dependent on mapping level
- ✓ Total latency typically 250 line period
- ✓ Automatic and manual options
- ✓ Up to 100 geometrical control points (compliant with curved screens requirements)
- ✓ Up to 5th order approximation between geometrical control points

Soft Edge Blending

- ✓ Multisided non-linear blending from 2% to 100% of total image
- ✓ Alpha adjustable from 0 to 4 across overlapped areas
- ✓ Gamma adjustable from 0.25 to 4 in overlapped areas
- ✓ Up to 5 geometrical control points (compliant with curved screens requirements)

Colour

- ✓ Individual RGB adjustments of $\pm 20\%$ in addition to native adjustment capabilities
- ✓ Primary Colour Calibration (For 'E' models with CompactUTM zer0 only)
- ✓ Input Offset and Input Gain adjustments

Gamma

- ✓ Individual RGB adjustments from 0.25 to 4 in addition to native adjustment capabilities

Projector Specifications

Resolution (native)	1024x768	Aspect ratio (native)	4:3
Technology	DDR - Double Data Rate DMD™ Module DLP™ by Texas Instruments	Contrast (black on/off)	>1600:1
Compatibility	For PCs, Macs, SGI and other workstations	Noise level	28 dB
Computer Interface	UXGA, SXGA+, SXGA, XGA, SVGA	Dimensions	278 x 244 x 88 mm
Video Interface	HDTV (1080i, 720p, 576i/p, 480i/p) Full NTSC, NTSC4.43, PAL, PAL-M, PAL-N, SECAM Faroudja™ de-interlacing with automatic film mode detection (3:2 and 2:2 pulldown)	Weight	3.9 kgs
Inputs	2 VGA 15 Pin DSUB (Analogue RGB) 1 DVI (Digital RGB) 1 Component video (SDTV/HDTV) 1 S-video 1 Composite video 4 Stereo Mini jack audio	Power	90-260 VAC, 50-60Hz, 350 W
		Standard wide angle lens	1:1.25
		Optional intermediate throw	1:2.2 - 2.8
		Conformance	UL, CE, FCC Class A

Information in this document is subject to change without notice.

Head office

3D PERCEPTION AS

P.O.Box 455
Solbråveien 41
N-1373 Asker
Norway

Tel: +47 66 98 70 70
Fax: +47 66 98 70 71
info@3d-perception.com

Regional offices

3D PERCEPTION Inc

13255 SW 137th Avenue
Suite #203
Miami
Florida 33186

Tel: +1 305 378 5593
Fax: +1 305 378 5582
paal.s@3d-perception.com

3D PERCEPTION AS

Mitsui Residence 102
4-2-2 Roppongi
Minatu-ku
Tokyo 109-0032

Tel: +81 3 3401 6771
Fax: +81 3 3401 6772
satoh@3d-perception.com



www.3d-perception.com