

# Acer P1100C

ACER P1100C



## Brief Introduction

Beta 2.5

A brief introduction to the Acer P1100C. The DLP projector has an SVGA 800 x 600 resolution and a contrast of 4000:1. The manufacturer Acer specifies a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours a day. The projector can illuminate a picture width of up to 444 cm thanks to its 2600 Ansi lumens. In room light, however, the picture width should ideally be less than 296 cm. It is also Full HD 1080P compatible. The operating noise of just 28 decibels makes the projection quiet. The model was built by Acer in 2010 and is no longer current.

## Display Type

1 x DLP Chip  
SVGA 4/3 Ti Digital Light Processing Chip

## Ansi-Lumen

2600 / 2080 im Eco Mode 841 Lux (bei 203 cm Screen)

## Contrast

4000:1 full on/off 4000:1 full on/off

## Black Level

0,6500 min. Lumen 0.21 min. Lumen

## Offset

SVGA 800 x 600

## Resolution

480.000 Pixel  
UXGA 1600 x 1200 compressed

## Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

## 3D Compatibility

Frame Sequential (3D Ready)

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.  
Medium screen width or rooms with little light, max. 100 lumens.

## Light Source

180W P-VIP Lamp

## Light Life

Articel Nr.: EC.K1500.001

4000 h. 5000 h. in Eco Mode

## Operating Costs

9,52% / 0,04 €

## Focus

Manual

## Zoom

Manual 1,1

## Objective

F=2,41-2,55 f=21,79-23,99 mm

## Throw Ratio


1,95-2,15:1


## Audio

1 x 2W

## Connections

2 x D-sub 15 pin in 1 x out  
S-Video in  
Cinch Video in  
USB Typ B  
RS232C  
Mini Jack Audio in und out

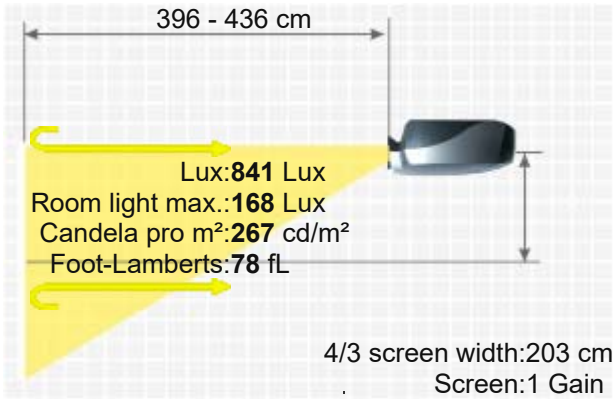



Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Yes  
235W  
269 x 84 x 206 mm (10,6"x3,3"x8,1") 4,65 L/dm³  
28 / 25 dB in Eco Mode

Weight  
Keystone  
Illumination

2,34 kg / 5,16 lbs.  
Vert.: +/-40°  
90%

Frequenz

H-sync: 30-100 kHz  
V-sync: 50-120 Hz

Foot-Lamberts


78 fL / max. 444 cm screen width  
267 cd/m²

- Features
- Full HD 1080P compatible
  - Freeze
  - Eco Mode
  - Kensington Slot
  - Gamma correction
  - Remote control with laser pointer
  -

Optional	Bulb only Osram	NLMP19676
	Lamp ruby	Ruby-LMP19676
	Lamp original	EC.K1500.001
	Compatible lamp	LMP-K19669
	Remote original	MC.JMV11.00G
	Remote control original	MC.JK211.007 / VZ.J5300.005 / VZ.J5600.002
	Ceiling Mount 100-120	Halterung100

Status  
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19669>  
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

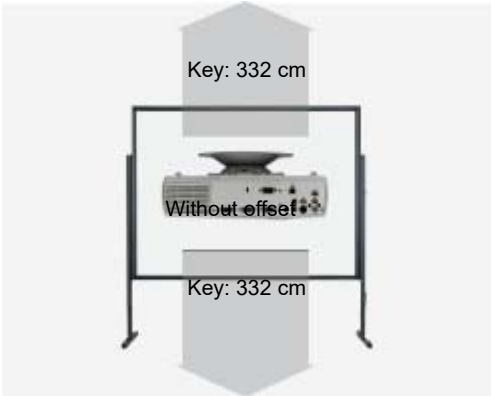

More Details



# HCinema

<https://www.projector-database.com/pro/acerp1100c-en.html>