

Acer P1163

ACER P1163



The Acer P1163 standard portable 3D BrilliantColor DLP projector has 3000 Ansi lumens, a contrast of 17000:1 and an SVGA 800 x 600 resolution. The lamp in the projector is specified with a lamp life of 4500 hours, which converts to over 6.2 years at 2 hours per day. A picture width of up to 477 cm is possible. However, the picture should be smaller in room light. We recommend max. 318 cm. The projector can also display 1080P and 3D without any problems. The model was built by Acer in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen Contrast Black Level Offset

3000 / 2400 im Eco Mode	971 Lux (bei 203 cm Screen)
17000:1 full on/off	17000:1 full on/off
0,1765 min. Lumen	0.057 min. Lumen

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

WUXGA 1920 x 1200 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190W UHP Lamp
Articel Nr.: MC.JGL11.001

Light Life

4500 h. 6000 h. in Eco Mode

Operating Costs

7,14% / 0,03 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,79-23,99 mm

Throw Ratio


1,95-2,15:1

Audio

1 x 2W

Connections

HDMI 1.4a in
D-sub 15 pin in und out
S-Video in
Cinch Video in
Mini Jack Audio in

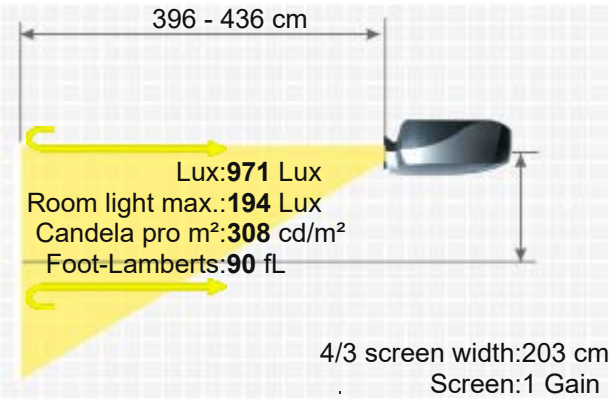



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
240W
268 x 80 x 192 mm (10,6"x3,1"x7,6") 4,12 L/dm³
31 / 26 dB in Eco Mode

Weight
Keystone
Illumination

2,20 kg / 4,85 lbs.
Vert.: +/-40°
85%

Frequenz

H-sync: 30-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts

90 fL / max. 477 cm screen width
308 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - BrilliantColor™
 - 6-segment colour wheel
 - 2x digital zoom


Optional

Remote control original VZ.JBU00.001, A-16041
Lamp original MC.JGL11.001

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro21918>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-03-01 16:21:48

Data

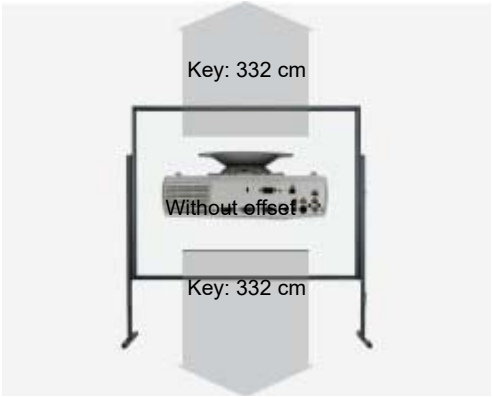

More Details



HCinema

<https://www.projector-database.com/pro/acerp1163-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.