

3M PD80X



3M PD80X



Brief Introduction
Beta 2.5

A brief introduction to the PD80X: The 3M stationary DLP projector offers 4000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. An image width of up to 551 cm is possible as the projector has 4000 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 367 cm is recommended. This model is no longer offered by 3M.

Display Type

 1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4000 Screen 1294 Lux (bei 203 cm Screen)

Contrast

Projector 1000:1 full on/off Screen 1000:1 full on/off

Black Level Offset

Projector 4,0000 min. Lumen Screen 1.298 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

250W Lamp

Light Life

-

Operating Costs

-

Focus

-

Zoom

-

Objective

-

Throw Ratio

-

Audio

-

Connections

HDMI in
DVI-I in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-video in
Cinch Video in
RJ45 in
USB in
RS232C

Ceiling Mounting

Yes

Power

650W

Size WxHxD

411,5 x 198,1 x 475 mm (16,2"x7,8"x18,7") 38,65 L/dm³

Operating Noise

36dB

Weight


15,51 kg / 34,19 lbs.

Keystone

-

Illumination

-

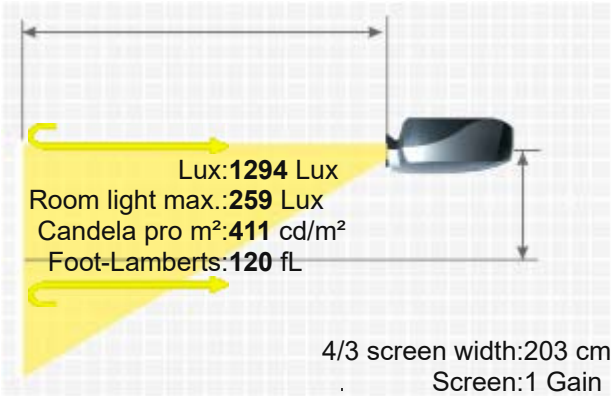

Frequenz	H-sync: 15-94 kHz V-sync: 50-85 Hz
Foot-Lamberts	120 fL / max. 551 cm screen width 411 cd/m²
Features	■ Lan network compatible. -
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/3mpd80x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.