

Acer P1201B

ACER P1201B



Brief Introduction

Beta 2.5

The Acer model P1201B is a DLP projector with XGA 1024 x 768 resolution and a contrast of 3700:1. The manufacturer specifies a lamp life of 5000 hours, which would be over 6.8 years with a daily viewing time of 2 hours. 2700 Ansi lumens ensure that a picture width of 453 cm is also possible. However, if room light is available, the picture should be max. 302 cm wide. It is also Full HD 1080P compatible. The operating noise of just 28 decibels makes the projection quiet. The model was built by Acer in 2012 and is no longer current.



1 x 0,55" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector

2700 / 2160 im Eco Mode
3700:1 full on/off
0,7297 min. Lumen

Screen

900 Lux (200 cm Screen width)
3700:1 full on/off
0,243 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

180W P-VIP Lamp

Article Nr.: EC.JC600.001

5000 h. 6000 h. in Eco Mode

-

Manual


Manual 1,1


F=2,41-2,55 f=21,79-23,99 mm

1,95-2,15:1

1 x 2W

HDMI in
D-sub 15 pin in und out
S-Video in
Cinch Video in
USB Typ A, B
RS232C
RJ45 in

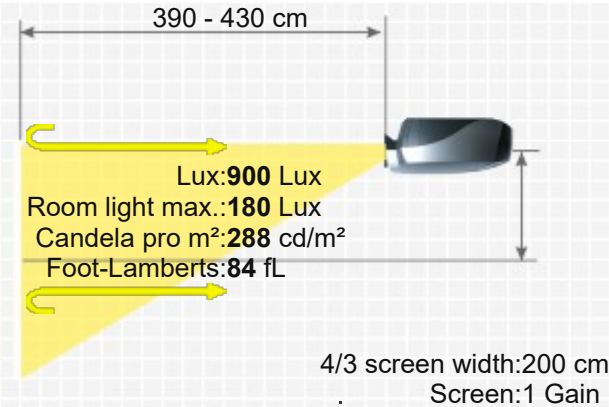



Ceiling Mounting	Yes, is possible.
Power	255W
Size WxHxD	269 x 84 x 206 mm (10,6"x3,3"x8,1") 4,65 L/dm³
Operating Noise	28 / 25 dB in Eco Mode


Weight	2,45 kg / 5,4 lbs.
Keystone	Vert.: +/-40°
Illumination	90%

Frequenz	H-sync: 30-100 kHz V-sync: 50-120 Hz
----------	---

Foot-Lamberts	84 fL / max. 453 cm screen width 288 cd/m²
---------------	---

Features	■ Full HD 1080P compatible ■ Eco Mode ■ Lan network compatible. ■ Crestron®-Software compatible.
----------	---

Screen Mirroring	-
------------------	---

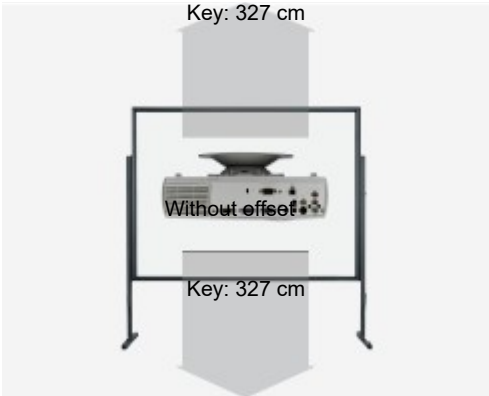

Optional accessories

	Nackte Osram Lampe	NLMP20317	50,94 €
	Lampe Original	EC.JC600.001	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status	2012 Discontinued (EOL) // Last update of the data: 2026-06-08
--------	--

Data	
------	--

More Details



HCinema

<https://www.projector-database.com/pro/acerp1201b-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.