

Acer X1170A

ACER X1170A



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

The Acer X1170A standard portable 3D DLP projector has 2700 Ansi lumens, a contrast of 10000:1 and an SVGA 800 x 600 resolution. The service life of the lamp is up to 5000 hours, which is the equivalent of over 6.8 years at 2 hours per day. 2700 Ansi lumens ensure that a picture width of 453 cm is also possible. However, if room light is available, the picture should be max. 302 cm wide. Even 1080P video signals are no problem for the projector. The operating noise of just 30 decibels makes the projection quiet. The model was built by Acer in 2012 and is no longer current.



1 x 0,55" DC3 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector

2700 / 2160 im Eco Mode
10000:1 full on/off
0,2700 min. Lumen

Screen

900 Lux (bei 200 cm Screen)
10000:1 full on/off
0,09 min. Lumen

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190W P-VIP Lamp

Articel Nr.: MC.40111.001

5000 h. 6000 h. in Eco Mode

-

Manual

Manual 1,1

F=2,57-2,65 f=21,00-23,10 mm

1,86-2,04:1

-

1 x D-sub 15 pin in 1 x out

S-Video in


Cinch Video in

RS232C Din 9 pin in

Mini jack Audio in und out

USB

Yes

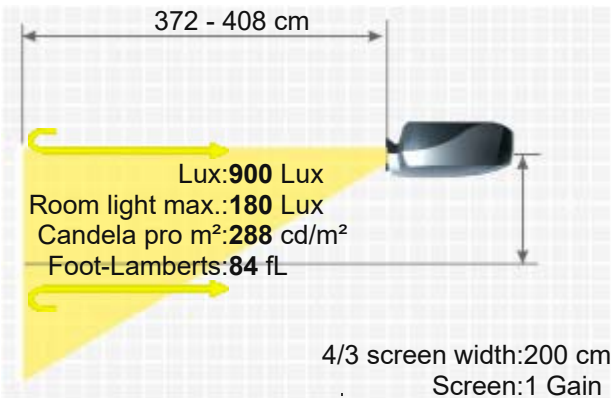

Power 240W
Size WxHxD 264 x 78 x 220 mm (10,4"x3,1"x8,7") 4,53 L/dm³
Operating Noise 30 / 26 dB in Eco Mode


Weight 2,00 kg / 4,41 lbs.
Keystone Vert.: +/-40°
Illumination 85%

Frequenz H-sync: 30-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

Features ■ Full HD 1080P compatible
■ Eco Mode
■ 2x digital zoom

Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2015-05-11 14:00:19

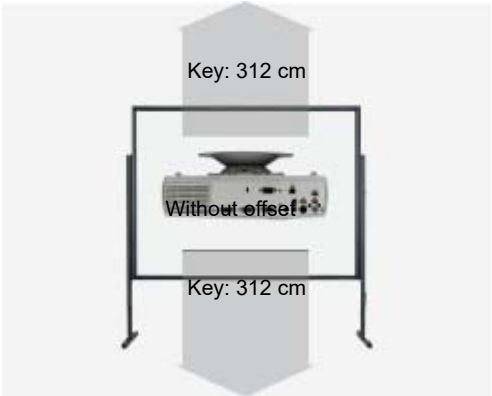

More Details

HCinema
<https://www.projector-database.com/pro/acerx1170a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.