

Acer XL2530

ACER XL2530



Brief Introduction
Beta 2.5

The standard portable Acer XL2530 laser DLP projector has 4800 Ansi lumens, a contrast of 50000:1 and an HDTV 1920 x 1080 resolution. The service life is 20000 hours due to the laser, which is over 13.7 years if enjoyed for four hours a day. The projector can illuminate images up to 704 cm wide thanks to its 4800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 469 cm is recommended. The model optionally recognizes screen mirroring signals, so it is possible to play videos with high resolution and surround sound directly via WLAN from a smartphone, tablet or PC (Android, Windows and iOS). The model is also Full HD 1080P and 4K (compressed) compatible and can therefore project Blu-rays even onto the ceiling using 360° projection. The projector is very quiet compared to others with 26 decibels of operating noise. The model was built by Acer in 2023 and is no longer current, but is still a popular projector in our database.

Display Type

1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen
Contrast
Black Level
Offset

Projector 4800
50000:1 full on/off
0,0960 min. Lumen
Screen 2133 Lux (bei 200 cm Screen)
50000:1 full on/off
0,043 min. Lumen

Resolution

HDTV 1920 x 1080
2.073.600 Pixel
UHD (4K2K) 3840 x 2160 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
Light Life

54W Laserdiode
20000 h. Normal / 30000 h. Eco

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual 2x Digital

Objective


F=2,50-2,67 f=21,86-24,00 mm

Throw Ratio

1,48-1,62:1

Audio

1 x 15W

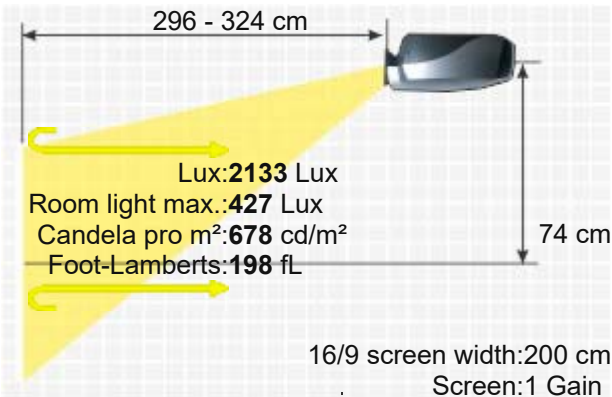

2x HDMI (1x1.4b, 1x 2.0) in
D-Sub 15 Pin in
Mini Jack Audio in und out
2x USB-A in
RS232C Din 9 pin in

Connections



Ceiling Mounting

Yes

Power

-

Size WxHxD

286 x 116 x 216 mm (11,3"x4,6"x8,5") 7,17 L/dm³

Operating Noise

26dB

Weight

2,90 kg / 4,41 lbs.

Keystone

Vert.: +/-40° automatisch

Illumination

-

Frequenz

-

Foot-Lamberts

198 fL / max. 704 cm screen width
678 cd/m²

■ Full HD 1080P compatible

■ User logo

■ Eco Mode

■ Automatic and manual vertical keystone correction

■ Kensington Slot

■ 360° installable

■ Password protection

■ Optional Wi-Fi network compatible.

Features

Status

2023 Discontinued (EOL) // Last update of the data: 2024-08-21

Data



More Details



HCinema

<https://www.projector-database.com/pro/acerx12530-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.