

Barco RLM G5i Performer

BARCO RLM G5i PERFORMER



Brief Introduction

Beta 2.5

Brief introduction to the Barco RLM G5i Performer. The stationary DLP projector has an XGA 1024 x 768 resolution and a contrast ratio of 1000:1. The projector also offers a lens shift function, which makes image setup childs play. An image width of up to 584 cm is possible; if the image width is smaller (we recommend max. 389 cm), rooms with residual light are also no problem. If the image is still too small, the projector offers integrated edge blending software, which allows multiple projectors to project a large image together. It was launched in 2004 and is no longer offered by the manufacturer Barco.

Display Type



3 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4500

Screen 1500 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

4,5000 min. Lumen

1,505 min. Lumen

Lens shift

Vert.: +50% -5% Hori.: +/-37,5%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

NTSC, PAL, SECAM HDTV

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 250W mercury Lamp

Light Life

Article Nr.: R9852940

1000 h.

Operating Costs

-

Focus

-

Zoom

-

Objective

optional

Throw Ratio


optional

Audio

-

Connections

1x configurable 5 cable (BNC)
1x composite Video (BNC)
1x S-Video (4-pin DIN)
1x analogue RGB (D15 Connector)
1x SDI (+ loop through)
1x DVI (Digital Visual Interface)
1 x RS-232 / 422 IN
1 x XLR female (2 way)

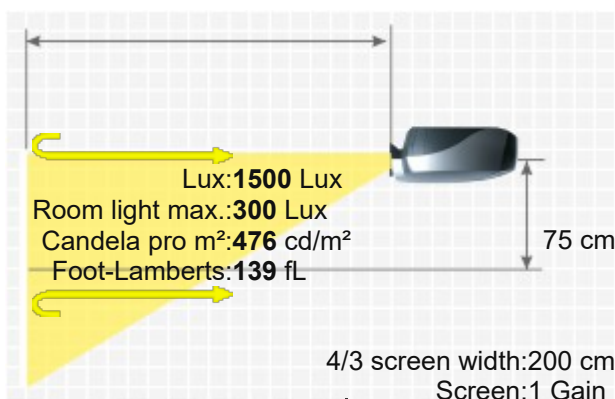

Ceiling Mounting
Power
Size WxHxD
Operating Noise

build-in RF remote transceiver (optional)
Yes, is possible.
700W
705 x 316,5 x 707,8 mm (27,8"x12,5"x27,9") 157,51 L/dm³
42dB

Weight
Keystone
Illumination

25,00 kg / 55,12 lbs.
-
90%

Frequenz

-

Foot-Lamberts


139 fL / max. 584 cm screen width
476 cd/m²

Features

- Lens shift Funktion
- Freeze
- Gamma correction
- Edge Blending
- Picture-in-Picture
- Password protection
-

Screen Mirroring

-

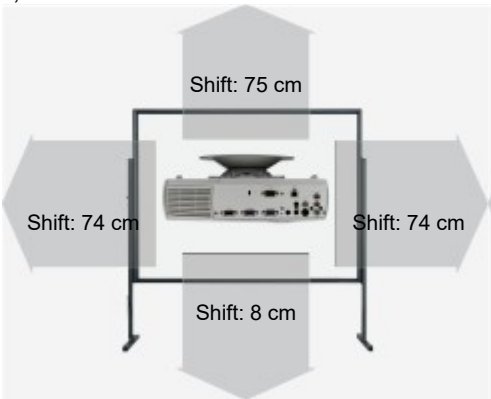

Optional accessories

	Doppel Lampe Original	R9852940	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Barco RLD (HB) 5.0-8.0	6.19-10.16:1	12.4-20.3 m	60-12.5%	+/-37.5%	
Barco RLD (HB) 5.0-8.0	3.46-6.26:1	6.9-12.5 m	60-12.5%	+/-37.5%	
Barco RLD (HB) 2.8-5.0	3.46-6.26:1	6.9-12.5 m	60-12.5%	+/-37.5%	Powered
Barco RLD (HB) 2.0-2.8	2.45-3.48:1	4.9-7 m	60-12.5%	+/-37.5%	Powered
Barco RLD (HB) 1.6-2.0	1.98-2.48:1	4-5 m	60-12.5%	+/-37.5%	Powered
Fix Optional Lenses					
Barco RLD (HB) 0.8	1.1:1	2.2 m	30-17.5%	+/-25%	No Zoom

Status 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data 

More Details



HCinema

<https://www.projector-database.com/pro/BarcoRLMG5iPerformer-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.