

ASK Proxima C250

ASK PROXIMA C250



Brief Introduction

Beta 2.5

The standard portable ASK Proxima C250 BrilliantColor DLP projector has 2500 Ansi lumens, a contrast of 1400:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes image adjustment childs play. A picture width of up to 435 cm is possible. However, the picture should be smaller in room light. We recommend max. 290 cm. The model was built by ASK Proxima in 2007 and is no longer current.

Display Type



1 x 0,7" DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2500 / 1800 im Eco Mode

833 Lux (bei 200 cm Screen)

Contrast

1400:1 full on/off

1400:1 full on/off

Black Level

Offset

1,7857 min. Lumen

0,596 min. Lumen

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

220 / 160W im Eco Mode Lamp

Light Life

Articel Nr.: SP-LAMP-026

2000 h. 3500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,3-2,7 f=23,6-28,25 mm

Throw Ratio

1,83-2,27:1

Audio

1 x 3W Mono

DVI M1DA

D-Sup 15 pin in und out

S-Video in

Cinch Video in

Connections


Mini jack Audio in und out

RS232C



Ceiling Mounting

Yes

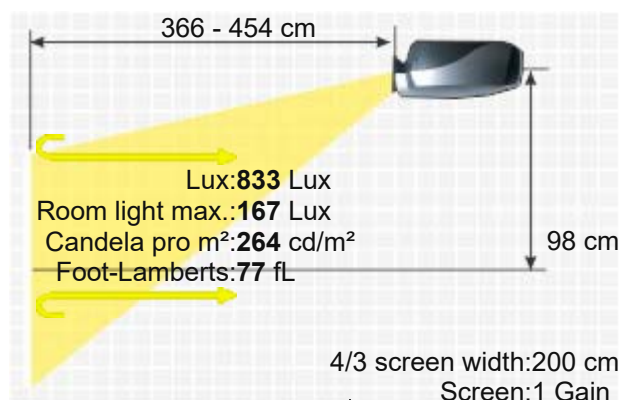

Power 272 / 205W in Eco Mode
Size WxHxD 263,1 x 74,4 x 132,3 mm (10,4"x2,9"x5,2") 2,57 L/dm³
Operating Noise 35 / 32 dB in Eco Mode

Weight 2,27 kg / 5 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°

Illumination -

Frequenz H-sync: 15,6-85 kHz
V-sync: 48-85 Hz


Foot-Lamberts 77 fL / max. 435 cm screen width
264 cd/m²

- Features
- Blank (Black screen button)
 - Eco Mode
 - BrilliantColor™
 - Overscan adjustable
 - 6-segment colour wheel.

Lamp ruby	Ruby-LMP16364
Lamp original	SP-LAMP-026
Optional Compatible lamp	LMP-K16364
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d18097>
2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

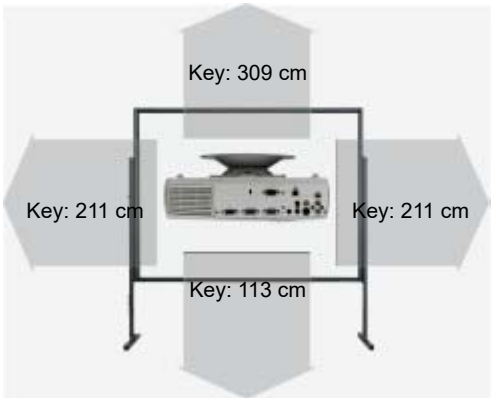

More Details



HCinema

<https://www.projector-database.com/pro/askproximac250-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.