

ULTIMATE VERSATILITY

INCREDIBLE BRIGHTNESS

SUPERB IMAGE DEFINITION

B O X L I G H T

MP-38t

Whether they're in the front of the room or the back you want everyone in your audience to have the best view.

BOXLIGHT'S MP-38t offers all the right numbers to make it happen: 2500 ANSI lumens, 700:1 contrast ratio and 1024 x 768 XGA resolution. The **MP-38t** is perfect for medium to large conference venues and produces incredible, **HIGH QUALITY IMAGES EVERY TIME**. Every BOXLIGHT projector features the latest technology, **HIGH PERFORMANCE** design and all include **24/7 TECHNICAL SUPPORT** so your satisfaction is assured. Call us today for all your presenting needs.

19332 Powder Hill Place
Poulsbo, Washington 98370
800.762.5757
360.779.7901
www.boxlight.com




Boxlight and the Boxlight logo are registered trademarks of Boxlight Corporation. © Copyright Boxlight Corporation, 2000. All other marks are the property of their respective owners. Specifications subject to change without notice. M1-MP-38tUS-03/01

B O X L I G H T

MP-38t

p r o j e c t o r

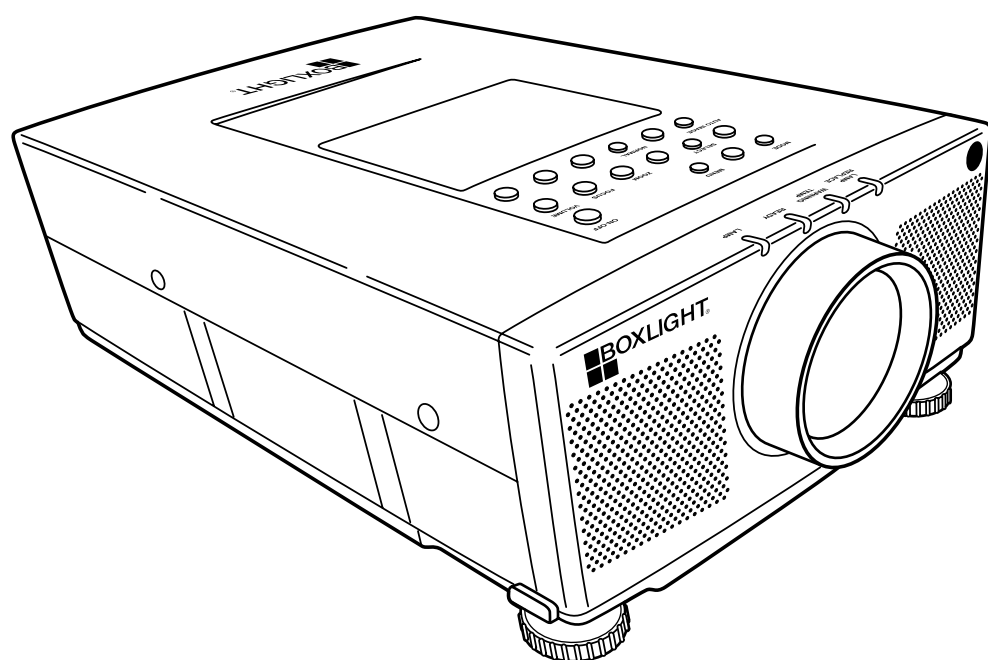

- True XGA resolution with compression for SXGA. Even the smallest details are crisp and clear.
- Packed with 2500 ANSI lumens to brighten up any room. Eighty-five percent brightness uniformity is one of the best in the industry.
- 700:1 contrast ratio creates incredible image definition.
- Digital Progressive Scanning doubles the video information that is sent to the projector for crisp, clear video images every time.
- HDTV compatibility, multiple inputs and outputs, and optional zoom lenses combine to make the MP-38t suitable for unlimited applications.
- All BOXLIGHT projectors feature the latest in technology and design. Free, lifetime 24/7 technical support and the fastest turn around in the industry from our state-of-the-art service center are included for your convenience.

BOXLIGHT®
Presenting a Better Way

To contact BOXLIGHT

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free Fax	888.353.4242
Internet	www.boxlight.com

Resolution	1024x768 XGA and compressed 1280 x 1024 SXGA	Dimensions	10.7"/27.2 cm (W) x 5.7"/14.5 cm (H) x 16.3"/41.3 cm (D)
Brightness	2500 ANSI lumens	Projection Lens	Motorized F1.8-2.1; zoom ratio 1:1.3
Lamp	200W UHP	Diagonal Image Size	30-400"/1.76-10.16 m
Display Type	Three 1.3"/3.3 cm TFT polysilicon LCDs with Micro Lens	Throw Distance	4.6-47'/1.4-14.4 m
Contrast Ratio	700:1	Keystone	Digital +/- 40°
Colors	16.7 million	Adjustments	On-board and a remote
Aspect Ratio	4:3, 16:9 compatible	Power Supply	100V-240V; 50/60Hz
Inputs	Computer: (2) 15 pin; Video: (1) RCA, (1) SVHS, (1) component; Audio: (1) RCA, (2) computer mini-jack	Compatibility	VGA, SVGA, XGA, SXGA, MAC
Outputs	Computer: (1) 15 pin; Audio: (1) stereo mini jack; Control port: (2) for mouse operation	Warranty	Two-year parts and labor (120 day lamp guarantee)
Audible Noise	39 dB	Accessories	Remote control, VGA cable, MAC adapter, PS/2, serial and MAC mouse cables, lens cap, dust cover
Audio	(2) Built-in 2 watt speakers with audio loop-through	Optional Accesories	Short zoom lens, semi-long zoom lens, ceiling mount plate and suspension pole, various carrying cases
Video	PAL, SECAM, NTSC, NTSC 4.43, PAL M, PAL N, 1080i, 1035i, 720p, 575p, 480p		
Weight	15.2 lb/6.9 kg		