

AVANZA HD7c

AVANZA HD7C



The AVANZA model HD7c is a DLP laser projector with HDTV 1920 x 1080 resolution and a contrast of 10000:1. Thanks to the laser technology, the projector has a light life of up to 20000 hours, which is over 13.7 years if enjoyed for four hours a day. The integrated lens shift provides freedom when positioning the projector. 787 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, max. 525 cm is recommended here. The model is also Full HD 1080P compatible. The model was built by AVANZA in 2015 and is no longer current.

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting



1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector
Screen

6000

10000:1 full on/off

0,6000 min. Lumen

Vert.: +60% -20% Hori.: +/-10%

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered

optional

optional

-

HDMI in

2 x D-sub 15pin in

Cinch Video in

S-Video in

RS232C Din 9 pin in

RJ45 in


Yes

Projector
Screen

2667 Lux (bei 200 cm Screen)

10000:1 full on/off

0,267 min. Lumen

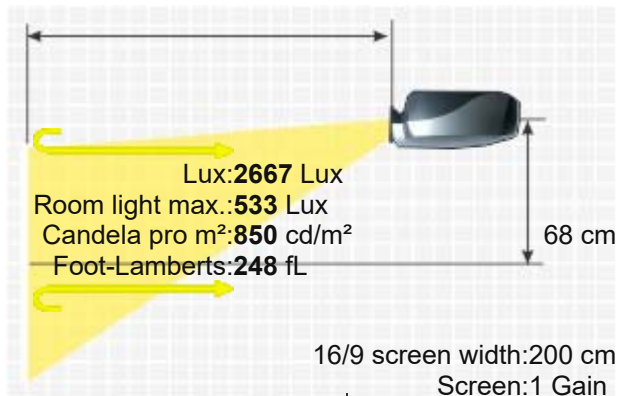


Power 800W
Size WxHxD 551 x 290 x 430 mm (21,7"x11,4"x16,9") 68,71 L/dm³
Operating Noise 39dB

Weight 28,00 kg / 61,73 lbs.
Keystone -
Illumination 90%

Frequenz Range max.: 165 MHz

Foot-Lamberts 248 fL / max. 787 cm screen width
850 cd/m²


- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - 24/7 continuous operation capable
 - Lan network compatible.

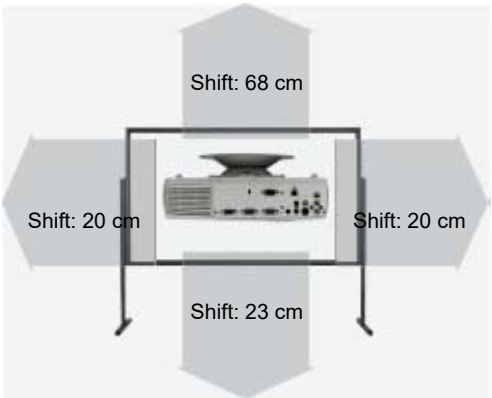

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AP-HLA37	3.67-6.98:1	7.3-14 m	60-20%	+/-10%	
AP-HLA20	1.94-3.67:1	3.9-7.3 m	60-20%	+/-10%	Powered
AP-HLA15	1.45-1.94:1	2.9-3.9 m	60-20%	+/-10%	Powered
AP-HLA12	1.21-1.45:1	2.4-2.9 m	60-20%	+/-10%	Powered
Fix Optional Lenses					
AP-HLA07	0.77:1	1.5 m	0.00% Fix		No Zoom

Status 2015 Discontinued (EOL) // Last update of the data: 2024-10-02

Data



More Details



HCinema

<https://www.projector-database.com/pro/avanzahd7c-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.