


# Barco SLM R10 Performer



BARCO SLM R10 PERFORMER



## Brief Introduction

Beta 2.5

With the SLM R10 Performer, manufacturer Barco offers a DLP projector with SXGA 1280 x 1024 resolution and a contrast of 800:1. With the lens shift function, the projector can be positioned very freely. 847 cm image width, the projector will be able to illuminate well. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 565 cm. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model was built by Barco in 2004 and is no longer current. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.

## Display Type



3 x DLP DMD Chip  
SXGA 5/4 Ti Digital Light Processing Chip

## Ansi-Lumen

10000 3033 Lux (bei 203 cm Screen)

## Contrast

800:1 full on/off 800:1 full on/off

## Black Level

12,5000 min. Lumen 3.807 min. Lumen

## Lens shift

Vert.: +50% -12,5% Hori.: +/-32,5% motorisch max.

## Resolution

SXGA 1280 x 1024

1.310.720 Pixel

## Video Modes

UXGA 1600 x 1200 compressed

## Application

NTSC, PAL, SECAM, NTSC 4.43, EDTV 480p, 576p HDTV 1080i, 720p

Grossanlässe | Permanent installation in the lecture hall, large training rooms and events.

Very large screen width and rooms with plenty of light and shaded daylight.

## Light Source

2200W Xenon Lamp

Articel Nr.: R9841810

## Light Life

500 h.

## Operating Costs

-

## Focus

Powered

## Zoom

Powered

## Objective

optional

## Throw Ratio

optional

## Audio

No

## Connections

S-Video

5 x BNC RGBHV

RS232C

SDI in

2 x DVI in und out

## Ceiling Mounting

Yes

## Power


2750W

## Size WxHxD

585 x 426 x 876 mm (23"x16,8"x34,5") 218,31 L/dm³

## Operating Noise

58dB

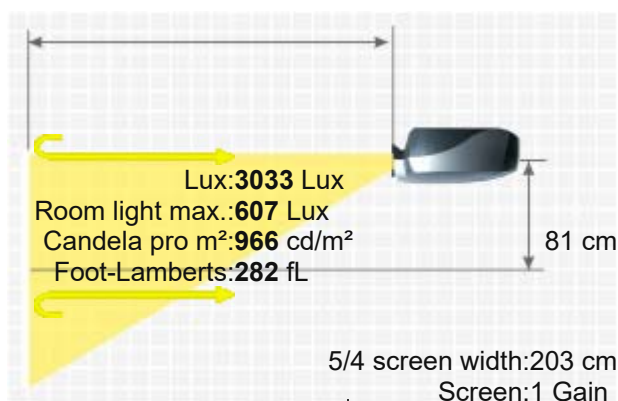

## Weight

57,00 kg / 125,66 lbs.

## Keystone

-

## Illumination

90%

Frequenz

-

Foot-Lamberts

282 fL / max. 847 cm screen width


966 cd/m²

- Lens shift Funktion motorisch max.
- Freeze
- Kensington Slot
- Gamma correction
- Warping
- Edge Blending
- Picture-in-Picture
- Password protection
- Digital Zoom
- RJ45 optional
- SDI and HD-SDI optional

Features

Optional

- Lamp original R9841810
  - Refurbished lamp original R9841820
  - SLM dust filters (24-pack) original R84540924K
- Order here: <https://www.hcinema.de/lampen/shop-en.php?id=555>

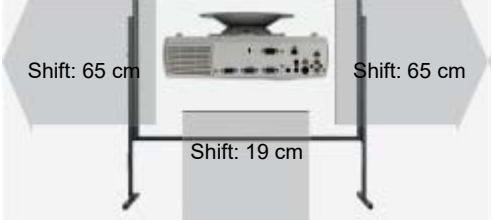

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Barco TLD5.0-8.0:1	4.9-8.02:1	9.9-16.3 m	50-12.5%	+/-32.5%	Powered
Barco TLD2.8-5.0:1	2.76-4.91:1	5.6-10 m	50-12.5%	+/-32.5%	Powered
Barco TLD2.0-2.8:1	1.92-2.72:1	3.9-5.5 m	50-12.5%	+/-32.5%	Powered
Barco TLD1.6-2.0:1	1.55-1.94:1	3.1-3.9 m	50-12.5%	+/-32.5%	Powered
Fix Optional Lenses					
Barco TLD1.2:1	1.2:1	2.4 m	42-12.5%	+/-29.5%	No Zoom
Barco TLD0.8:1	0.82:1	1.7 m	15-12.5%	+/-10%	No Zoom

Status Data 2004 Discontinued (EOL) // Last update of the data: 2023-10-26

More Details



HCinema

<https://www.projector-database.com/pro/barcoslrmr10performer-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.