

Benq LU960UST

BENQ LU960UST



A brief introduction to the Benq LU960UST. The short-throw DLP laser projector has a WUXGA 1920 x 1200 resolution and a contrast of 3000000:1. The laser gives it a lifespan of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. Furthermore, the projector can play 1080P without any problems and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. The model was built by Benq in 2021 and is no longer current, but is still a popular projector in our database.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,48" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 5200 Screen 2311 Lux (bei 200 cm Screen)

Contrast

Projector 3000000:1 full on/off Screen 3000000:1 full on/off

Black Level

Projector 0,0017 min. Lumen Screen 0,001 min. Lumen

Offset

Resolution

WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Short Distance | Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

Laser

Light Life

20000 h. / 38000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,25:1

Audio

10W

Connections

2x HDMI in
HDMI out
Display Port
D-sub 15pin in und out
3D Sync in und out
HDBaseT



Mini Jack Audio in und out
 USB in
 RS232C Din 9 pin in
 RJ45 in
 Wired Remote
 12V Trigger out




Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 450W / 339W in Eco Mode
 480 x 157,4 x 473 mm (18,9"x6,2"x18,6") 35,65 L/dm³
 37 / 35 dB in Eco Mode

Weight
 Keystone
 Illumination

12,20 kg / 26,46 lbs.
 Vert.: +/-30°
 Hori.: +/-30°
 -

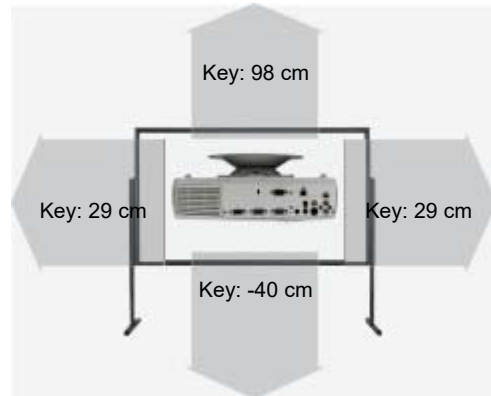

Frequenz
 Foot-Lamberts

H-sync: 15-102 kHz
 V-sync: 23-120 Hz
 215 fL / max. 733 cm screen width
 737 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- 360° installable
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- AMX

Optionaler Zubehör



Deckenhalterung Länge 225 mm

Halterung45

85,80 €

Status

2021 Discontinued (EOL) // Last update of the data: 2025-02-10
 Created: 2021-05-18 14:36:18

Data



More Details



HCinema

<https://www.projector-database.com/pro/benqlu960ust-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.