


Benq MH760

BENQ MH760

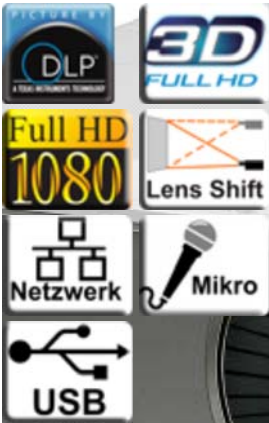

The standard portable Benq MH760 3D DLP projector has 5000 Ansi lumens, a contrast of 3000:1 and an HDTV 1920 x 1080 resolution. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a picture width of 718 cm well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm here. The model is also Full HD 1080P and 3D compatible. The model was built by Benq in 2017 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5000

2222 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,6667 min. Lumen

0,741 min. Lumen

Lens shift

Vert.: +60,5% --48,5%

HDTV 1920 x 1080

Resolution

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

370W Lamp

Articel Nr.: 5J.JDP05.001

Light Life

2000 h. 2500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=2,59-2,87 f=16,88-21,88 mm

Throw Ratio


1,15-1,5:1

Audio

-

Connections

2 x HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
Mikrofon in

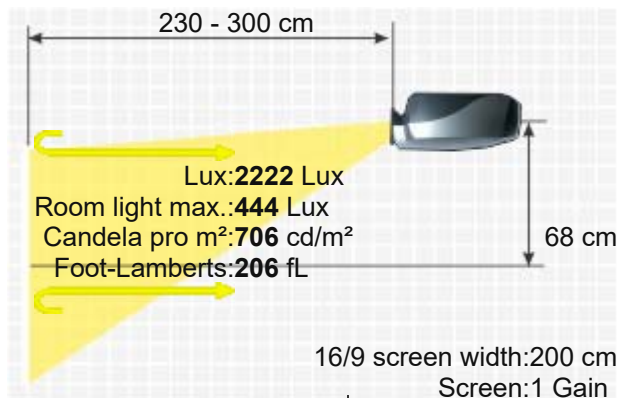

USB Typ B in
RS232C Din 9 pin in
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
490W
411,4 x 118,4 x 267,5 mm (16,2"x4,6"x10,5") 12,95 L/dm³
36 / 33 dB in Eco Mode

Weight
Keystone
Illumination

4,90 kg / 8,82 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz

H-sync: 15-102 kHz
V-sync: 24-120 Hz

Foot-Lamberts

206 fL / max. 718 cm screen width
706 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Password protection
- Lan network compatible.



Optional

Lamp original 5J.JDP05.001
Remote control original 5J.JA606.001, 5J.J8A06.011, RCA022, RCA021J

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=24622>
2017 Discontinued (EOL) // Last update of the data: 2023-10-26

Data

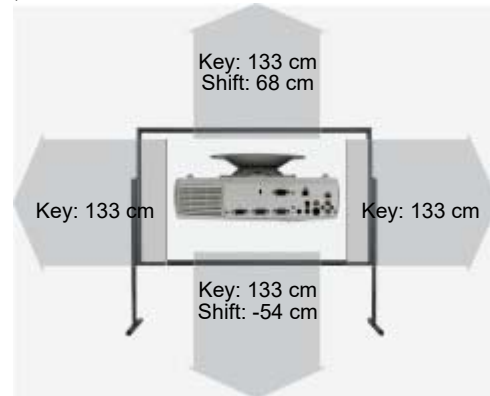

More Details



HCinema

<https://www.projector-database.com/pro/benqmh760-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.