

Benq TH534

BENQ TH534



The standard portable TH534 3D DLP projector from Benq has 3300 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The lamp life is specified by the manufacturer as 10000 hours, which is over 13.7 years if enjoyed for two hours a day. 584 cm image width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 389 cm. The model is also Full HD 1080P and 3D compatible. The model was built by Benq in 2019 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

3300 1467 Lux (200 cm Screen width)

Contrast

15000:1 15000:1

Black Level

0,2200 min. Lumen 0,098 min. Lumen

Offset

-

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

203W Lamp

Article Nr.: 5J.JG705.001

Light Life

4500 h. 10000 h. in Eco Mode

Operating Costs

10% / 0,04 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,42-2,62 f=19-22,65 mm

Throw Ratio


1,37-1,64:1

Audio

1 x 2W

Connections

2 x HDMI in
D-sub 15pin 2x in und out
Cinch Video in
S-Video in
Mini Jack Audio in und out
USB in
RS232C Din 9 pin in

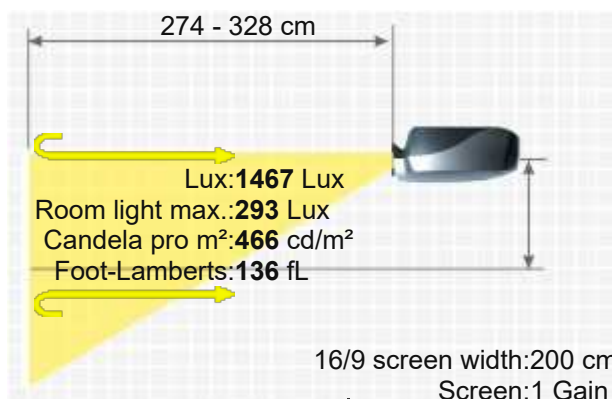



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
252W / 211W in Eco Mode
333 x 99 x 215 mm (13,1"x3,9"x8,5") 7,09 L/dm³
32 / 28 dB in Eco Mode

Weight
Keystone
Illumination

2,42 kg / 5,34 lbs.
-
-

Frequenz

H-sync: 15-102 kHz
V-sync: 23-120 Hz

Foot-Lamberts

136 fL / max. 584 cm screen width
466 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.

Screen Mirroring

-



Optional accessories

	Nackte Osram Lampe	NLMP25015	58,61 €
	Lampe Ruby	Ruby-LMP25015	93,96 €
	Lampe Original	5J.JG705.001	172,18 €
	Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	5J.JG706.001, RCX013	24,28 €
	Lampe B-Ware	5J.JG705.001	141,79 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2019 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2019-11-12 21:11:24



More Details



HCinema

<https://www.projector-database.com/pro/benqth534-en.html>