

Epson USA PowerLite Z8050W/NL

EPSON USA POWERLITE Z8050W/NL



The stationary PowerLite Z8050W/NL LCD has 7000 Ansi lumens, a contrast of 5000:1 and a WXGA 1280 x 800 resolution. The integrated lens shift gives freedom when positioning the projector. An image width of up to 850 cm is possible as the projector has 7000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 567 cm. The model is also Full HD 1080P compatible. The projector was launched in 2009 and is no longer sold by the manufacturer.



3 x 0,95" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector

7000 / 5600 im Eco Mode

Contrast

5000:1 full on/off

Black Level

1,4000 min. Lumen

Lens shift

Vert.: +/-70% Hori.: +/-20% motorisch

Resolution

WXGA 1280 x 800

Video Modes

1.024.000 Pixel
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Very large screen width and rooms with plenty of light and shaded daylight.
2 x 330W UHE Lamp

Light Life

Articel Nr.: V13H010L51
2500 h. 3500 in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,59

Objective

F=1,65-2,51 f=36-57,35 mm

Throw Ratio

1,76-2,8:1

Audio

-

Connections


HDMI 1.3a in
DVI-D mit HDCP in
5 x BNC RGBHV in
D-sub 15 pin in
RJ45 in
RS232C


Screen

2800 Lux (bei 200 cm Screen)

5000:1 full on/off

0,56 min. Lumen

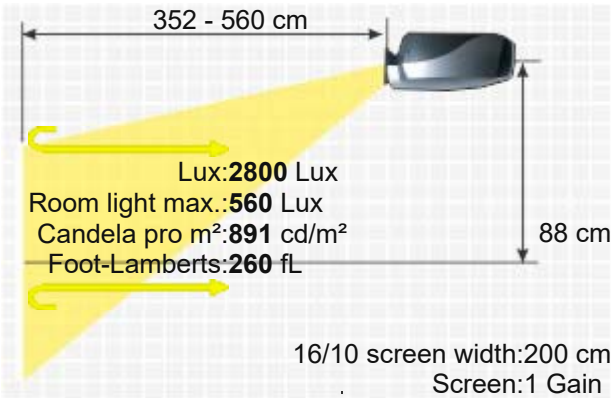

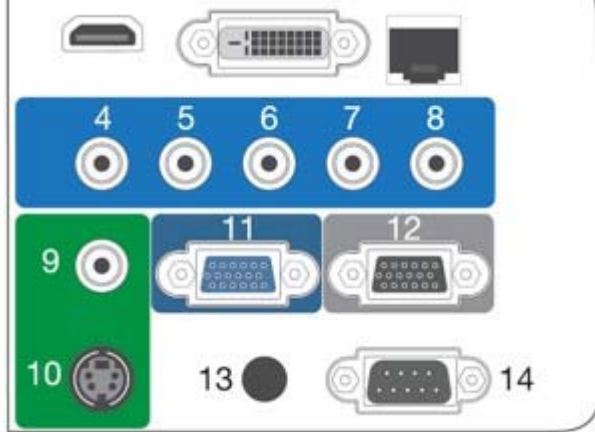

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
877W / 734W in Eco Mode
534 x 167 x 734 mm (21"x6,6"x28,9") 65,46 L/dm³
38 / 32 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

22,00 kg / 48,5 lbs.
Vert.: +/-30°
Hori.: +/-20°
90%
H-sync: 15-80 kHz
Range max.: 162 MHz
260 fL / max. 850 cm screen width
891 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Features


- Single Philips bulb only NLMP19134
- Dual lamp ruby Ruby-LMP19136
- Single lamp ruby Ruby-LMP19134
- Single lamp original ELPLP51 / V13H010L51
- Twin lamp original ELPLP52 / V13H010L52
- Compatible lamp LMP-K19133
- Compatible lamp LMP-K19135
- Universal Remote original Fernb-uni-V3
- Object lens original ELPLM07 / V12H004M07
- Object lens original ELPLL07 / V12H004L07
- Object lens original ELPLM06 / V12H004M06
- Object lens original ELPLR04 / V12H004R04
- Object lens original ELPLS04 / V12H004S04
- Object lens original ELPLW04 / V12H004W04

Optional

- Air filter compatible Alternative zu:ELPAF23 / V13H134A23 / 1508956
- Remote control original 1512200
- Air filter original ELPAF23 / V13H134A23 / 1508956

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19134>

Optional Lenses

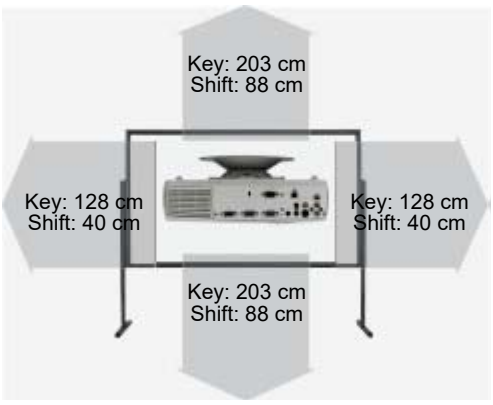

Name	Ratio	Distance	Shift V	Shift H	Zoom
------	-------	----------	---------	---------	------

Zoom Optional Lenses					
ELPLW04	1.29-1.77:1	2.6-3.5 m	+/-70%	+/-20%	Powered
ELPLS04	1.71-2.78:1	3.4-5.6 m	+/-70%	+/-20%	
ELPLM07	3.85-5.88:1	7.7-11.8 m	+/-70%	+/-20%	Powered
ELPLM06	2.64-4.03:1	5.3-8.1 m	+/-70%	+/-20%	Powered
ELPLL07	5.76-8.09:1	11.5-16.2 m	+/-70%	+/-20%	Powered

Fix Optional Lenses					
ELPLR04	0.76:1	1.5 m	0.0% Fix		No Zoom

Status Data2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/EpsonPowerLiteProZ8050WNL-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.