

Boxlight Boston WX31NST



Brief Introduction

Beta 2.5

A brief introduction to the Boston WX31NST: The boxlight LCD projector offers 3100 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. This projector has a projection ratio of just 0.615:1. For a 2 m wide image, the projector only needs to be 123 cm away from the screen. Playing 1080P is also no problem for the projector. The model was built by Boxlight in 2015 and is no longer current.

Display Type

3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Ansi-Lumen

3100 / 2200 im Eco Mode 1240 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level Offset

1,0333 min. Lumen 0,414 min. Lumen

Resolution

WXGA 1280 x 800
1.024.000 Pixel
UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

245W Lamp

Light Life

4000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,615:1

Audio

1 x 10W

Connections

HCMI in
D-Sub 15 pin in und out
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A in
Mini Jack Audio in und out
RS232C
RJ45 in

Ceiling Mounting

Yes

Power


284 / 200W Im Eco Mode

Size WxHxD

348 x 132 x 360 mm (13,7"x5,2"x14,2") 16,54 L/dm³

Operating Noise

38,5 / 33,5 dB in Eco Mode

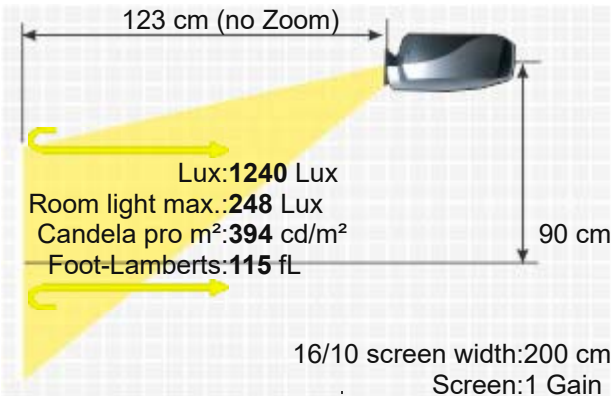

Weight

4,10 kg / 9,04 lbs.

Keystone

Vert.: +/-30°

Illumination

-

Frequenz
H-sync: 48-120 kHz
V-sync: 31-92 Hz

Foot-Lamberts
115 fL / max. 566 cm screen width

394 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Lan network compatible.
 - Short-throw projector

Status
2015 Discontinued (EOL) // Last update of the data: 2023-08-04

Data
Created: 2015-08-21 13:40:56



More Details



HCinema

<https://www.projector-database.com/pro/boxlightbostonwx31nst-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.