

Boxlight ProjectoWrite3 P3 X32N



With the ProjectoWrite3 P3 X32N, manufacturer Boxlight offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 600:1. The projector will be able to illuminate a screen width of 493 cm well. However, if room light is available, the picture width should ideally not exceed 329 cm. The projector also offers a whiteboard function that makes training and presentation rooms interactive. The model was built by Boxlight in 2012 and is no longer current.

Brief Introduction

Display Type

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen Contrast Black Level Offset

3200 / 2400 im Eco Mode
600:1 full on/off
5,3333 min. Lumen
1067 Lux (bei 200 cm Screen)
600:1 full on/off
1,787 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

210W UHP Lamp
Articel Nr.: SEATTLEX30N-930

Light Life

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom 1,19

Objective

-

Throw Ratio

1,45-1,73:1

Audio

1 x 8W

Connections

HDMI in
DVI-I
2 x D-sub 15 pin in
S-Video in
Cinch Video in
Cinch Stereo in
RJ45 in
RS232C
Mini Jack Audio

Ceiling Mounting Power

Yes
310W

Size WxHxD

361 x 132 x 348 mm (14,2"x5,2"x13,7") 16,58 L/dm³

Operating Noise

36 / 33 dB in Eco Mode

Weight


4,08 kg / 8,99 lbs.


Keystone

Vert.: +/-30°

Illumination

80%

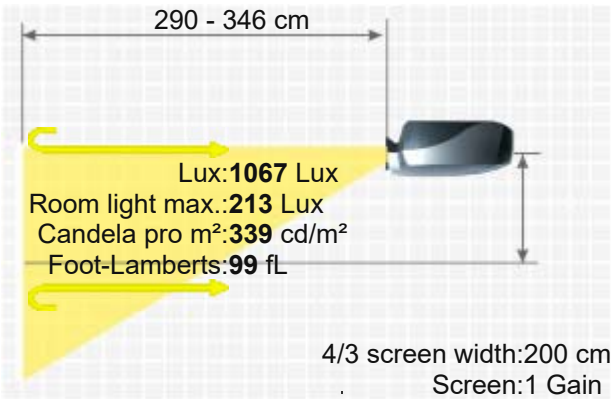

Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz	
Foot-Lamberts	99 fL / max. 493 cm screen width 339 cd/m²	
Features	<ul style="list-style-type: none">■ Freeze■ Blackboard Modus■ Eco Mode■ Kensington Slot■ Remote control with laser pointer und mouse control■ Lan network compatible.■ 4x zoom■ Intel Pentium-M 1.5GHz■ Whiteboard function.	
Status Data	2012 Discontinued (EOL) // Last update of the data: 2023-08-04	

More Details		HCinema https://www.projector-database.com/pro/boxlightprojectowrite3x32n-en.html
--------------	---	---

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.