

Canon LV 7380

CANON LV 7380



A brief introduction to the LV 7380: The Canon standard portable LCD projector offers 3000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours every day. 477 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 318 cm. The model was built by Canon in 2010 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

6,0000 min. Lumen

2,012 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

180W NSHA Lamp

Articel Nr.: LV-LP32

Light Life

4000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-2,0 f=19,8-23,7 mm

Throw Ratio

1,5-1,8:1

Audio

7W Mono

Connections

DVI-I mit HDCP in

D-sub 15 pin in und out

S-Video in

Cinch Video in

Cinch Stereo in


Mini Jack Audio in und out

RJ45 in

RS232C

Ceiling Mounting

Yes

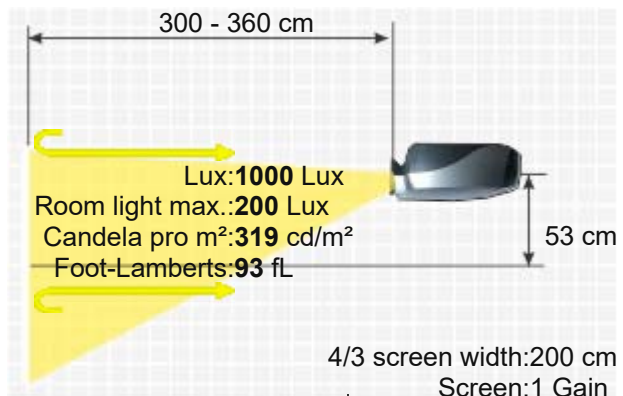

Power 239 / 196W in Eco Mode
Size WxHxD 317 x 111 x 336 mm (12,5"x4,4"x13,2") 11,82 L/dm³
Operating Noise 35 / 29 dB in Eco Mode

Weight 3,30 kg / 7,28 lbs.
Keystone Vert.: +/-30° automatisch
Illumination 85%

Frequenz -

Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²

- Features
- Freeze
 - User logo
 - Eco Mode
 - Automatic and manual vertical keystone correction
 - sRGB
 - Lan network compatible.

	Bulb only	NLMP19554
	Lamp ruby	Ruby-LMP19554
	Lamp original	LV-LP32 / 4330B001AA
	Compatible lamp	LMP-K19554
Optional	Remote compatible	Alternative zu:7N900901 / RD-445E / RMT-PJ29
	Remote control original	7N900901 / RD-445E / RMT-PJ29
	Air filter back original	24FU0381
	Air filter original	24FU0391
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19554>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/canonlv7380-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

