

Casio XJ S37



CASIO XJ S37



Brief Introduction

Beta 2.5

With the XJ S37, manufacturer Casio offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 1800:1. Thanks to the brightness of 2300 Ansi lumens, a picture width of 418 cm is possible. In room light, the picture should be max. 279 cm wide. The model was built by Casio in 2008 and is no longer current. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.

Display Type

1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2300 767 Lux (bei 200 cm Screen)

Contrast

1800:1 full on/off 1800:1 full on/off

Black Level

1,2778 min. Lumen 0,427 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

210W Lamp

Articel Nr.: YL-3A / 10310742

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

2,0

Throw Ratio

1,4-2,8:1

Audio

1W Mono

Connections

D-Sub 15 pin in

AV Video in

USB Typ A

RS232C

Ceiling Mounting

Yes

Power

270 / 220W in Eco Mode

Size WxHxD

270 x 43 x 199 mm (10,6"x1,7"x7,8") 2,31 L/dm³

Operating Noise

35 / 31 dB in Eco Mode

Weight

1,80 kg / 3,97 lbs.

Keystone

Vert.: +/-30° automatisch

Illumination

-


Frequenz

H-sync: 31-68 kHz


V-sync: 56-85 Hz

Foot-Lamberts

71 fL / max. 418 cm screen width

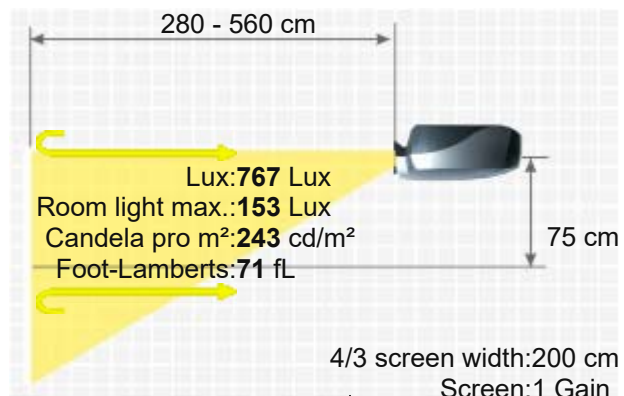

243 cd/m²



- Direkt Power Off
- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Password protection
- Remote control with laser pointer
- Wi-Fi network compatible.
- 2x digital zoom,

Features

Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/casioxjs37-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.