

Chinavasion CVYI-E276



CHINAVASION CVYI-E276



The Chinavasion model CVYI-E276 is an LCD projector with SVGA 800 x 600 resolution and a contrast of 100:1. The manufacturer specifies a lamp life of 20000 hours, which converts to over 27.4 years at 2 hours. The integrated media player allows files to be played directly. The projector can illuminate images up to 123 cm wide thanks to its 200 Ansi lumens. In room lighting, however, the picture width should ideally be less than 82 cm. The model was built by Chinavasion in 2013 and is no longer current.

1 x LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector	200	67 Lux (bei 200 cm Screen)
Contrast	100:1 full on/off	100:1 full on/off
Black Level Offset	2,0000 min. Lumen	0,69 min. Lumen

Resolution
SVGA 800 x 600
480.000 Pixel

Video Modes
Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: Video: AVI, ASF, MP4, MPEG2, MPEG3, MPEG4, RM/RMVB, FLV
Audio: MP3, WMA, WAV, ACC/ACC+, MPEG1/2/2.5 Picture: JPEG, BMP Discs: DVD, CD
Standard-Portabel | External training and company presentations, as well as product presentations.

Application
Very narrow picture width and rooms with very little light.

Light Source
Light Life
20000 h.

Operating Costs
-

Focus
Manual

Zoom
No Zoom

Objective
F=+

Throw Ratio
-

Audio
2W x2

Connections
HDMI in
D-sub 15pin in
Cinch Video in
Cinch Stereo in und out
S-Video in
Mini Jack Audio in und out
2 x USB in
SD Card Slot in

Ceiling Mounting
Yes

Power
90W


Size WxHxD
350 x 140 x 262 mm (13,8"x5,5"x10,3") 12,84 L/dm³

Operating Noise
-

Weight
3,49 kg / 7,69 lbs.

Keystone
-

Illumination
-

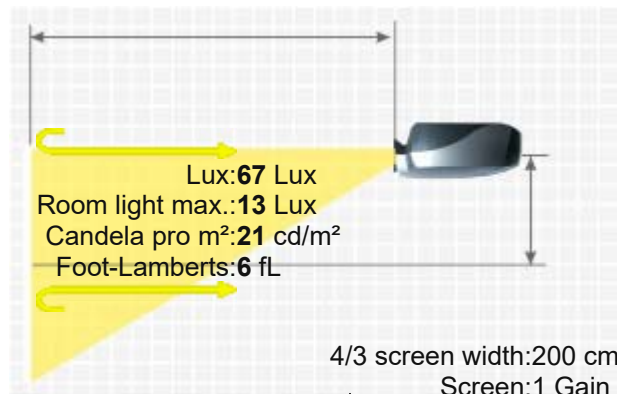

Frequenz	-
Foot-Lamberts	6 fL / max. 123 cm screen width
	21 cd/m²
Features	Integrated Mediaplayer SD Card Slot
Status Data	2013 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/chinavasionCVYIE276-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.