


Christie Matrix HD2



Brief Introduction

Beta 2.5

The Christie Matrix HD2 model is a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 1500-2000:1. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 2300 Ansi lumens, a picture width of 487 cm is possible. In room light, the image should be max. 325 cm wide. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Even 1080P video signals are no problem for the projector. The model was built by Christie in 2007 and is no longer current. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.

Display Type



3 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 2300

Screen 1022 Lux (bei 200 cm Screen)

Contrast

Projector 1500-2000:1 full on/off

Screen 1500-2000:1 full on/off

Black Level

Projector 1,5333 min. Lumen

Screen 0,682 min. Lumen

Lens shift

Vert.: +/-59,5% Hori.: +/-21% motorisch

HDTV 1920 x 1080

Resolution

2.073.600 Pixel

QXGA 2048 x 1536 compressed

Video Modes

PAL, SECAM, NTSC, EDTV HDTV 720p, 1080i, 1080p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

500W Xenon Lamp

Article Nr.: 003-120118-01 /

03-000832-01P

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

nein

Connections

5 x BNC RGBHV in

DVi-I in

Cinch Video in

S-Video in

RJ45

RS232C RS422C

weitere Anschlüsse Optional



Ceiling Mounting

Yes, is possible.

Power


1000W

Size WxHxD


660 x 313 x 566 mm (26"x12,3"x22,3") 116,92 L/dm³

Operating Noise

-

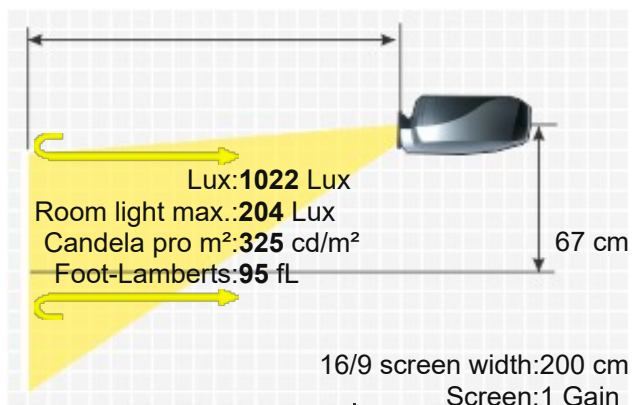

Weight	34,00 kg / 74,96 lbs.
Keystone	-
Illumination	90%
Frequenz	H-sync: 15-120 kHz V-sync: 23,97-150 Hz Range max.: 220 MHz
Foot-Lamberts	95 fL / max. 487 cm screen width 325 cd/m²
Features	■ Full HD 1080P compatible
	■ Lens shift Funktion motorisch
	■ Freeze
	■ Gamma correction
	■ Dynamic iris
	■ Edge Blending
	■ Picture-in-Picture
	■ Password protection
Screen Mirroring	■ Remote control with laser pointer
	■ Lan network compatible.
	-

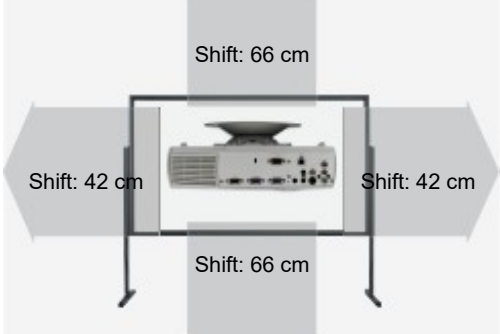

Optional accessories

Lampe Original	003-120118-01 / 03-000832-01P	EOL €
 Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
104-115101-01	4.08-6.89:1	8.2-13.8 m	+/-59.5%	+/-21%	Powered
104-114101-01	2.46-4.11:1	4.9-8.2 m	+/-59.5%	+/-21%	Powered
104-113101-01	1.9-2.6:1	3.8-5.2 m	+/-59.5%	+/-21%	Powered
104-112101-01	1.83-1.88:1	3.7-3.8 m	+/-59.5%	+/-21%	Powered
Fix Optional Lenses					
104-116101-01	1.19:1	2.4 m	+/-59.5%	+/-21%	No Zoom
104-111101-01	1.15:1	2.3 m	+/-59.5%	+/-21%	No Zoom
104-110101-01	0.71:1	1.4 m	+/-23.5%	+/-8.5%	No Zoom

Status Data 2007 Discontinued (EOL) // Last update of the data: 2025-03-03

More Details



HCinema

<https://www.projector-database.com/pro/christiematrixhd2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.