

LAZR

OUTDOOR PROJECTOR



LMEX

Q2 2022 Catalogue

L A Z R™ by L U M I T R I X®

the original

OUTDOOR PROJECTOR

Outdoor projectors face many challenges, such as dust, rain, humidity, varying temperature, sunlight radiation, severe weather, and vandalism. LM3X has been engineering and manufacturing outdoor projectors since 2012. We delivered + 200 projectors to more than 40 countries so far.

For the year 2022, we offer 2 outdoor projector models: The light and versatile L A Z R™ HDMI starts in Europe at EUR 11 990 MSRP. The fully standalone version L A Z R 4 G™ Unlimited Wireless Range costs EUR 17 990. With the power of 6K Lumens, each L A Z R™ illuminates up to 100 square meters (1000 square feet) of the surface. In the heart of the L A Z R™ projector glows the Laser DLP light source with 20 000 hours life span, enabling for long maintenance cycles.

L A Z R™ is compatible with all common digital projection tools and protocols including HDMI, Chromecast, Screen Mirroring, Madmapper, LIGHTFORM, HDBaseT, etc. Installing projectors outdoors?

Check this

Lukáš Brus CEO



LM3X
Lumitrix s.r.o
VAT ID: CZ29395950
Registered in Czech Republic
European Union

Contact

International Sales / Get in touch with our experts

info@LM3X.com

LM3X.com

Contents

5 Outdoor Projector

Overview & Dimension
Exploded View
Thunderstorm Ready
Operating Temperature Range
Technical Specification

17 Image

Screen Calculator
Multiprojection
Inspiration

31 Installation

Recommended Set-Ups
Wi-Fi Screen Sharing
HDMI Short Cable
HDBaseT Long Cable
LIGHTFORM Mapping Kit
miniMAD by Madmapper
4G Wireless Remote Mapping
Multiprojection Mapping

41 Accessories

Urban Mast
Wall/Post Fixture
360 Fixture
Tripod Eventor

53 Pricelist



LM3X Products
Legal
Notes

L A Z R


OUTDOOR PROJECTOR



Overview & Dimensions

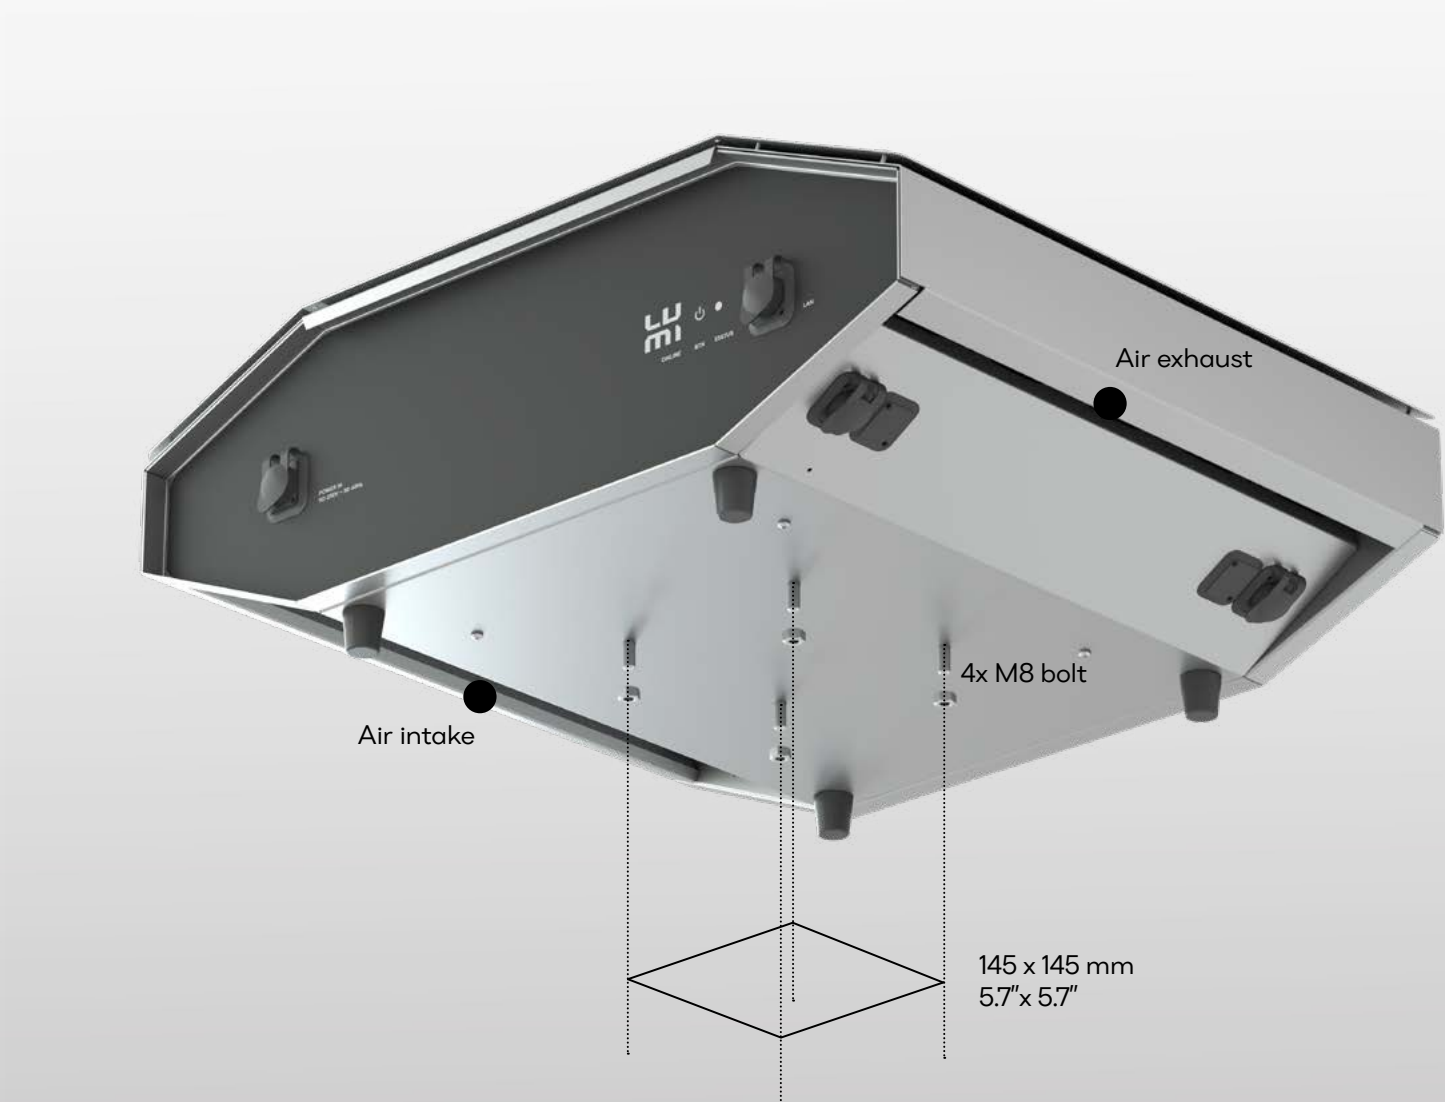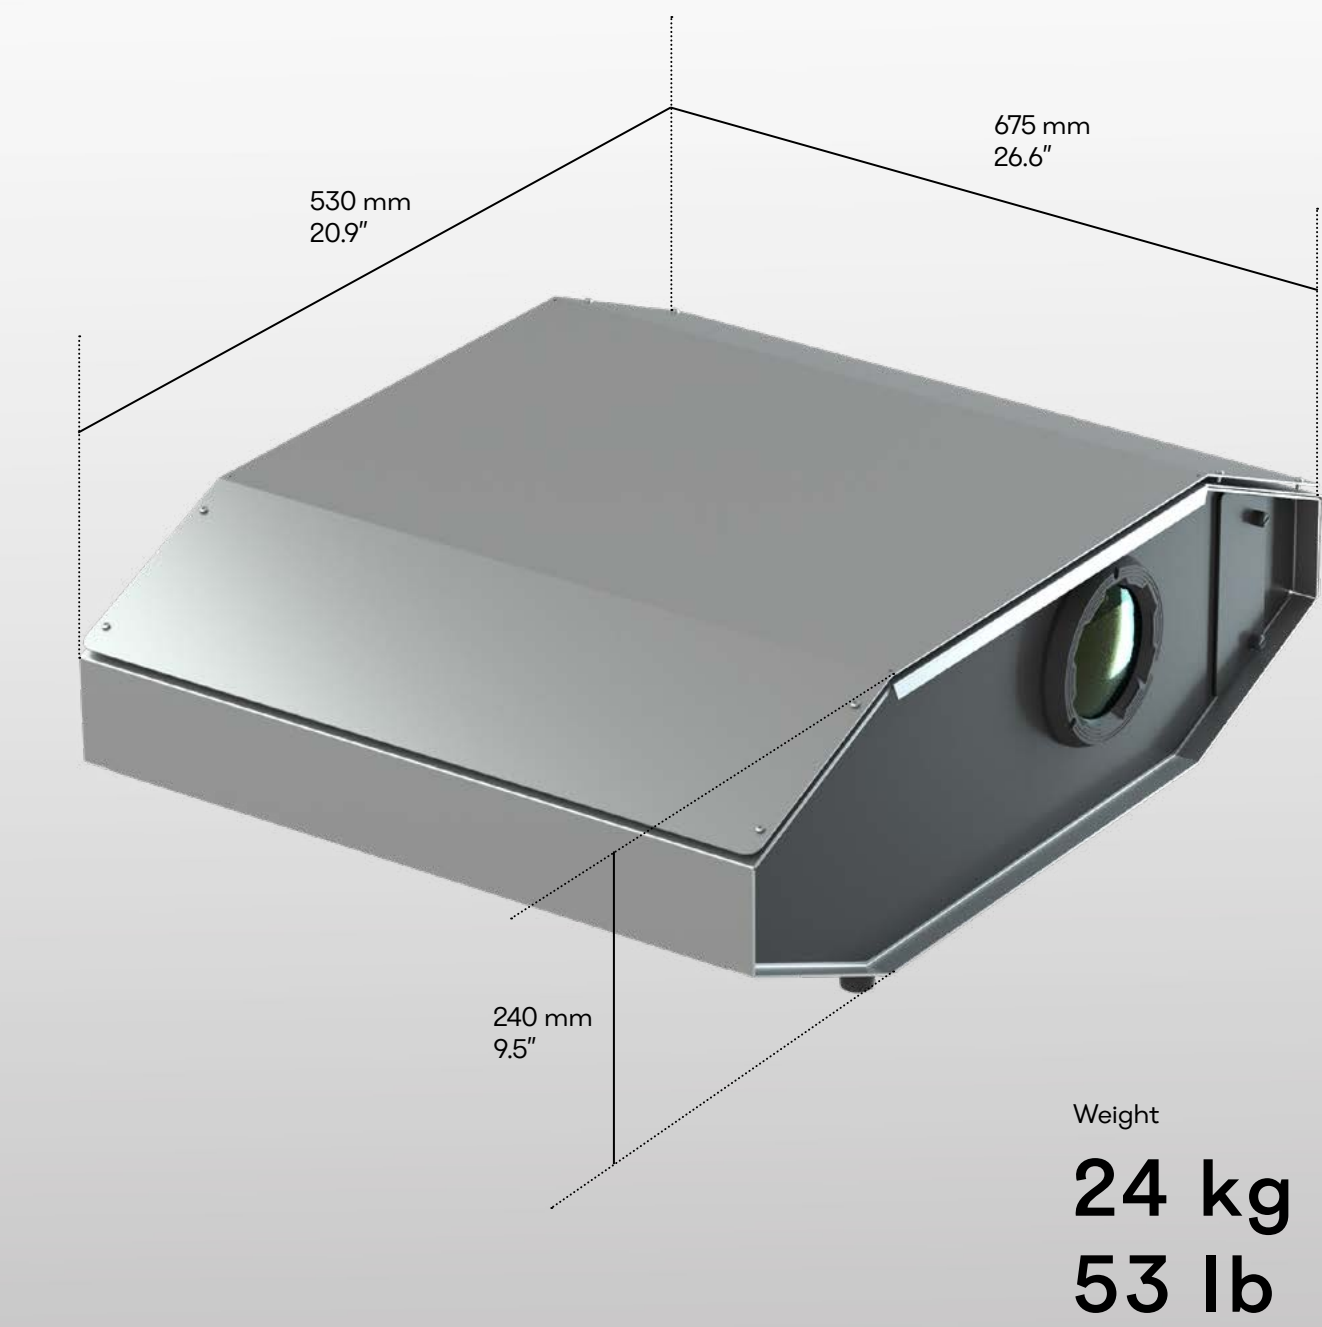

Exploded View

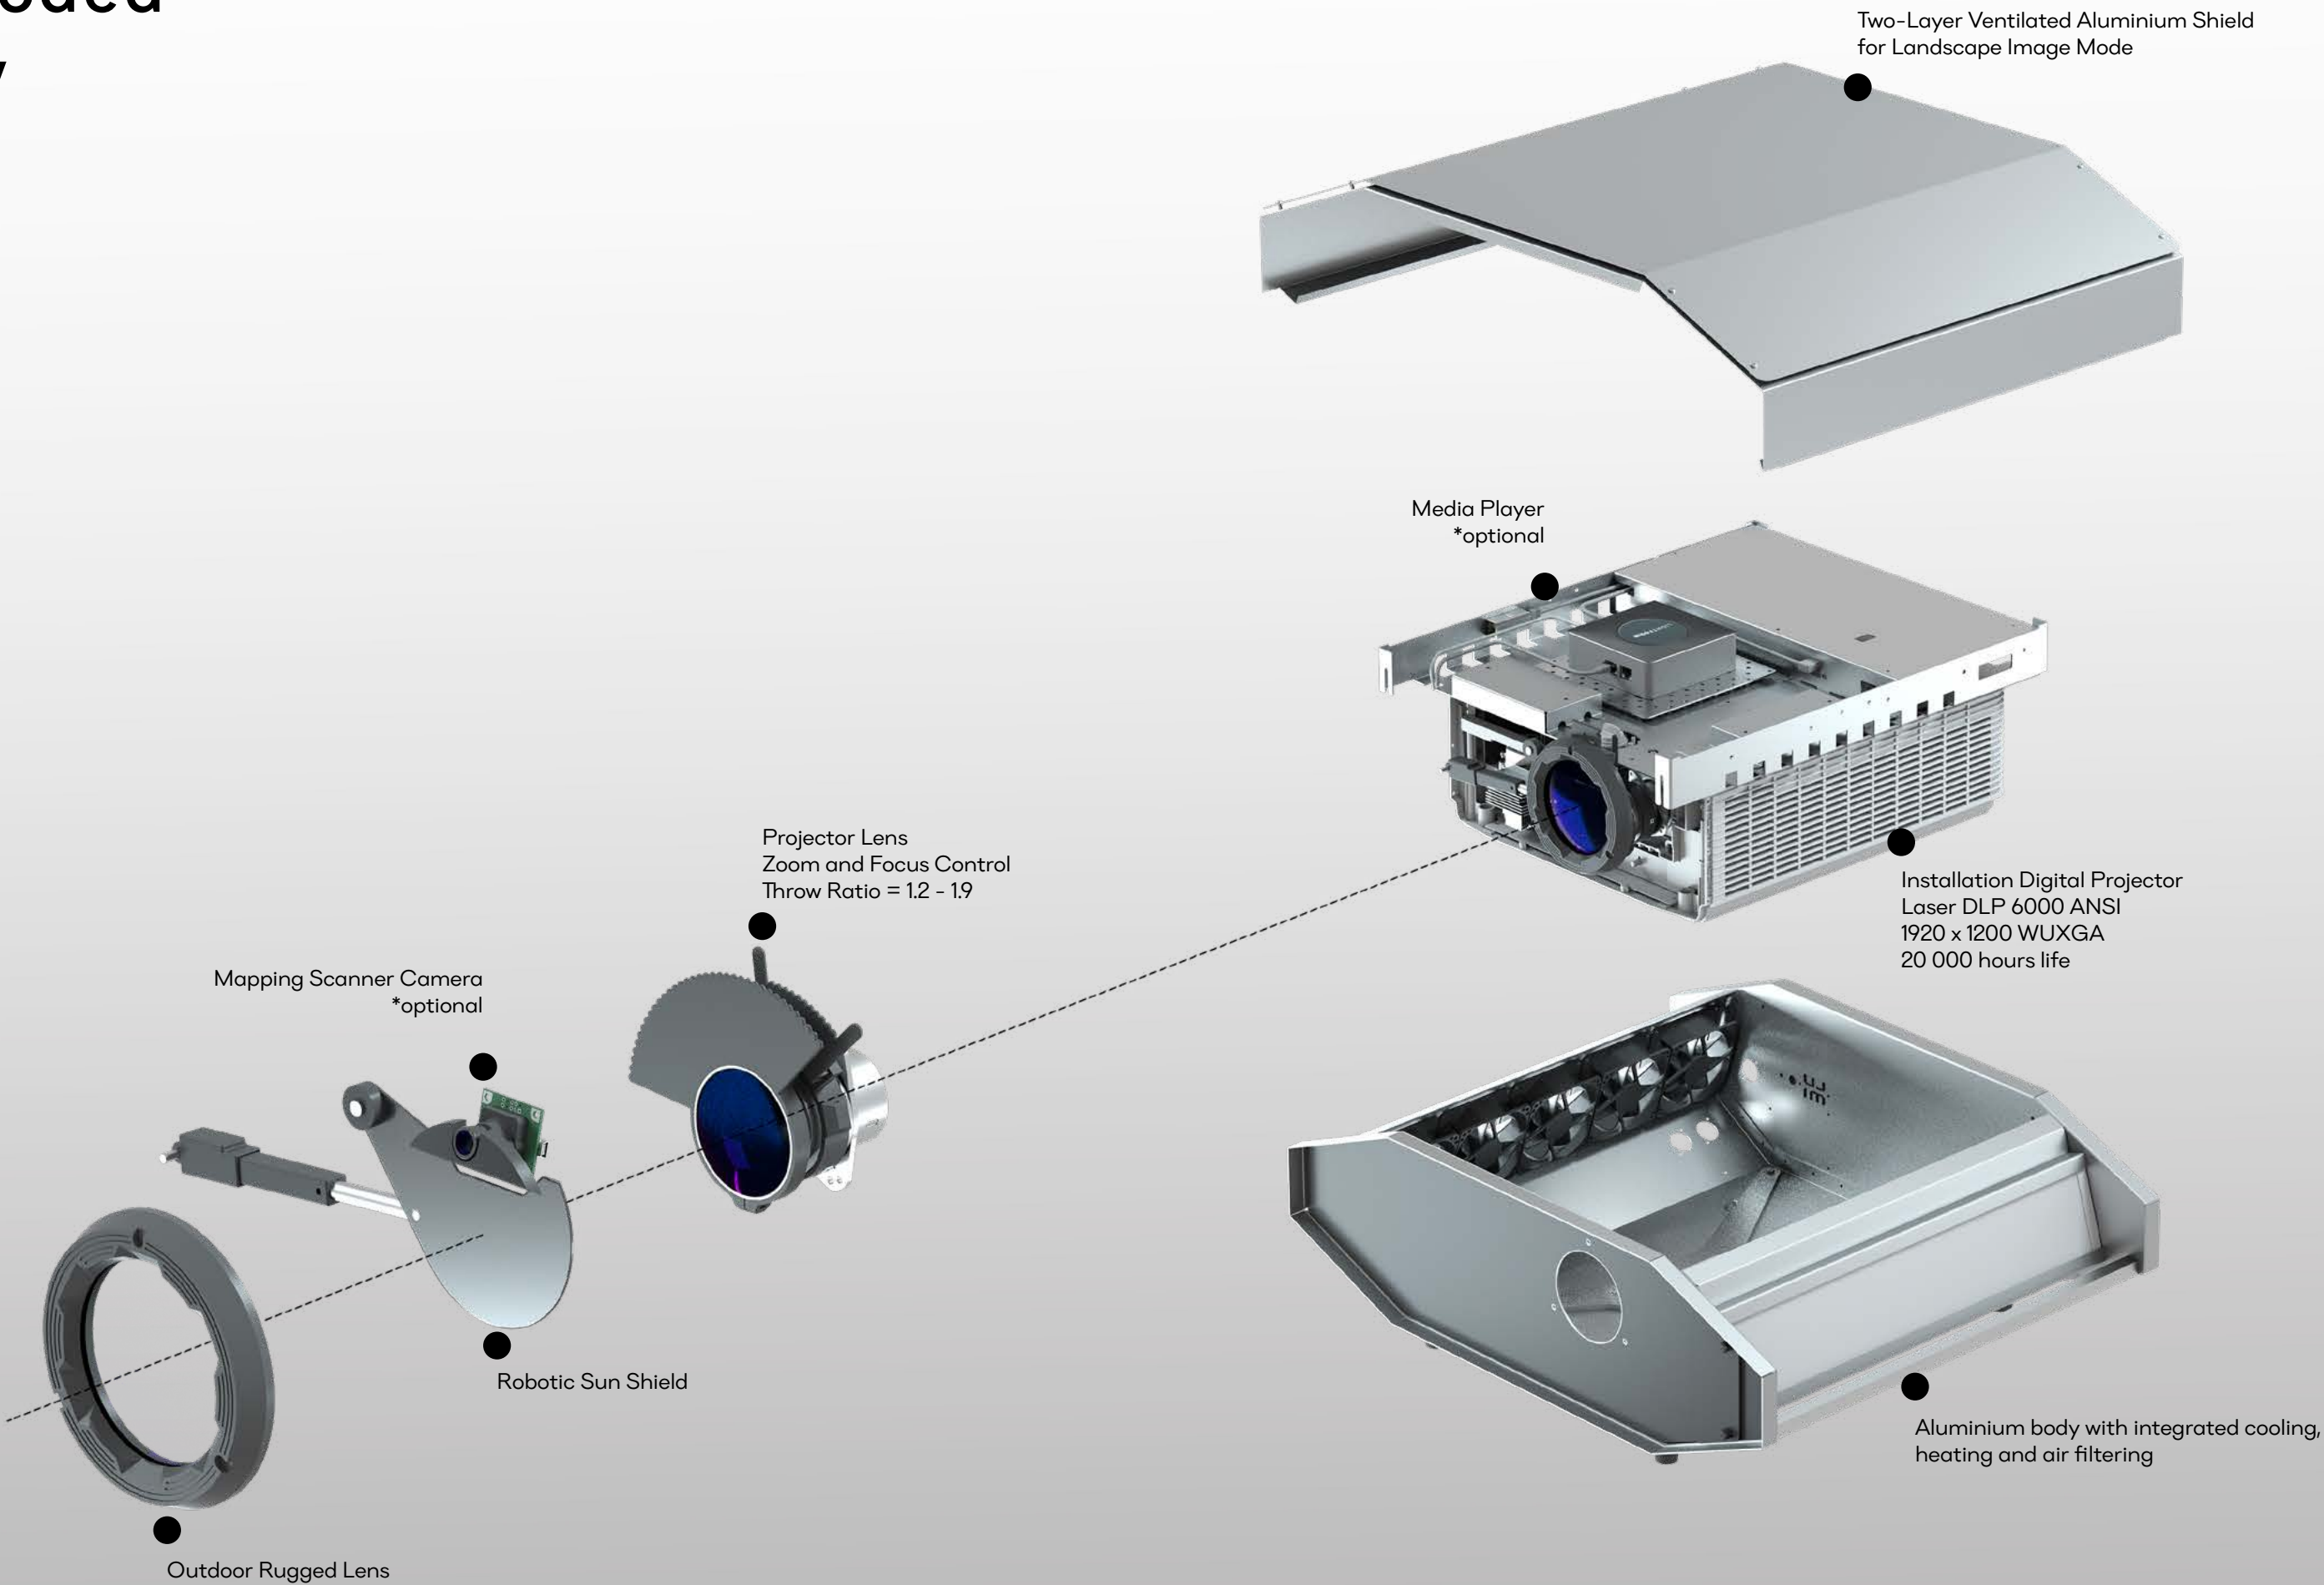



Thunderstorm Ready

Outdoor Humidity & Dust Resistance.
Designed for permanent outdoor use.
Projector Body IP43 Ingress Protection Certified.
All connectors IP68 Ingress Protection Certified.

Operating
Temperature
Range

+45°C
113 °F

-20°C
-4 °F



L A Z R™ Outdoor Projector



Robust Power Management

When power lost, the device goes to sleep. The device reboots to operation mode after the power supply is restored.

Technical Specification


L A Z R™ DIGITAL OUTDOOR PROJECTOR

Image Projection Technology	Laser DLP
Image Resolution	1920x 1200 WUXGA
Light Source Life	20000 h
Brightness	6000 ANSI lm
Throw Ratio	1.2 – 1.9
Power	550 W, 110 – 230V
Ingress Protection	IP 43 body, IP 68 connectors
Weight	24 kg / 53 lb
Default Image Orientation	Landscape Mode
Available Image Orientation Extention	Portrait Mode Kit



IMAGE


L A Z R

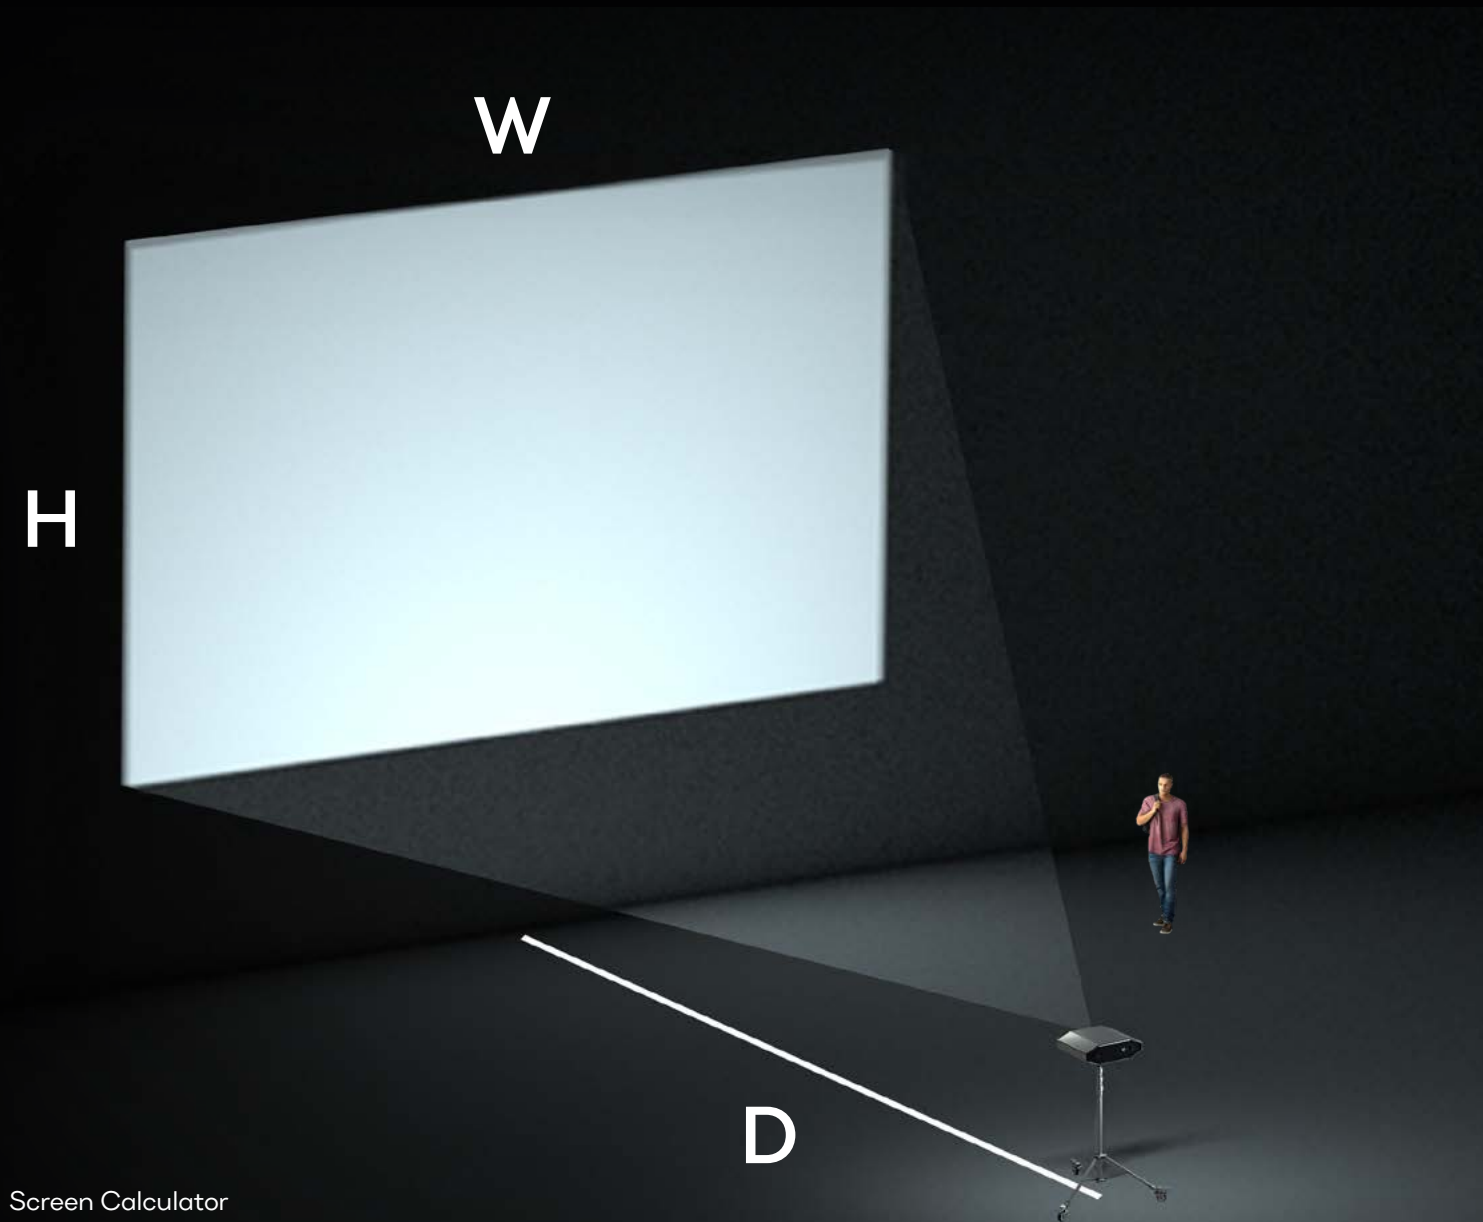

Screen Calculator

Metric

W m	5	6	7	8	9	10	11	12	13	14	15
H m	3.13	3.75	4.38	5	5.63	6.25	6.88	7.5	8.13	8.75	9.38
D m	max 9.5	11.4	13.3	15.2	17.1	19	20.9	22.8	24.7	26.6	28.5
	min 6	7.2	8.4	9.6	10.8	12	13.2	14.4	15.6	16.8	18.0
Lux Lumens per square metre	384	267	196	150	119	96	79	67	57	49	43

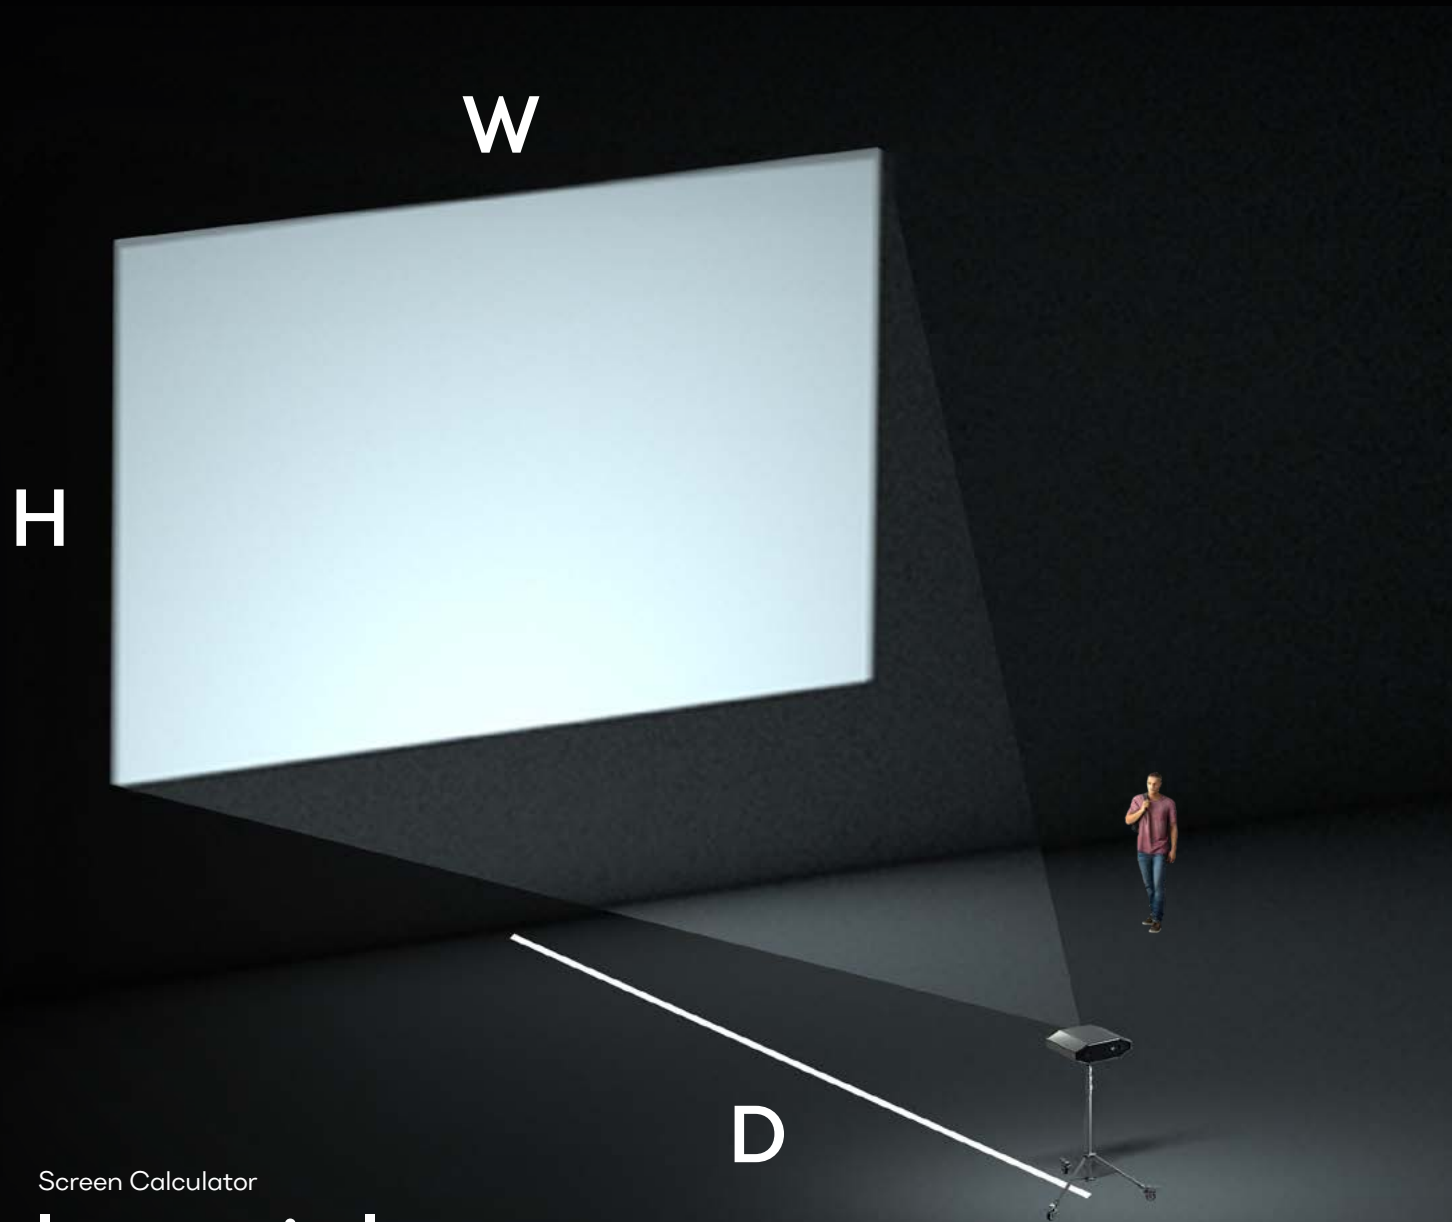

Screen Calculator

Imperial

W ft	16.4'	19.7'	23'	26.2'	29.5'	32.8'	36.1'	39.4'	42.7'	45.9'	49.2'
H ft	10.3'	12.3'	14.4'	16.4'	18.5'	20.5'	22.6'	24.6'	26.7'	28.7'	30.8'
D ft	max 31.2'	37.4'	43.6'	49.9'	56.1'	62.3'	68.6'	74.8'	81'	87.3'	93.5'
	min 19.7'	23.6'	27.6'	31.5'	35.4'	39.4'	43.3'	47.2'	51.2'	55.1'	59.1'
Lux Lumens per square metre	384	267	196	150	119	96	79	67	57	49	43




1:2 +


Multiprojection

You can link multiple L A Z R™ outdoor projectors to create a seamless outdoor projection screen of the desired size, shape, and brightness.


Overlay
Lux Increase +95 %



Simple Array
Size Increase +100 %
Visible Seam

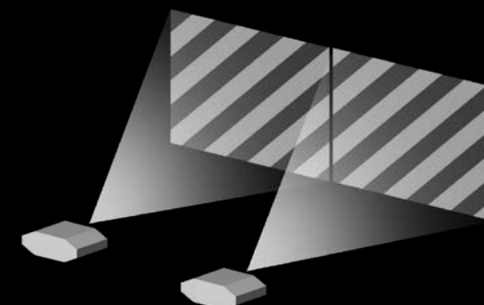

Soft Edge Blend
Size Increase +85%
Invisible Seam

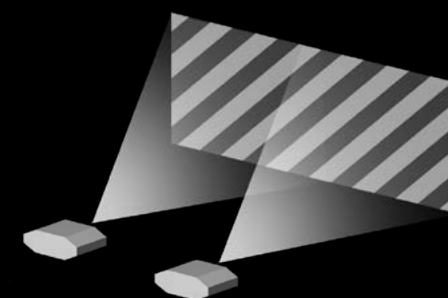



Inspiration from Ostrava
#cinema

Montforthaus in Feldkirch

#lightdesign






Art Museum
#immersive

National Heritage #history



L A Z R

INSTALLATION

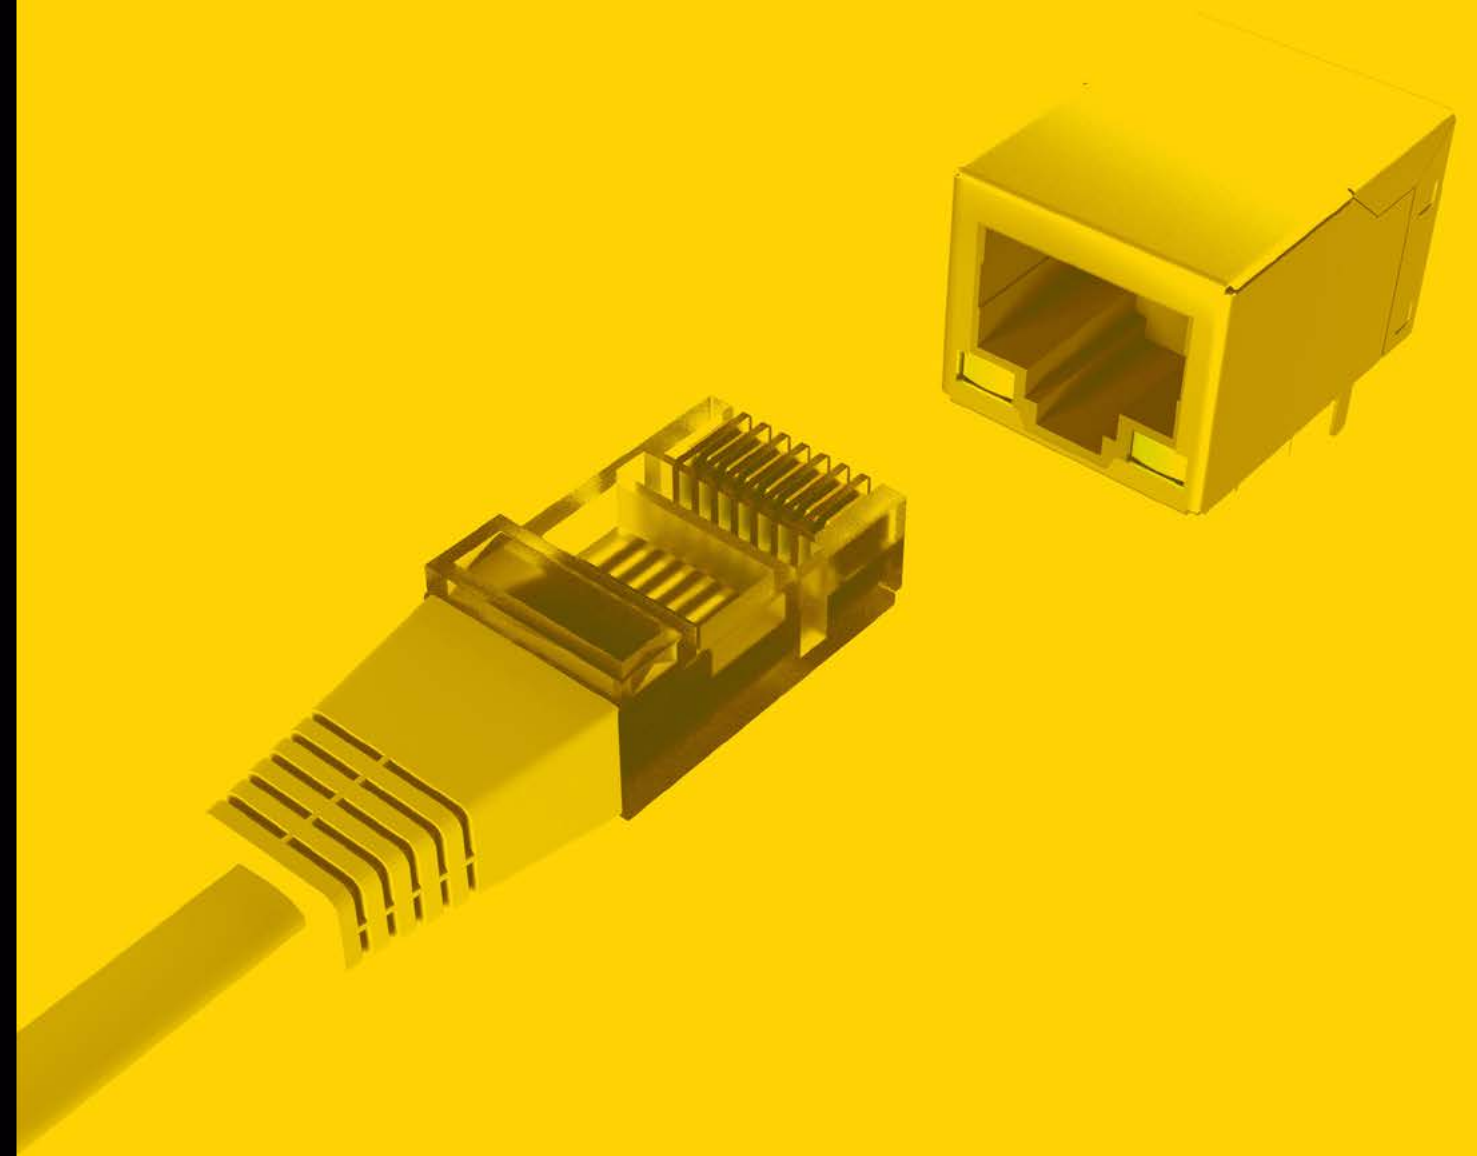

Recommended Set-Ups

We offer L A Z R™ Outdoor Projector in 2 configurations: The basic L A Z R™ is more affordable and compatible with well-known AV standards. On the other hand, the L A Z R 4G™ comes with a unique set of extra features, such as Remote Acces Web UI, Mapping Scanner, and Multiprojection Wizard*.

		
L A Z R	L A Z R 4G	
11 990	Price EUR MSRP EXW	17 990
●	HDMI	●
●	HDBaseT	
●	3rd Party Media Player Connectivity 5V - 12V - USB - LAN - HDMI	
	4G Wireless Internet	●
	Web UI Remote Access	●
	LM3X Mapping Player	●
	Mapping Scanner	●
	Multiprojection Wizard	●
	XLR Stereo Audio Out	●

model required for this set-up

L A Z R

Wi-Fi Screen Sharing

Simple, affordable, and very capable set-up for local wireless screen mirroring, photo sharing, presentations, movies, video stream, TV, music video, etc.

- *This set-up requires L A Z R™ accessories: Wi-Fi Plastic Shield
- *This set-up requires 3rd party accessories: Chromecast or similar device







chromecast

or a similar device




Power

110 - 230V ~ 550W

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.

HDMI Short Cable

Simple set-up compatible with a wide range of computers.
Use your PC or Mac, plug-in HDMI, and play.



Multiprojection and edge-blending are available via an external computer with multi-HDMI graphics output and with the use of 3rd party mapping software such as Madmapper, Resolume, Watchout, etc.

*This set-up requires an external media player



Power

110 - 230V ~ 550W


To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.



HDMI™

HDBaseT Long Cable

HDMI cables mentioned previously, are limited in length. In case the distance between the computer and the L A Z R™ projector exceeds 15 meters / 50 feet, we recommend using the HDBaseT Converter near your computer and convert the HDMI signal to an HDBaseT signal. The HDBaseT protocol allows for 100m / 330 ft cable length. (800 m / 2625 ft with 8x multi hops)



Multiprojection and edge-blending are available via external computer with multi-HDBaseT graphics output and with the use of 3rd party mapping software such as Madmapper, Resolume, Watchout, etc.

i: French company Videmus has presented a media server using Dataton WATCHOUT with six channels HDBaseT output integrated.

*This set-up requires an external media player



Power

110 - 230V ~ 550W

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.

HDBaseT



HDBaseT
Converter

HDMI



HDMI™

model required for this set-up

L A Z R

LIGHTFORM Mapping Kit

LIGHTFORM is the well-known projection-mapping tool from California. The LIGHTFORM LFC Kit can be easily integrated into the L A Z R™ outdoor projector and thus freely used outdoors. Local Wi-Fi or LAN control is available.

*This set-up recommended L A Z R™ accessories: Wi-Fi Plastic Shield

*This set-up requires 3rd party media player: LIGHTFORM LFC

#events

#light design



Wi-Fi

LIGHTFORM



Power

110 - 230V ~ 550W

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.

LAN optional

model required for this set-up

L A Z R


miniMAD by Madmapper

Videomapping pioneers from Switzerland brought to the world the very affordable and quite capable Raspberry Pi based mapping player called miniMAD. It works smoothly with their state-of-the-art Mad Mapper video-mapping software. miniMAD uses a plug-in SD card for media storage.

*This set-up requires 3rd party media player: miniMAD by Madmapper

#events

#light design



Affordable miniMAD includes multiprojection support. The manufacturer warns, that the miniMAD multiprojection is not precisely frame to frame synchronized and that if using fast image transitions minor lag between screens might be noticeable. Cable LAN connection required for miniMAD multiprojection.



map



Power

110 - 230V ~ 550W

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.

LAN optional

4G Wireless Remote Mapping

You can access your L A Z R 4G™ all over the planet and control the projected media in real-time. This set-up enables Full Remote Management and support services.

2-Channel Internet Connection available for improved reliability (Wired and/or 4G Wireless), at least 1 Channel Unrestricted Internet required for system operation.

L A Z R 4G™ Features

- PLAY / STOP / SCHEDULE Simple Mapping Player
- Mapping Scanner
- Mapping Tools
- Remote UI Media Upload & Management
- Remote UI Calendar & Clock for Playback Scheduling



Control device (PC, Mac, Android, iOS)
Internet access and Chrome browser required to access L A Z R 4 G UI



Wireless Internet



Power

110 - 230V ~ 550W

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.



Wired Internet optional
DHCP, unrestricted

Multiprojection Mapping



You can link multiple L A Z R 4G™ projectors to create a seamless outdoor projection-mapping screen of the desired size, shape and brightness. Comes with a simple PLAY / STOP / SCHEDULE functionality.

2-Channel Internet Connection available for improved reliability (Wired and/or 4G Wireless), at least 1 Channel Unrestricted Internet required for system operation.

L A Z R 4G™ Multiprojection Features

- Network Video Frame Synchronization
- Edge Blending
- Multiprojection Wizard* (*April 2021 Update)

*This setup requires LM3X Image Synchronization Router




Control device (PC, Mac, Android, iOS)
Internet access and Chrome browser required to access L A Z R 4 G UI



Wireless Internet



Wireless Internet

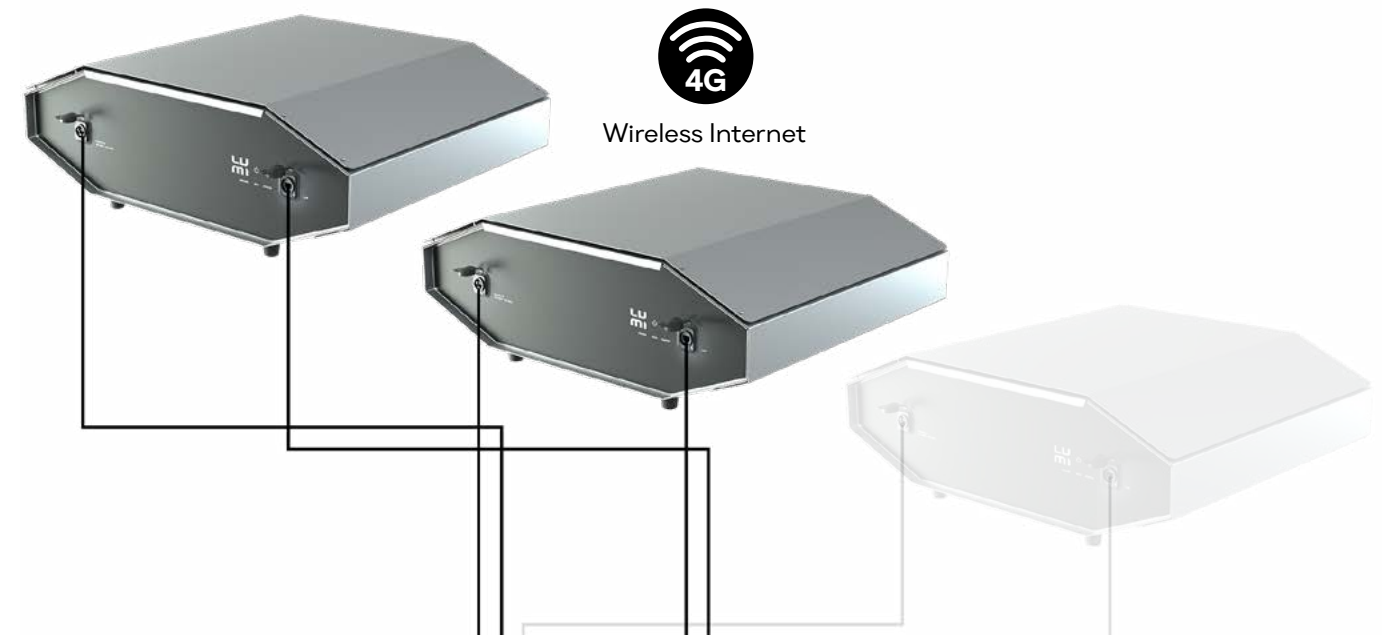

Power

110 - 230V ~ 550W per projector

To preserve outdoor ingress protection, use original NEUTRIK IP65 connectors.



LAN

LM3X Image Synchronization Router



Wired Internet optional
DHCP, unrestricted


L A Z R

ACCESSORIES



Urban Mast

Slim & robust design for hi-end locations.
Single Urban Mast can carry up to 12 L A Z R™ units.

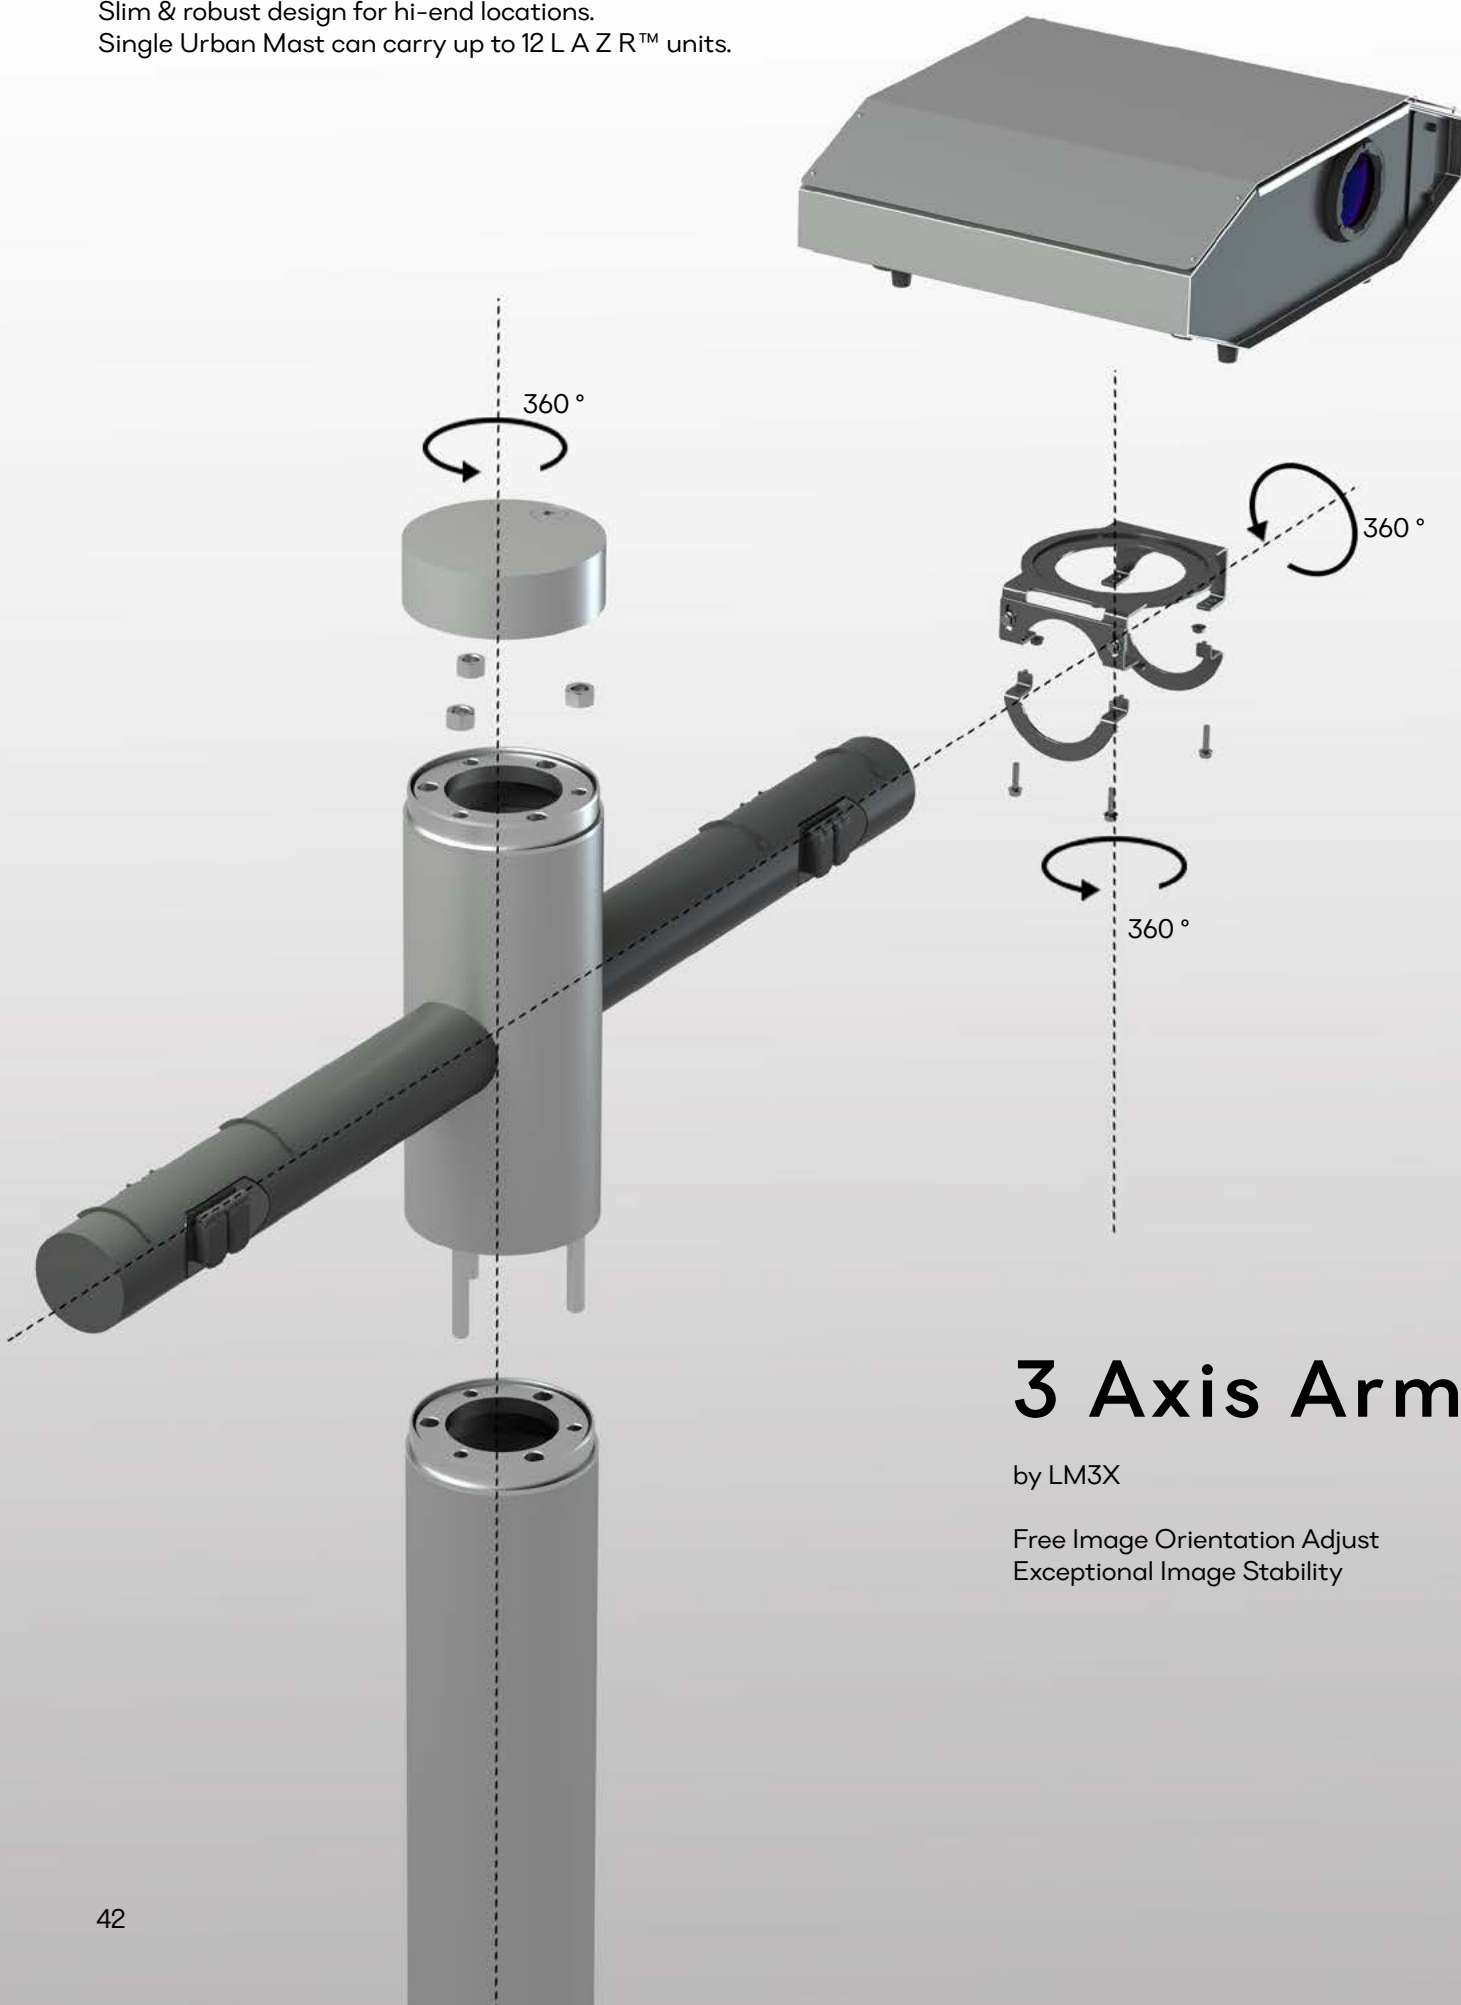

3 Axis Arm

by LM3X

Free Image Orientation Adjust
Exceptional Image Stability



Portrait mode




Landscape mode

Warning: Default L A Z R™ shield enables Landscape image mode only. For Portrait mode, use equipment: Portrait Mode Shield



Wall/Post Fixture

Compact and versatile fixture
for a wide range of use

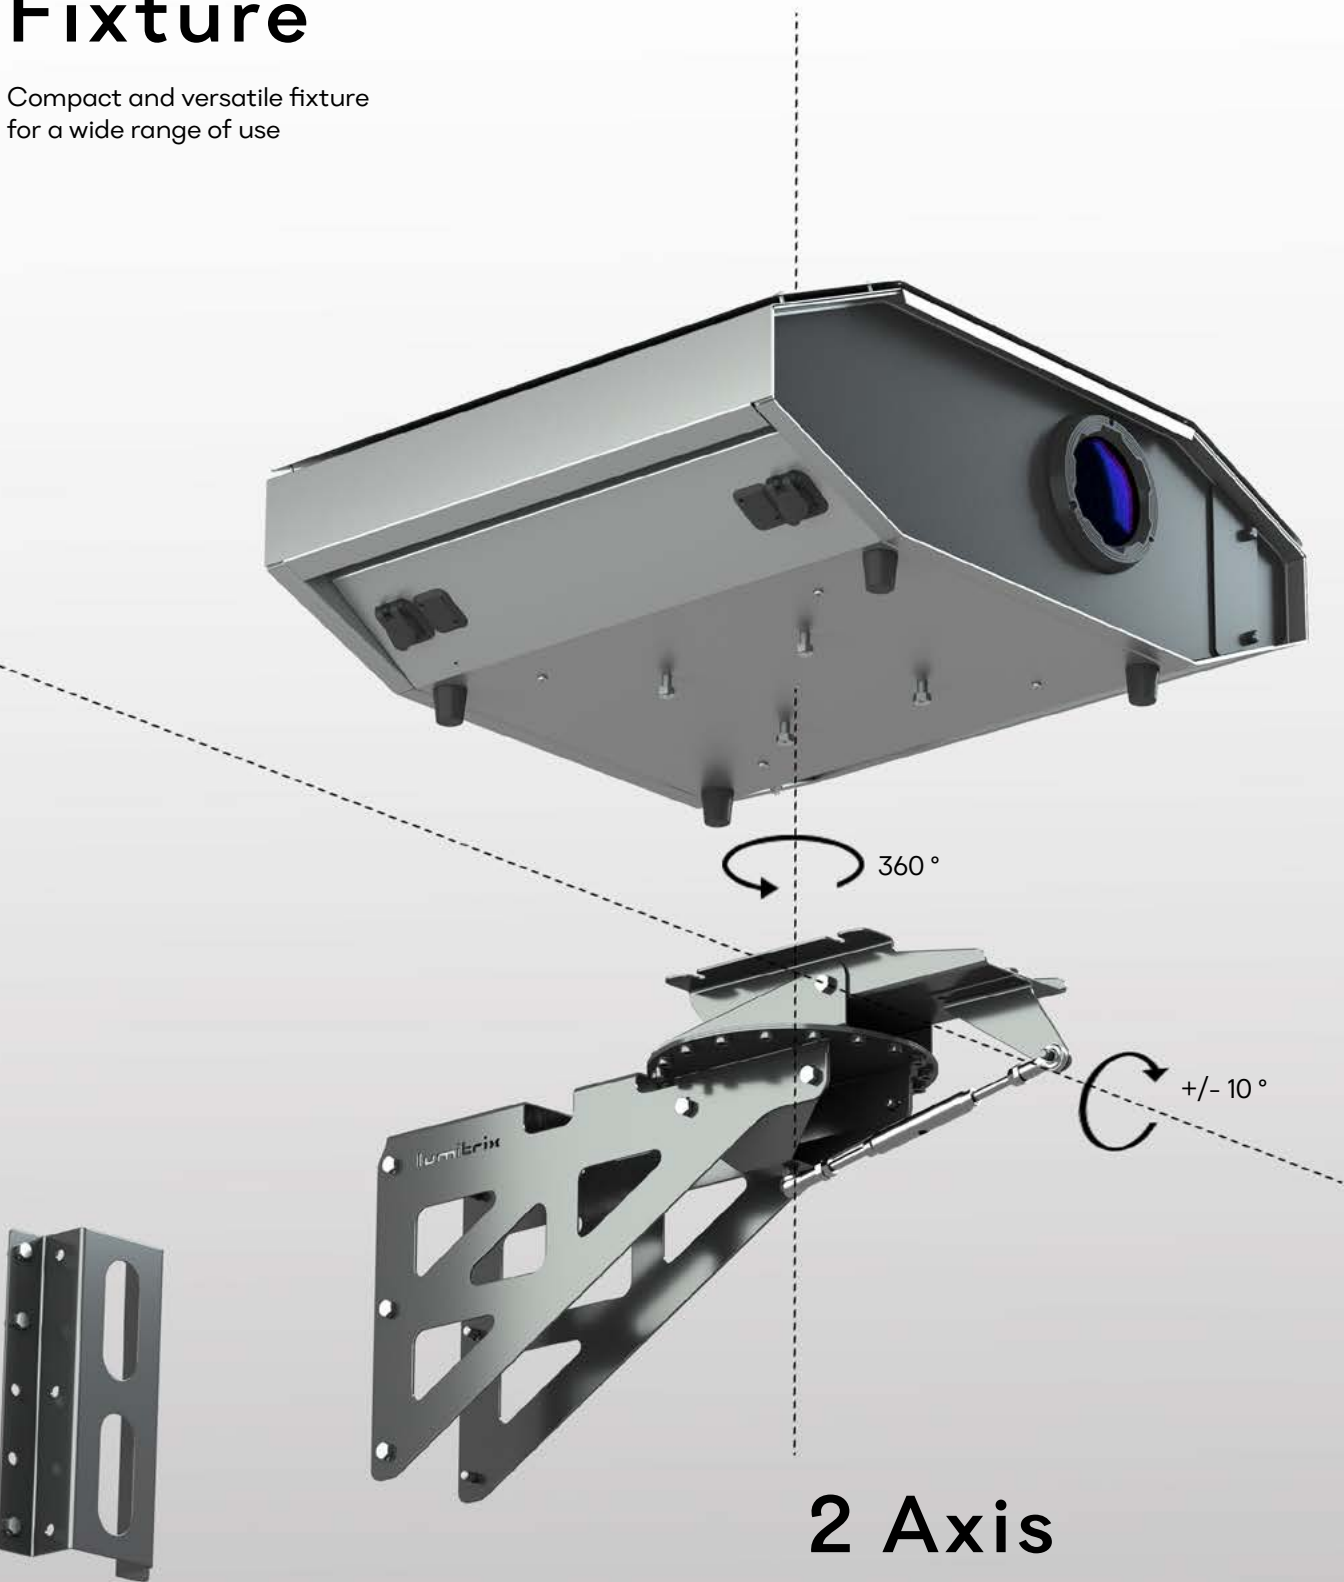

2 Axis

Image Orientation Adjustment
Landscape mode only




Landscape
mode

Wall/Post Fixture



Landscape
mode

360 Fixture

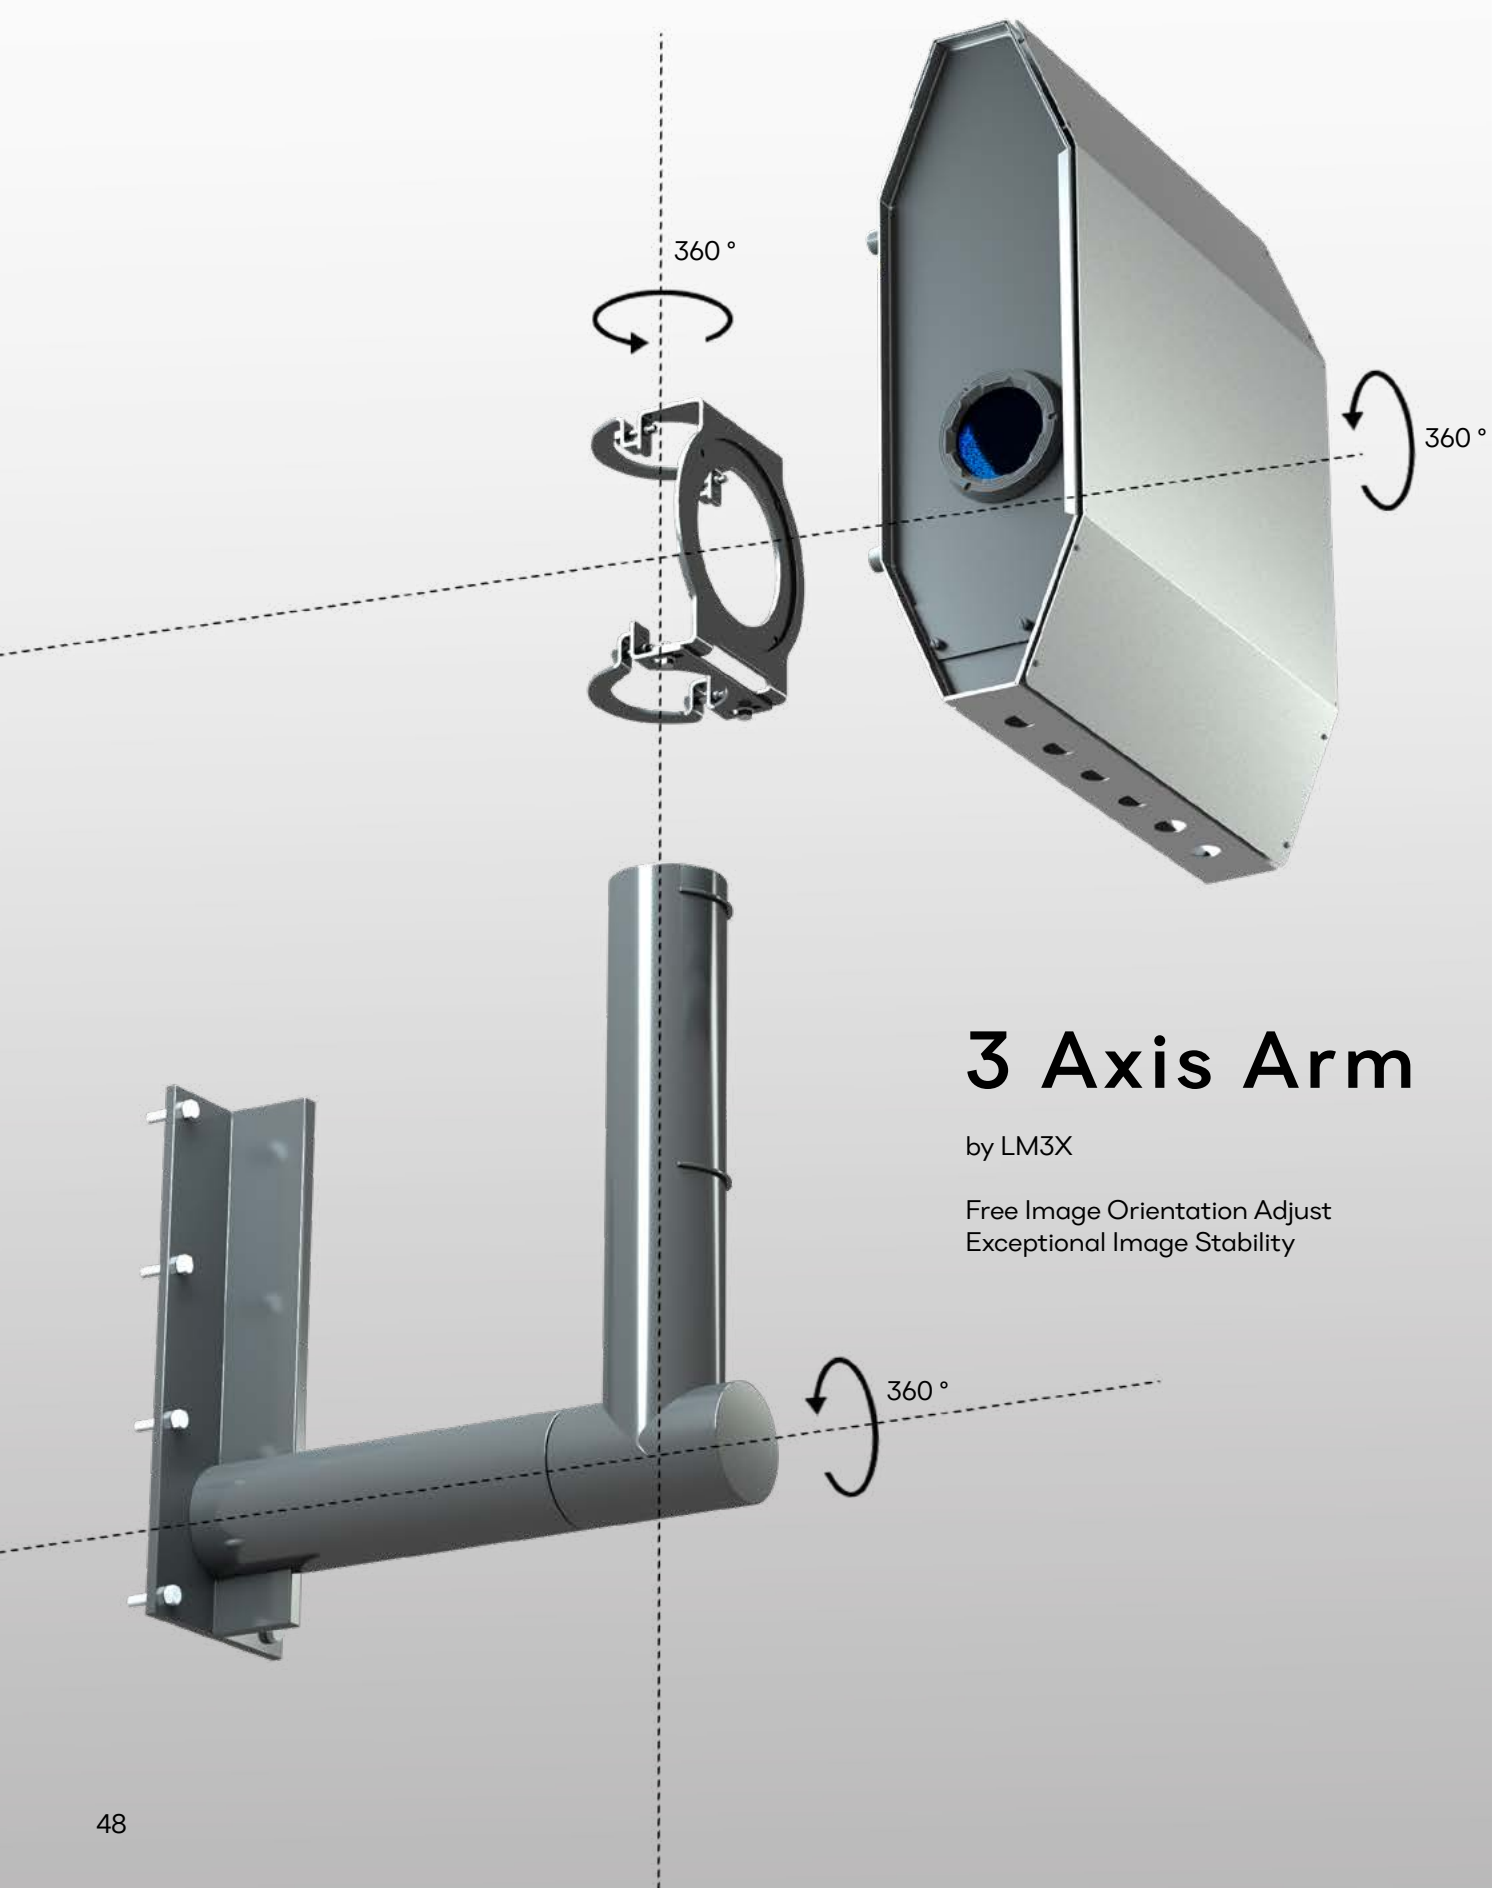

3 Axis Arm

by LM3X
Free Image Orientation Adjust
Exceptional Image Stability



Portrait mode




Landscape mode

Warning: Default L A Z R™ shield enables Landscape image mode only. For Portrait mode, use equipment: Portrait Mode Shield


Tripod Eventor

Compact and versatile chassis for events

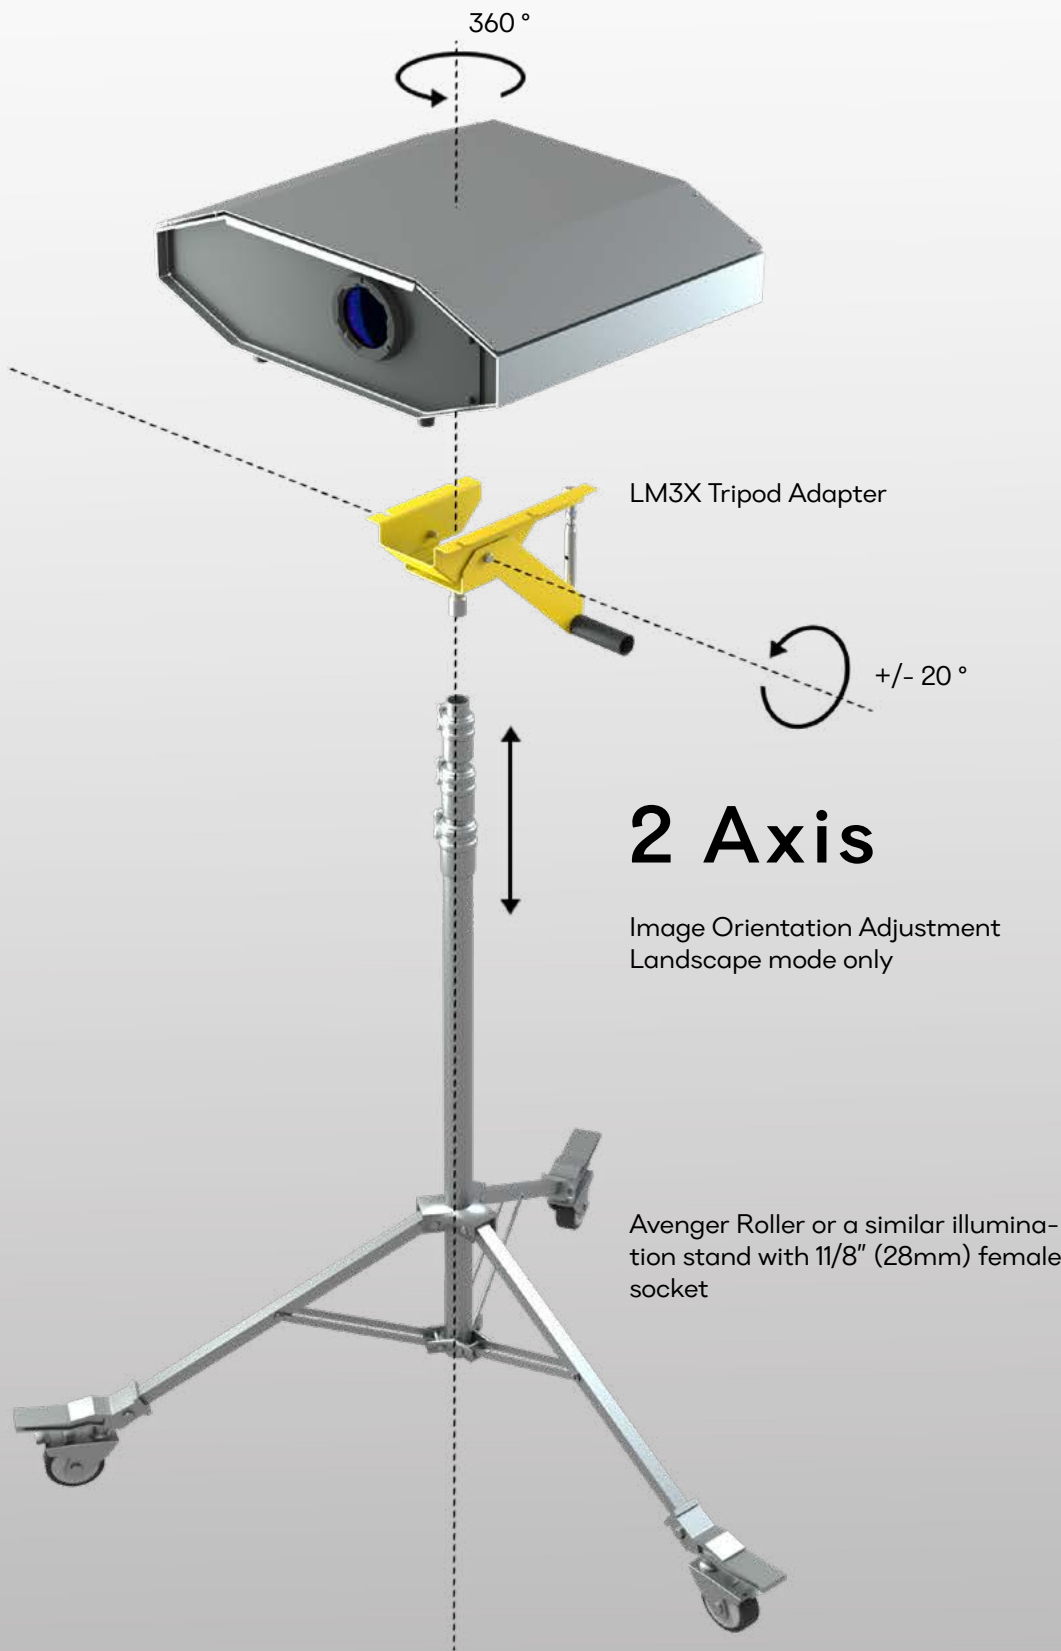

L A Z R

PRICELIST

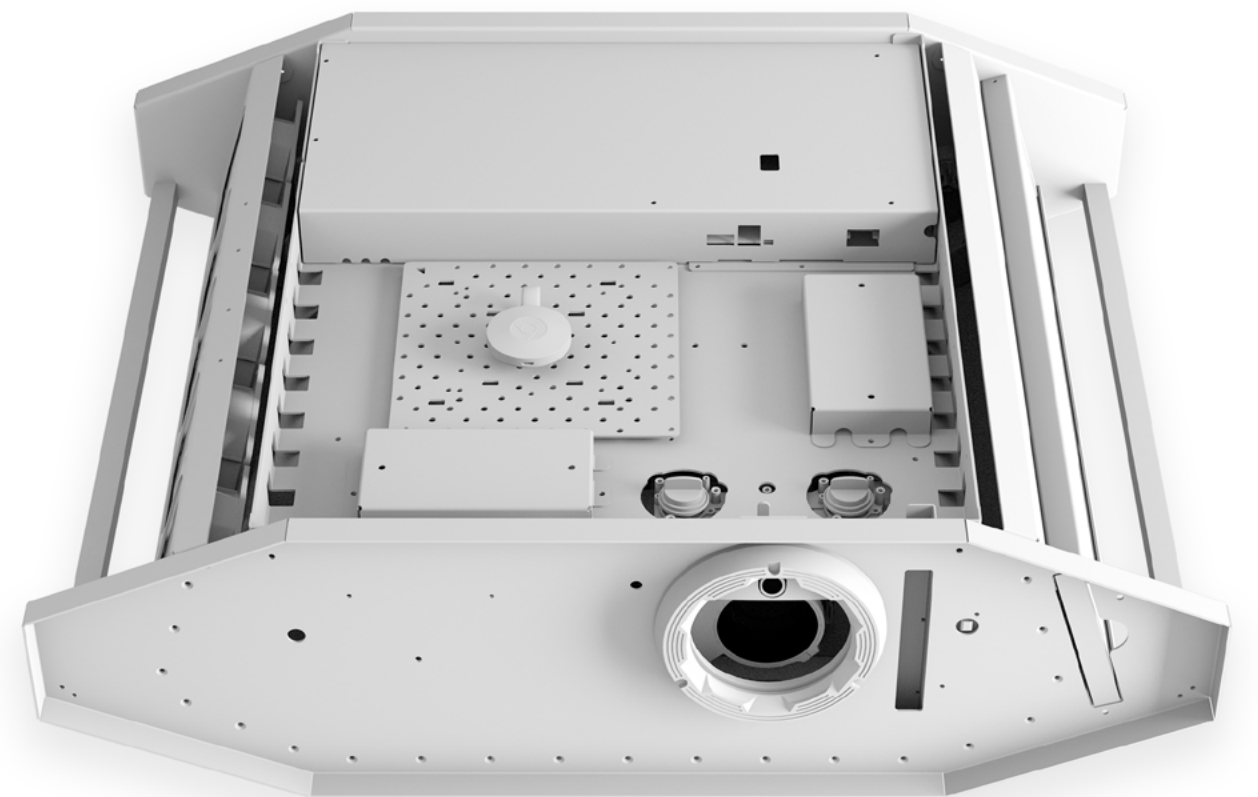

L A Z R

€11 990

Shipping and tax not included



L A Z R™ Outdoor video Projector HDMI HDBaseT
Landscape mode

24 kg
HS 852 869 80 90



L A Z R 4G

€17 990

Shipping and tax not included



L A Z R 4G™ Outdoor video-mapping projector HDMI
Landscape mode

24kg
HS 852 869 80 90



€3 600

Shipping and tax not included



Urban Mast X-part

35 kg

Type A €3 600

Type B €4 800

Shipping and tax not included



Urban Mast
Main Columnn

Type A max 6 projectors
Type B max 12 projectors

Type A 110 kg
Type B 235 kg

€360

Shipping and tax not included



Aluminium Shield

Portrait mode only
3 kg



€360

Shipping and tax not included




Wi-Fi Plastic Shield

Landscape mode only
2 kg



€990

Shipping and tax not included

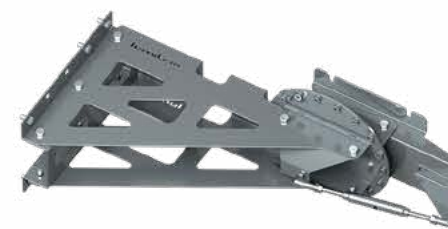

Wall / Post Fixture

12 kg
HS 852 990 92 57

€420

Shipping and tax not included



Tripod Adapter

fits in 1 1/8" (28mm) socket.
Use with [Avenger Roller](#) or similar.

2,38 kg
HS 852 990 92 57

€360

Shipping and tax not included



Wi-Fi Plastic Shield

Portrait mode only
2 kg



€1 990

Shipping and tax not included



360 Fixture

35 kg
HS 852 990 92 57

Price offer valid until Q2 2022

€99

Shipping and tax not included



Air filter pack (10 pcs)

0,102 kg
HS 540 490 90 90

€199

Shipping and tax not included



LM3X Image Synchronization Router

0,7 kg
HS 851 762 00 00

Price offer valid until Q2 2022
55

Cellular network

T4 L A Z R 4G™ is made with two types of cellular network receiver.
The type of modem used in your device is indicated on the side of the device.

If you use your device in a different location than what your machine is configured for, you may experience problems connecting your device using the cellular network.

CELLULAR NETWORK - E:

Variant for EMEA/Brazil/APAC

- LTE-FDD: B1/B3/B5/B7/B8/B20/B28/B32
- LTE-TDD: B38/B40/B41
- 2×CA: B1+B1/B5/B8/B20/B28; B3+B3/B5/B7/B8/B20/B28; B7+B5/B7/B8/B20/B28; B20+B32; B38+B38; B40+B40; B41+B41
- WCDMA: B1/B3/B5/B8

CELLULAR NETWORK - A:

Variant for America/Canada/Mexico/Argentina

- LTE-FDD: B2/B4/B5/B7/B12/B13/B25/B26/B29/B30/B66
- 2×CA: B2+B2/B5/B12/B13/B26/B29; B4+B4/B5/B12/B13/B26/B29; B7+B5/B7/B12/B13/B26/B29; B25+B5/B12/B13/B25/B26/B29; B30+B5/B12/B13/B26/B29; B66+B5/B12/B13/B26/B29/B66
- WCDMA: B2/B4/B5

Declaration of Conformity

Hereby declare that:
Product: OUTDOOR PROJECTOR
Product family: T
Machine Type: T4



Is compliant with the essential requirements and any other relevant provisions of the following EC directives, and that all the necessary steps have been taken and are in force to assure that the production units of the same product will continue to comply with the above specified requirements.

ELECTRICAL SAFETY TEST

The following regulations have been used:
EN 62368-1:2014 + AC:2015-05 + A11:2017

ELECTROMAGNETIC COMPATIBILITY TEST

The following regulations have been used:

- EN 55024:2010
- EN 55032:2015
- EN 61000-3-2:2014
- EN 61000-3-3:2013
- EN 61000-4-2:2008
- EN 61000-4-3:2006 +A1:2007 +A2:2010
- EN 61000-4-4:2012
- EN 61000-4-5:2014
- EN 61000-4-6:2014
- EN 61000-4-11:2004,

Declaration of RoHS2 Compliance

Product: OUTDOOR PROJECTOR
Trade Name: LUMITRIX
Machine Type: T4



This product has been designed and manufactured in compliance with Directive 2011/65/EU of the European Parliament and the Council on restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS2 Directive) and is deemed to comply with the maximum concentration values issued by the European Technical Adaptation Committee (TAC) as shown below:

Substance	Proposed Maximum Concentration	Actual Concentration
Lead (Pb)	0.1%	< 0.1%
Mercury (Hg)	0.1%	< 0.1%
Cadmium (Cd)	0.01%	< 0.01%
Hexavalent Chromium (Cr6+)	0.1%	< 0.1%
Polybrominated biphenyls (PBB)	0.1%	< 0.1%
Polybrominated diphenyl ethers (PBDE)	0.1%	< 0.1%

Certain components of products as stated above are exempted under the Annex III of the RoHS2 Directives as noted below:

Examples of exempted components are:

1. Mercury in cold cathode fluorescent lamps and external electrode fluorescent lamps (CCFL and EEFL) for special purposes not exceeding (per lamp):
(1) Short length (= <500 mm): maximum 3.5 mg per lamp.
(2) Medium length (>500 mm and =<1,500 mm): maximum 5 mg per lamp.
(3) Long length (>1,500 mm): maximum 13 mg per lamp.
2. Lead in glass of cathode ray tubes.
3. Lead in glass of fluorescent tubes not exceeding 0.2% by weight.
4. Lead as an alloying element in aluminium containing up to 0.4% lead by weight.
5. Copper alloy containing up to 4% lead by weight.
6. Lead in high melting temperature type solders (i.e. lead-based alloys containing 85% by weight or more lead).
7. Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound.

