

Christie MIRAGE DS+6K-M

CHRISTIE MIRAGE DS+6K-M



With the MIRAGE DS+6K-M, manufacturer Christie offers a DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 10000:1. The integrated lens shift gives freedom when positioning the projector. 6300 Ansi lumens ensure that a picture width of 691 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 461 cm. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 3D are also no problem for the projector. The model was built by Christie in 2008 and is no longer current.



3 x 0,95" DLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Projector 6300

10000:1 full on/off

0,6300 min. Lumen

Vert.: +/-50% Hori.: +/-25% motorisch

SXGA+ 1400 x 1050

1.470.000 Pixel

QXGA 2048 x 1536 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 200W P-VIP Lamp

2000 h. 3000 h. in Eco Mode

-

Powered

Powered

optional

optional

Nein

5 x BNC RGBHV in

DVI-I in

RS232C RS422C


weitere Anschlüsse Optional

Yes, is possible.

Screen 2100 Lux (bei 200 cm Screen)

10000:1 full on/off

0,21 min. Lumen

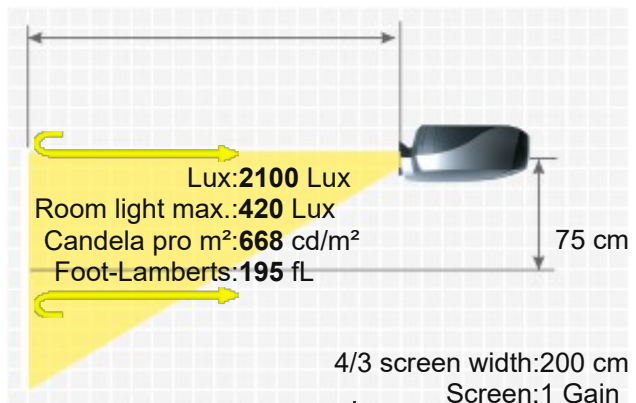


Power870W
Size WxHxD500 x 259 x 561 mm (19,7"x10,2"x22,1") 72,65 L/dm³
Operating Noise-

Weight25,00 kg / 55,12 lbs.
Keystone-
Illumination90%
H-sync: 15-120 kHz
V-sync: 23,97-150 Hz
Range max.: 165 MHz
Foot-Lamberts195 fL / max. 691 cm screen width
668 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Digital image shift
- Warping
- 24/7 continuous operation capable
- Edge Blending
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- Lan network compatible.
- Creston®-Software compatible.

Screen Mirroring-

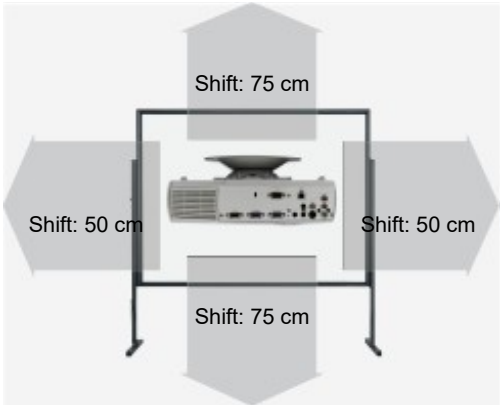

Optional accessories

 Deckenhalterung Länge 225 mm Halterung45 85,80 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
7.5-11.2:1	7.5-11.2:1	15-22.4 m	+/-50%	+/-25%	Powered
4.5-7.5:1	4.5-7.5:1	9-15 m	+/-50%	+/-25%	Powered
2.8-4.5:1	2.8-4.5:1	5.6-9 m	+/-50%	+/-25%	Powered
2.0-2.8:1	2-2.8:1	4-5.6 m	+/-50%	+/-25%	Powered
1.5-2.0:1	1.5-2:1	3-4 m	+/-50%	+/-25%	Powered
1.25-1.6:1	1.25-1.6:1	2.5-3.2 m	+/-50%	+/-25%	Powered
Fix Optional Lenses					
1.2:1	1.25:1	2.5 m	+/-50%	+/-25%	No Zoom
0.73:1	0.73:1	1.5 m	+/-20%	+/-10%	No Zoom

Status2008 Discontinued (EOL) // Last update of the data: 2025-03-03



More Details



HCinema
<https://www.projector-database.com/pro/christiemiragedsplus6km-en.html>