

CineVersum CV30 UST-HD



Brief Introduction

Beta 2.5

The CV30 UST-HD DLP projector from CineVersum has 4000 Ansi-Lumen, a contrast of 20000:1 and a HDTV 1920 x 1080 resolution. The integrated media player allows files to be played directly. This projector has a projection ratio of just 0.25:1. For a 2 m wide image, the projector only needs to be 50 cm away from the screen. The model was built by CineVersum in 2015 and is no longer current.



1 x 0,65 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

4000
20000:1 full on/off
0,2000 min. Lumen
1778 Lux (bei 200 cm Screen)
20000:1 full on/off
0,089 min. Lumen

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Disc Recognition

Media player formats: Word, Excel, Powerpoint, PDF, AVI, MKV, MP4, MP3, JPG

Application

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Light Source

Short Distance | Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

Laser

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,25:1

Audio

1 x 10W

Connections

2 x HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power

335 / 225W in Eco Mode

Size WxHxD

-

Operating Noise

33 / 30 dB in Eco Mode

Weight


7,00 kg / 15,43 lbs.

Keystone

-

Illumination

-

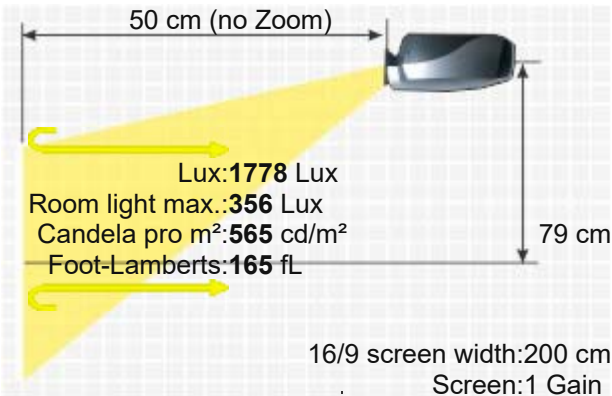

Frequenz	-
Foot-Lamberts	165 fL / max. 643 cm screen width
	565 cd/m²
Features	■ Integrated Mediaplayer ■ Eco Mode ■ Kensington Slot ■ Optional Wi-Fi network compatible. ■ Lan network compatible. ■ Short-throw projector
Status	2015 Discontinued (EOL) // Last update of the data: 2024-08-21



More Details



HCinema

<https://www.projector-database.com/pro/cineversumcv30-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.