

Dell 1210S

DELL 1210S



Brief Introduction

Beta 2.5

The Dell 1210S BrilliantColor DLP projector has 2500 Ansi lumens, a contrast of 2200:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 435 cm thanks to the 2500 Ansi lumens. In room lighting, however, the image width should ideally be less than 290 cm. Even 1080P video signals are no problem for the projector. The model was built by Dell in 2009 and is no longer current.

Display Type

1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2500

833 Lux (bei 200 cm Screen)

Contrast

2200:1 full on/off

2200:1 full on/off

Black Level

1,1364 min. Lumen

0,379 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

-
Articel Nr.: 725-10193

Light Life

3000 h. 4000 in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,41-2,55 f=21,8-24,0 mm

Throw Ratio

1,95-2,15:1

Audio

2W

Connections

2 x D-sub 15 pin in 1 x out
S-Video in
Cinch video in
USB in
Mini Jack Audio in und out



Ceiling Mounting


Yes

Power

234 / 209W in Eco Mode

Size WxHxD

286 x 90 x 192 mm (11,3"x3,5"x7,6") 4,94 L/dm³

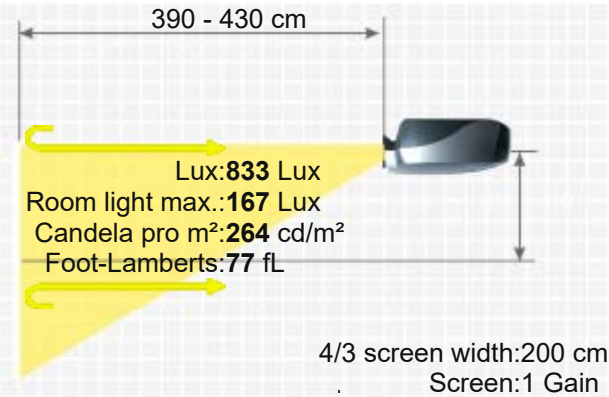

Operating Noise

-

Weight
Keystone
Illumination

2,40 kg / 5,29 lbs.
Vert. +40°-35°
90%

Frequenz

-

Foot-Lamberts

77 fL / max. 435 cm screen width
264 cd/m²

- Full HD 1080P compatible
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- BrilliantColor™

Features

- | | |
|---------------------------|---|
| Osram bulb only | NLMP19441 |
| Lamp ruby | Ruby-LMP19441 |
| Lamp original | 725-10193 / 317-2531 / 4YNTF |
| Compatible lamp | LMP-K19441 |
| Universal Remote original | Fernb-uni-V3 |
| Remote control original | 725-10113, 412-1057, 412-1065, JU126, TSHR-IR01 |
| Ceiling Mount 100-120 | Halterung100 |

Optional

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19441>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Status

Data



More Details



HCinema

<https://www.projector-database.com/pro/dell1210s-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

