


Digital Projection TITAN sx+ Quad 2000 3D



Brief Introduction

Beta 2.5

The Digital Projection model TITAN sx+ Quad 2000 3D is a DLP projector with SXGA+ 1400 x 1050 resolution and a contrast of 2000:1. The built-in lens shift function provides freedom when setting up. Thanks to the brightness of 20000 Ansi lumens, an image width of 1232 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 821 cm). If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. The model is also Full HD 1080P and 3D compatible. The model was built by Digital Projection in 2013 and is no longer current, but is still very popular in our projector database.



3 x 0,95" 12 GradDLP Chip
SXGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

20000

6667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

10,0000 min. Lumen

3,339 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +25% -17%

Resolution

SXGA+ 1400 x 1050

1.470.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

4 x 450W Lamp

Article Nr.: 113-105

Light Life

1500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

DVI-D in
SDI in
HDMI 1.4 in
D-sub 15pin in
5 x BNC RGBHV in
4 x BNC YUV in
S-Video in
RJ45
RS232C

Ceiling Mounting

Yes, is possible.

Power

2300W

Size WxHxD


540 x 258 x 620 mm (21,3"x10,2"x24,4") 86,38 L/dm³

Operating Noise


48dB

Weight

39,00 kg / 85,98 lbs.

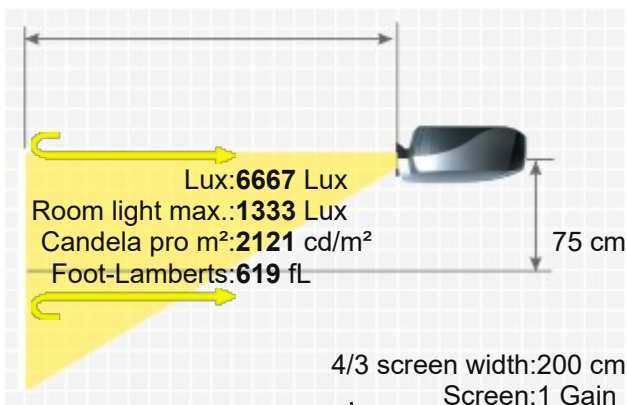

Keystone	-
Illumination	87%
Frequenz	H-sync: 15-100 kHz V-sync: 24-85 Hz
Foot-Lamberts	619 fL / max. 1232 cm screen width 2121 cd/m²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Freeze
	■ Eco Mode
	■ Gamma correction
	■ Edge Blending
	■ Picture-in-Picture
	■ Password protection
	■ Wi-Fi network compatible.
Screen Mirroring	■ Lan network compatible.
	■ Auflösung im Prospekt s'timmt nicht.
Please note	-
	Resolution in the brochure is not correct.

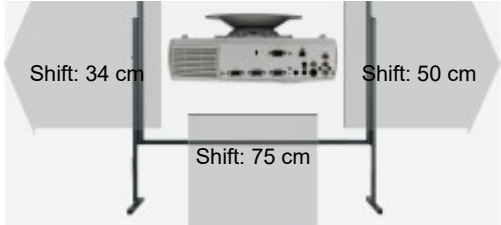

Optional accessories

	Deckenhalterung	HeavyDuty	378,28 €
--	-----------------	-----------	----------

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
109-236 / 109-359	1.16-1.49:1	2.3-3 m	+/-50%	+/-18%	Powered
105-613 / 107-198	4.51-7:1	9-14 m	50-40%	+/-20%	Powered
105-612 / 107-198	2.77-4.5:1	5.5-9 m	50-40%	+/-20%	Powered
105-611 / 107-197	2.02-2.77:1	4-5.5 m	50-40%	+/-20%	Powered
105-610 / 107-196	1.5-2.02:1	3-4 m	50-40%	+/-20%	Powered
Fix Optional Lenses					
105-609 / 105-609 (short)	1.2:1	2.4 m	50-40%	+/-20%	No Zoom
105-608 / 105-608	1.2:1	2.4 m	50-40%	+/-20%	No Zoom
105-607 / 107-195	0.73:1	1.5 m	+/-11%	+/-7%	No Zoom

Status 2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2013-01-22 15:05:57

Data

More Details



HCinema

<https://www.projector-database.com/pro/digitalprojectiontitansxplusquad20003d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.

QUAD 2000 3D