

Eiki EK-102X

EAN/UPC:4571194677850



Brief Introduction

Beta 2.5

A brief introduction to the EK-102X: The Eiki standard portable LCD projector offers 3300 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The lamp life is up to 10000 hours, which is over 13.7 years if enjoyed for two hours every day. The horizontal and vertical keystone correction provides leeway when setting up. A picture width of up to 500 cm is possible. However, the picture should be smaller in room light. We recommend max. 333 cm. Playing 1080P is also no problem for the projector. The model was built by Eiki in 2016 and is no longer current.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

3300

1100 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,3300 min. Lumen

0,11 min. Lumen

Offset

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

218W UHP Lamp

Articel Nr.: 23040052 / 2204000

Light Life

4000 h. 10000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,76 f=19,1-23,0 mm

Throw Ratio

1,48-1,78:1

Audio

10W Mono

Connections

HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power

270W

Size WxHxD

347 x 109 x 259 mm (13,7"x4,3"x10,2") 9,8 L/dm³

Operating Noise

38,9 / 34,9 dB in Eco Mode


Weight

3,20 kg / 7,05 lbs.

Keystone


Vert.: +/-30°

Hori.: +/-15°

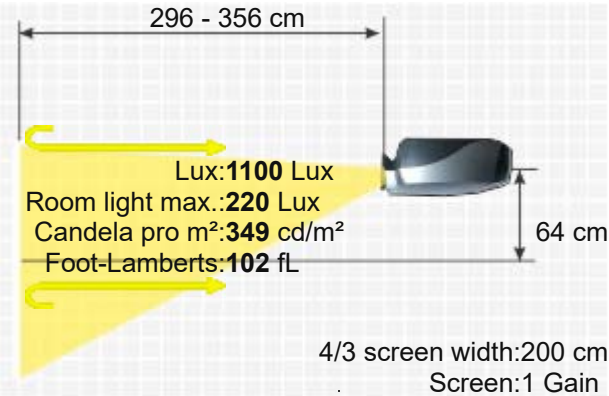

Key: 235 cm

EIKI EK-102X

Illumination	-		
Frequenz	H-sync: 15-100 kHz V-sync: 48-85 Hz Range max.: 160 MHz		
Foot-Lamberts	102 fL / max. 500 cm screen width 349 cd/m²		
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Lan network compatible.		
Optional	Remote control original		
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro9003345		
Data	2016 Discontinued (EOL) // Last update of the data: 2023-08-04		

More Details



HCinema

<https://www.projector-database.com/pro/eikiek102x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.