

Eiki LC WIP3000

EIKI LC WIP3000



The Eiki model LC WIP3000 is an LCD projector with WXGA 1280 x 800 resolution and a contrast of 500:1. An image width of up to 556 cm is possible as the projector has 3000 Ansi lumens. However, if room light is available, the image should be max. 371 cm wide. The projector is equipped with an integrated whiteboard function for interactive training and presentations. It is also Full HD 1080P compatible. The model was built by Eiki in 2011 and is no longer current, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type

3 x 0,59" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Ansi-Lumen

3000 1200 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off 500:1 full on/off

Black Level

6,0000 min. Lumen 2,412 min. Lumen

Offset

Resolution

WXGA 1280 x 800
1.024.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

245W UHP Lamp
Articel Nr.: 23040037

Light Life

2500 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=8,2mm

Throw Ratio

0,65:1

Audio

8W

Connections

HDMI
D-sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
RJ45 in
RS232C Din 9 pin in
USB Typ B

Ceiling Mounting


Yes

Power

310 / 235W in Eco Mode

Size WxHxD

360 x 132 x 348 mm (14,2"x5,2"x13,7") 16,54 L/dm³

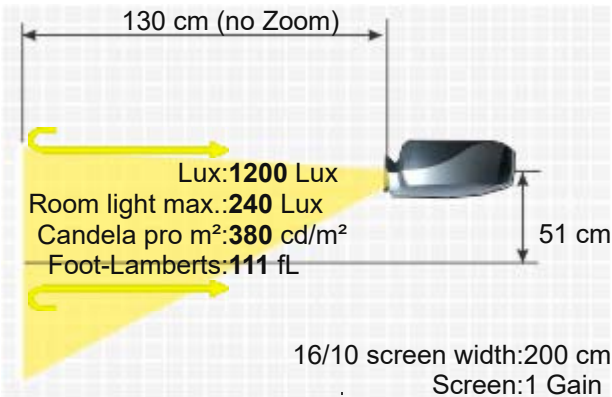

Operating Noise 33 / 28 dB in Eco Mode

Weight 4,10 kg / 9,04 lbs.
Keystone Vert.: +/-30°
Illumination 85%
H-sync: 31-92 kHz
Frequenz V-sync: 48-120 Hz
Range max.: 162 MHz
Foot-Lamberts 111 fL / max. 556 cm screen width
380 cd/m²

- Full HD 1080P compatible
- Blackboard Modus
- Eco Mode
- Kensington Slot
- Remote control with laser pointer und mouse control
- Lan network compatible.
- Short-throw projector
- Whiteboard function

Status 2011 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/eikilcwip3000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.