

Telex P2300

TELEX P2300



A brief introduction to the P2300: The Telex LCD projector offers 2700 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate an image width of 453 cm well. However, if room light is available, the image width should ideally not exceed 302 cm. The projector is no longer sold by the manufacturer. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type

1,3 psi TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2700

874 Lux (bei 203 cm Screen)

Contrast

200:1 full on/off

200:1 full on/off

Black Level

13,5000 min. Lumen

4.438 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC (auch 4,43), MPAL, NPAL

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

440W Metalldampf Lamp

Light Life

Article Nr.: P2300

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

-

Throw Ratio

-

Audio

2 x3W

Connections

Cinch Video in

Cinch Stereo in Ausgang

S-Video in

2 xD-sub 15pin in 1 xAusgang

VGA Ausgang

Serial Maus Control 9 Pin D-Sub

Ceiling Mounting


Yes

Power

380W

Size WxHxD

430 x 220 x 520 mm (16,9"x8,7"x20,5") 49,19 L/dm³

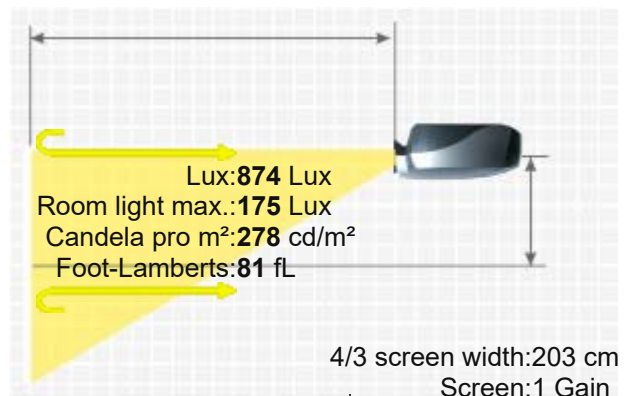

Operating Noise

-

Weight 16,00 kg / 35,27 lbs.

Keystone -

Illumination -

Frequenz H-sync: 15-94 kHz
V-sync: 50-90 Hz

Foot-Lamberts 81 fL / max. 453 cm screen width
278 cd/m²

■ Picture-in-Picture

■ Manual keystone correction +/- 14.3°, selectable colour temperature, interchangeable lenses available as accessories

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/Telexp2300-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.