

Epson EB 1771W



EPSON EB 1771W



Brief Introduction

Beta 2.5

The Epson model EB 1771W is an LCD projector with WXGA 1280 x 800 resolution and a contrast of 2000:1. The lamp in the projector is specified with a lamp life of 4000 hours, which is equivalent to over 5.5 years at 2 hours per day. Includes an integrated media player that can be used to play files directly. Built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 556 cm is possible. However, the image should be smaller in room light. We recommend max. 371 cm. The model is also Full HD 1080P compatible. The model was built by Epson in 2012 and is no longer current, but is still very popular in our projector database.

Display Type

3 x 0,59" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3000 / 1700 im Eco Mode 1200 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

Offset 1,5000 min. Lumen 0,601 min. Lumen

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: bmp, sit, gif, jpeg, png

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W UHE Lamp

Light Life

Articel Nr.: ELPLP65 / V13H010L65

4000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,58-1,7 f=13,52-16,22 mm

Throw Ratio

1,06-1,28:1

Audio

1W Mono

Connections

HD'MI in
D-sub 15 pin in
Cinch Video in
USB Typ A,B



Ceiling Mounting

-

Power

304 / 203W in Eco Mode

Size WxHxD

292 x 44 x 210 mm (11,5"x1,7"x8,3") 2,7 L/dm³

Operating Noise

40 / 30 dB in Eco Mode


Weight

1,68 kg / 3,7 lbs.

Keystone

Vert.: +/-30° automatisch

Hori.: +/-30°

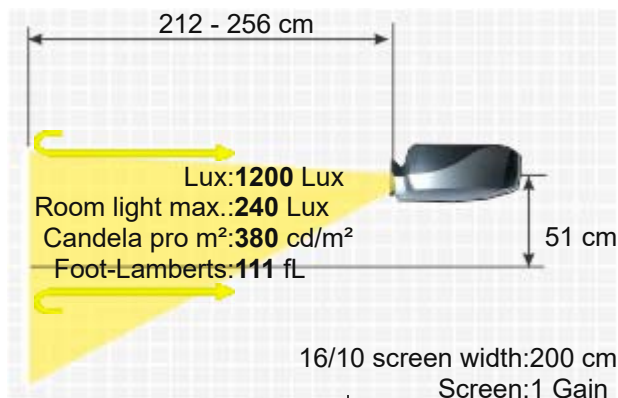

Illumination	-	
Frequenz	H-sync: 15-92 kHz V-sync: 50-117 Hz	
Foot-Lamberts	111 fL / max. 556 cm screen width 380 cd/m²	
Features	■ Full HD 1080P compatible ■ Integrated Mediaplayer ■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ sRGB ■ Password protection ■ Remote control with mouse control ■ Overscan adjustable ■	
Optional	Lamp original	ELPLP65 / V13H010L65
	Air filter original	ELPAF31 / V13H134A31 / 1542213
	Remote control original	1566090
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=21683 2012 Discontinued (EOL) // Last update of the data: 2023-09-20 Created: 2013-05-02 15:36:32	
Data		
More Details		 https://www.projector-database.com/pro/epsoneb1771w-en.html
Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.		