

Epson EB 585WS

EPSON EB 585WS



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The short-throw EB 585WS LCD has 3300 Ansi lumens, a contrast of 10000:1 and a WXGA 1280 x 800 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. This projector has a projection ratio of just 0.27:1. For a 2 m wide image, the projector needs to be just 54 cm away from the screen. The projector is equipped with a microphone jack plug and 16W speakers, so no additional speakers are required for presentations or training sessions. A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The model was built by Epson in 2016 and is no longer current.



3 x 0,59" LCD TFT Panel mit MLA

WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector

3300 / 1900 im Eco Mode

10000:1 full on/off

0,3300 min. Lumen

Screen

1320 Lux (200 cm Screen width)

10000:1 full on/off

0,132 min. Lumen

WXGA 1280 x 800

1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K-UHD Blu-ray

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

245W Lamp

Article Nr.: ELPLP80 / V13H010L80

4000 h. 6000 h. in Eco Mode

-

Manual

No Zoom

F=1,8 f=3,71mm

0,27:1

16W

2 x HDMI mit MHL in

2 x D-sub 15pin in und out

USB Typ A,B

RS232C Din 9 pin in

Mini Jack Audio in und out

RJ45 in


Mikrofon in

Yes, is possible.

258 / 270W in Eco Mode

367 x 155 x 375 mm (14,4"x6,1"x14,8") 21,33 L/dm³

35 / 28 dB in Eco Mode

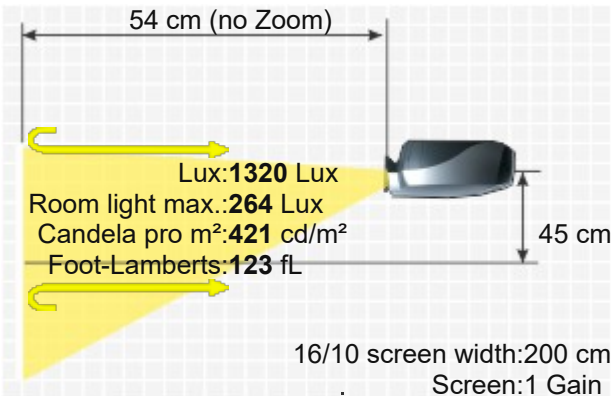

Weight 5,30 kg / 11,68 lbs.
Keystone Vert.: +/-3°
Illumination -

Frequenz - Key: -42 cm

Foot-Lamberts 123 fL / max. 584 cm screen width
421 cd/m²

Features

Screen Mirroring

- User logo
 - Eco Mode
 - Kensington Slot
 - Password protection
 - Wi-Fi network compatible.
 - Lan network compatible.
 - Short-throw projector
 - Digital zoom
- über HDMI MHL

Optional accessories

	Nackte Philips Lampe	NLMP25032	70,82 €
	Lampe Ruby	Ruby-LMP25032	84,18 €
	Lampe Original	ELPLP80 / V13H010L80	EOL €
	Kompatible Lampe	LMP-K22621	71,17 €
	Luftfilter Kompatibel	Alternative zu:ELPAF40 / V13H134A40	22,31 €
	Fernbedienung Original	1613717	30,05 €
	Luftfilter Original	ELPAF40 / V13H134A40	39,14 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2016 Discontinued (EOL) // Last update of the data: 2026-05-05
Data Created: 2016-10-04 11:05:28

More Details



HCinema

<https://www.projector-database.com/pro/epsoneb585ws-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.