

Epson EB G6770WU / NL

EPSON EB G6770WU / NL




The stationary Epson EB G6770WU / NL LCD projector has 6000 Ansi-Lumen, a contrast of 5000:1 and a WUXGA 1920 x 1200 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The integrated lens shift gives freedom when positioning the projector. An image width of up to 787 cm is possible, if the image width is smaller (we recommend max. 525 cm), rooms with residual light are also no problem. The model is also Full HD 1080P compatible and can therefore project Blu-rays even onto the ceiling thanks to 360° projection. The model was built by Epson in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 3 x 0,76" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Ansi-Lumen

Projector: 6000 / 4200 im Eco Mode
Screen: 2667 Lux (bei 200 cm Screen)

Contrast

Projector: 5000:1 full on/off
Screen: 5000:1 full on/off

Black Level

Projector: 1,2000 min. Lumen
Screen: 0,534 min. Lumen

Lens shift

Vert.: +/-67% Hori.: +/-30%

Resolution

WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: epsonebg6770wunl

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

380W UHE Lamp
Article Nr.: ELPLP76 / V13H010L76

Light Life

2000 h. 4000 h. in eco Mode

Operating Costs

4,88% / 0,16 €

Focus

Manual

Zoom

Manual 2,19

Objective

optional

Throw Ratio


optional

Audio

-


Connections

HDMI in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in

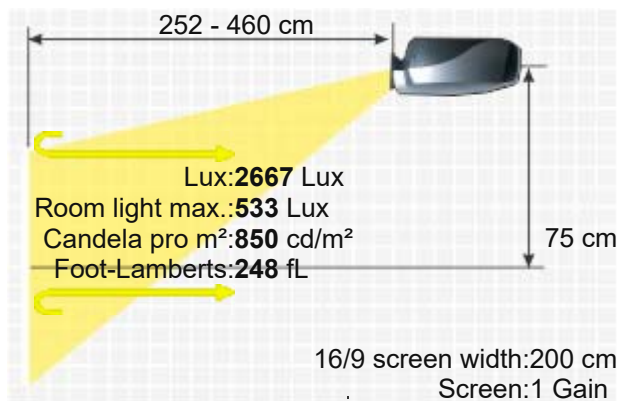

Cinch Stereo in
 Mini Jack Audio in und out
 RJ45 in
 HDBaseT in
 RS232C
 HD-SDI in

Ceiling Mounting Yes
 Power 528 / 421W in Eco Mode
 Size WxHxD 505 x 144 x 382 mm (19,9"x5,7"x15") 27,78 L/dm³
 Operating Noise 39 / 31 dB in Eco Mode

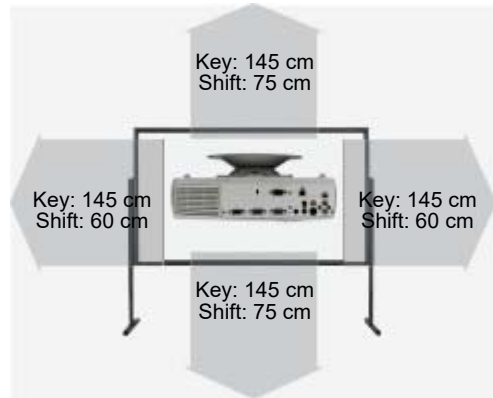

Weight 9,00 kg / 19,84 lbs.
 Keystone Vert.: +/-30°
 Hori.: +/-30°
 Illumination -
 Frequenz H-sync: 15-92 kHz
 V-sync: 50-85 Hz
 Range max.: 162 MHz
 Foot-Lamberts 248 fL / max. 787 cm screen width
 850 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- 360° installable
- Lan network compatible.
- Crestron®-Software compatible.
- DICOM Simulation
- HDBaseT

Features

Optionaler Zubehör

	Lampe Ruby	Ruby-LMP24958	166,64 €
	Lampe Original	ELPLP76 / V13H010L76	316,04 €
	Kompatible Lampe	LMP-K21795	112,98 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Objektiv Original	V12H004U01 / ELPLU01	EOL €
	Objektiv Original	ELPLL06 / V12H004L06	EOL €
	Objektiv Original	ELPLM04 / V12H004M04	EOL €
	Objektiv Original	ELPLM05 / V12H004M05	EOL €
	Objektiv Original	ELPLR03 / V12H004R03	EOL €
	Luftfilter Kompatibel	Alternative zu:ELPAF43 / V13H134A43 / 1588303	46,71 €
	Fernbedienung Original	1582799	75,27 €
	Luftfilter Original	ELPAF43 / V13H134A43 / 1588303	56,23 €
	Deckenhalterung 220	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
------	-------	----------	---------	---------	------

Zoom Optional Lenses

ELPLU01	0.67-0.8:1	1.3-1.6 m	+/-67%	+/-30%	Manual
ELPLS07	1.3-2.34:1	2.6-4.7 m	+/-67%	+/-30%	Manual
ELPLM05	3.51-5.32:1	7-10.6 m	+/-67%	+/-30%	Manual
ELPLM04	2.34-3.54:1	4.7-7.1 m	+/-67%	+/-30%	
ELPLL06	5.25-7.07:1	10.5-14.1 m	+/-67%	+/-30%	Manual

Fix Optional Lenses

ELPLR03	0.78:1	1.6 m	0.00% Fix	No Zoom
---------	--------	-------	-----------	---------

2015 Discontinued (EOL) // Last update of the data: 2024-11-08

Created: 2015-02-24 14:35:58

Status

Data

More Details



HCinema

<https://www.projector-database.com/pro/epsonebg6770wunl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.