

Epson EH-TW5825

EPSON EH-TW5825



The Epson EH-TW5825 3D LCD projector has 2700 Ansi lumens, a contrast of 70000:1 and an HDTV 1920 x 1080 resolution. The manufacturer specifies a lamp life of 4500 hours, which is over 6.2 years if enjoyed for two hours a day. The integrated media player allows files to be played directly. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. 528 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 352 cm. Thanks to the integrated Android TV software, it offers direct access to a variety of streaming services such as Netflix, Disney+, Amazon Prime Video and YouTube as well as games and other interactive content. The integrated Google Assistant extends the functionality of the projector with voice assistant features such as navigation, smart home integration and music streaming. The projector can also play 1080P and 3D without any problems. The model was built by Epson in 2022 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,61" LCD TFT Panel mit MLA

HDTV 16/9 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2700 / 1780 im Eco Mode

1200 Lux (bei 200 cm Screen)

Contrast

70000:1 full on/off

70000:1 full on/off

Black Level

0,0386 min. Lumen

0,017 min. Lumen

Lens shift

Vert.: +/-60%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

Media player formats: Android TV

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHE Lamp

Light Life

Articel Nr.: ELPAF54 / V13H134A54

4500 h. 7500 h. in Eco Mode

Operating Costs

2,74% / 0,02 €

Focus

Manual

Zoom


Manual 1,6

Objective

F=1,51-1,99 f=18,2-29,2 mm

Throw Ratio

1,33-2,0:1

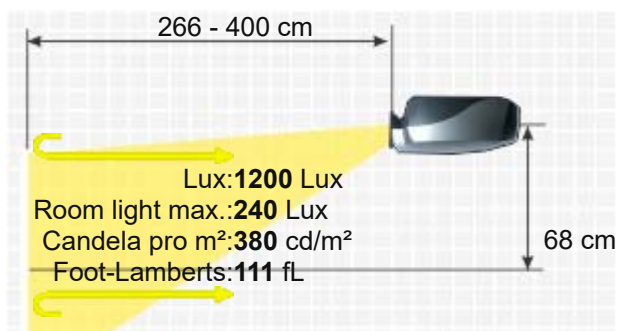

HDMI 1.4 in
Mini Jack Audio out
USB 2. Type B

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
297W / 227W in Eco Mode
309 x 122 x 315 mm (12,2"x4,8"x12,4") 11,87 L/dm³
36 / 28 dB in Eco Mode

Weight
Keystone
Illumination

3,80 kg / 8,38 lbs.
Vert.: +/-30° automatisch
Hori.: +/-30°
-

Frequenz

Foot-Lamberts

111 fL / max. 528 cm screen width
380 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Wi-Fi network compatible.
- Bluetooth
- Android TV
- Google Assistant
- YouTube button

Optional

Lamp original ELPLP96 / V13H010L96 / ELPLP97 / V13H010L97

Status

Air filter original ELPAF55 / V13H134A55

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=9002545>
2022 Discontinued (EOL) // Last update of the data: 2024-10-01
Created: 2022-02-25 10:15:56

Data



More Details



Hcinema

<https://www.projector-database.com/pro/epsonehtw5825-en.html>