

Epson EMP 1715

EPSON EMP 1715



The standard portable Epson EMP 1715 LCD projector has 2700 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector will be able to illuminate the 453 cm picture width well. However, if room light is available, the picture width should ideally not exceed 302 cm. The model was built by Epson in 2006 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2700 / 2100 im Eco Mode

900 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

6,7500 min. Lumen

2,267 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: bmp, sit, gif, jpeg, png, mog, mov, mrk

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

170W UHE (E-TORL) Lamp

Light Life

Articel Nr.: V13H010L38 ELPLP38

2000 h. 3000 h. in Eco Mode

Operating Costs

71,43% / 0,3 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,77 f=23,7-28,5 mm

Throw Ratio

1,69-2,04:1

Audio

1W Mono

Connections

D-sub 15 pin in

S-Video in

Cinch Video in

Mini jack in

USB Typ A & B




Ceiling Mounting

Yes

Power

244W / 4W standby

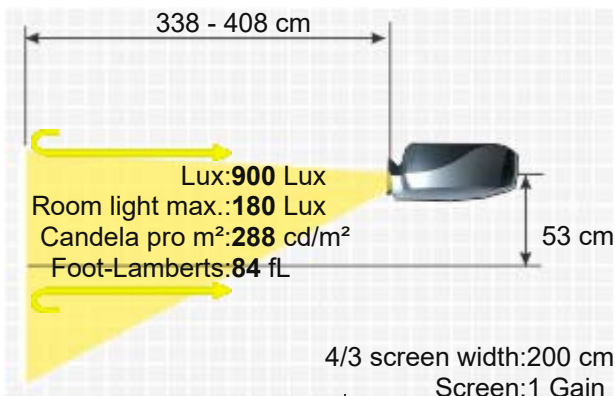

Size WxHxD 273 x 68 x 193 mm (10,7"x2,7"x7,6") 3,58 L/dm³
Operating Noise 40 / 35 dB in Eco Mode

Weight 1,70 kg / 3,75 lbs.
Keystone Vert.: +/-30° automatisch
Illumination 83%
H-sync: 15-92 kHz
Frequenz V-sync: 50-85 Hz
Range max.: 162 MHz
Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Password protection
- PJLink™
- Wi-Fi network compatible.
- Optional LAN network compatible.
- Digital Zoom
- View JPEG and MPEG2 in thumbnail view via USB key.
- Compatible with USB storage media.
- Wireless transmission of films in MPEG2 format.

Optional	Philips bulb only	NLMP15636
	Lamp ruby	Ruby-LMP15636
	Lamp original	ELPLP38 / V13H010L38
	Compatible lamp	LMP-K15636
	Remote control original	1291754 / 1566064
	Air filter original	ELPAF08 / V13H134A08
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15636>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonemp1715-en.html>