


Epson USA PowerLite Pro Cinema 4030



The high-end home cinema PowerLite Pro Cinema 4030 3D LCD projector from Epson USA has 2000 Ansi lumens, a contrast of 120000:1 and an HDTV 1920 x 1080 resolution. Manufacturer Epson USA specifies the lamp life as 4000 hours, which is equivalent to over 5.5 years at 2 hours per day. The integrated lens shift gives freedom when positioning the projector. The brightness of 2000 Ansi lumens enables an image width of 454 cm. In room light, the image should be max. 303 cm wide. The projector can also display 1080P and 3D without any problems. The model was built by Epson USA in 2013 and is no longer current.

Brief Introduction

Display Type

3 x 0,74 LCD TFT Panel mit MLA
HDTV 16/9 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2000

889 Lux (bei 200 cm Screen)

Contrast

120000:1 full on/off

120000:1 full on/off

Black Level

0,0167 min. Lumen

0,007 min. Lumen

Lens shift

Vert.: +/-96,3% Hori.: +/-47,1%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

High-End Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

230W UHE Lamp

Light Life

4000 h. 5000 h. in eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 2,1

Objective

F=2,3-3,6 f=22,5-47,2 mm

Throw Ratio

1,37-2,88:1

Audio

Nein

Connections

2 x HDMI in
D-sub 15 pin in
YUV in
Cinch Video in
RS232C Din 9 pin in
12V Trigger out
RJ45 in
USB Typ B



Ceiling Mounting

Yes, is possible.

Power


350W

Size WxHxD

466 x 140 x 395 mm (18,3"x5,5"x15,6") 25,77 L/dm³


Operating Noise

22 dB in Eco Mode

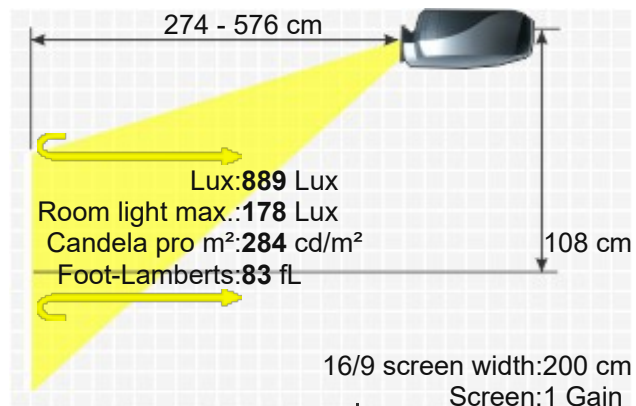

Key: 158 cm

Weight	8,40 kg / 18,52 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	-
Foot-Lamberts	83 fL / max. 454 cm screen width 284 cd/m²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Eco Mode
	■ Kensington Slot
	■ Gamma correction
	■ Remote control with backlight
Screen Mirroring	■ Lan network compatible.
	-

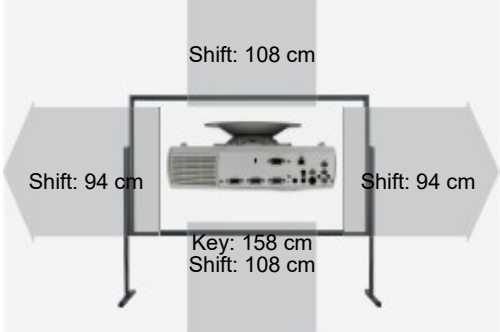

Optional accessories

	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status	2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Data	Created: 2013-09-30 13:29:28

More Details



HCinema
<https://www.projector-database.com/pro/epsonpowerliteprocinema4030-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.