

Hitachi CP AX2504

HITACHI CP AX2504



A brief introduction to the CP AX2504: The Hitachi short-throw LCD projector offers 2700 Ansi lumens, a contrast of 5000:1 and an XGA 1024 x 768 resolution. The lamp life is up to 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. Horizontal and vertical keystone correction makes setting up the picture childs play. This projector has a projection ratio of just 0.3:1. For a 2 m wide image, the projector only needs to be 60 cm away from the screen. The projector is equipped with a microphone jack plug and 16W speakers, so no additional speakers are required for presentations or training sessions. It is also Full HD 1080P compatible. The model was built by Hitachi in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector

2700 / 1800 im Eco Mode
5000:1 full on/off
0,5400 min. Lumen

Screen

900 Lux (bei 200 cm Screen)
5000:1 full on/off
0,18 min. Lumen

Contrast

Black Level

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

225W Lamp

Articel Nr.: DT01511

Light Life

5000 h. 10000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=4,21mm

Throw Ratio


0,3:1

Audio

1 x 16W

Connections

2 x HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in
Mikrofon in

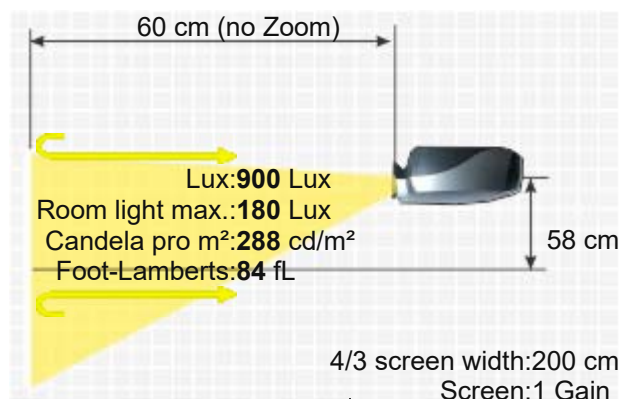

Ceiling Mounting Yes
Power 330W
Size WxHxD 377 x 136 x 360 mm (14,8"x5,4"x14,2") 18,46 L/dm³
Operating Noise 35 / 29 dB in Eco Mode

Weight 4,30 kg / 9,48 lbs.
Keystone Vert.: +/-5°
Hori.: +/-5°
Illumination -


Frequenz Range max.: 150 MHz

Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Dynamic iris
- Password protection
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- DICOM simulation

Optional Air filter original UX37191
Remote control original HL03033 / R020F/R020H
Lamp incl. air filter original DT01511 / DT01511M

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi23451>
2015 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2015-10-29 14:59:06

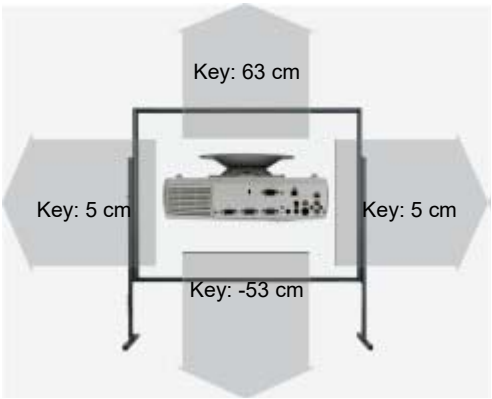

More Details



HCinema

<https://www.projector-database.com/pro/hitachicpax2504-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.