

Hitachi CP X1230



HITACHI CP X1230



Brief Introduction

Beta 2.5

A brief introduction to the CP X1230: The Hitachi LCD projector offers 4000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. An image width of up to 551 cm is possible, if the image width is smaller (we recommend max. 367 cm), rooms with residual light are also no problem. The model was built by Hitachi in 2005 and is no longer current.

Display Type

3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

4000

1333 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

10,0000 min. Lumen

3,358 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

310W UHB Lamp

Articel Nr.: CPX1250LAMP DT00601

CPX1250LAMP (Part#DT00601)

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,48

Objective

F=1,7-2,4 f=31-46 mm

Throw Ratio

1,5-2,2:1

Audio

2 x 1W

Connections

D-sub 15p in und out

5 x BNC RGBHV in

YUV in

Cinch Stereo in

Cinch Video in

S-Video in

Mini Jack in

RS232C



Ceiling Mounting


Yes

Power

470W

Size WxHxD

420 x 160 x 318 mm (16,5"x6,3"x12,5") 21,37 L/dm³

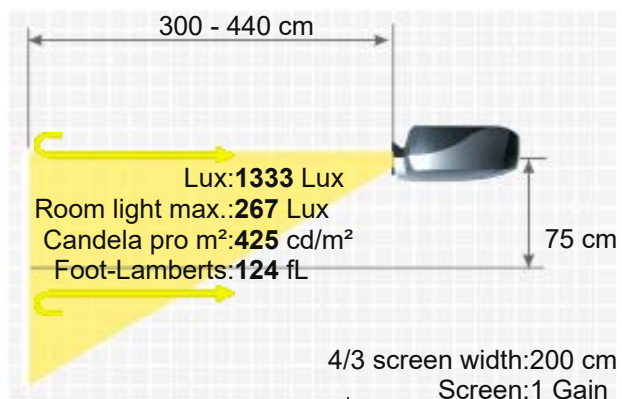

Operating Noise 41 / 37 dB in Eco Mode

Weight 6,89 kg / 15,19 lbs.
Keystone Vert.: +/-15°
Hori.: +/-5°

Illumination -

Frequenz H-sync: 15-91 kHz
V-sync: 50-120 Hz

Foot-Lamberts 124 fL / max. 551 cm screen width
425 cd/m²

- Features
- User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Picture-in-Picture

Please note Im Gegensatz zu seinen Brüdern CP X1200 CP X1250 hat er keine Wechselobjektive und kein Lens shift.

	Lamp ruby	Ruby-LMP1757
	Lamp incl. air filter original	DT00601
Optional	Compatible lamp	LMP-K15454
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d15454>

Optional Lenses


Status Data 2005 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/hitachicpx1230-en.html>

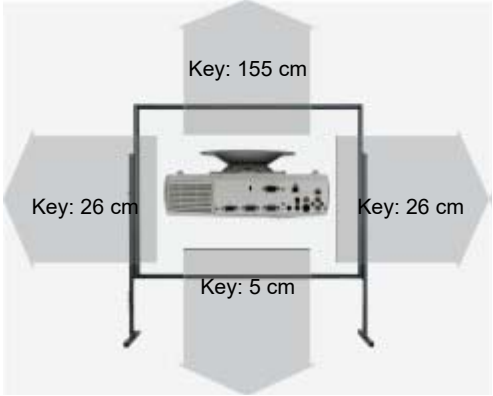

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.