

InFocus IN118HDa

INFOCUS IN118HDA



A brief introduction to the IN118HDa: The InFocus standard portable 3D BrilliantColor DLP projector offers 3000 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The lamp life is specified by the manufacturer as 5000 hours, which is over 6.8 years with a daily viewing time of 2 hours. The projector can illuminate a picture width of up to 556 cm well thanks to the 3000 Ansi lumens. In room light, however, the image width should ideally be less than 371 cm. Playing 1080P and 3D is also no problem for the projector. The model was built by InFocus in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 1 x 0,65" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

3000 / 2800 im Eco Mode 1333 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off 15000:1 full on/off

Black Level

0,2000 min. Lumen 0,089 min. Lumen

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

190 / 160W im Eco Mode Lamp

Articel Nr.: SP-LAMP-086

Light Life

5000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,24

Objective

-

Throw Ratio

1,5-1,8:1

Audio

2W Mono

Connections

HDMI 1.4 in


2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

RS232C

USB Typ B

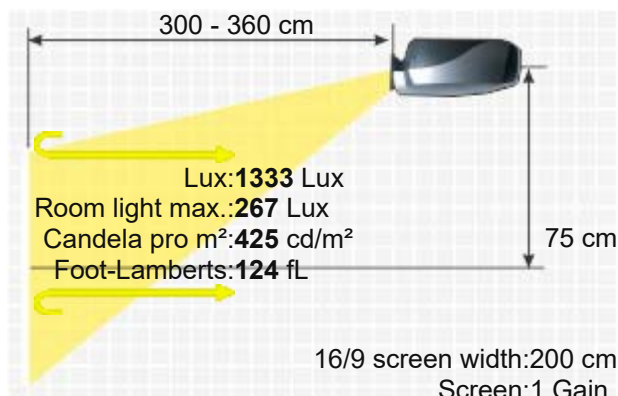

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Mini Jack Audio in und out
Yes
-
292 x 108 x 220 mm (11,5"x4,3"x8,7") 6,94 L/dm³
32 / 30 dB in Eco Mode

Weight
Keystone
Illumination

2,45 kg / 5,4 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15-91 kHz
V-sync: 24-120 Hz

Foot-Lamberts

124 fL / max. 556 cm screen width
425 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - Password protection
 - BrilliantColor™
 - 6 segment, 2x speed colour wheel
 - Internal memory: 2 GB

Optional

Lamp original
Remote control original

SP-LAMP-086
J8947-0319-00

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22309>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-10-23 14:34:06

Data

More Details



HCinema

<https://www.projector-database.com/pro/infocusinfocusin118hda-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.