

Kindermann KX 3200 active



A brief introduction to the KX 3200 active: The Kindermann LCD projector offers 2600 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 2600 Ansi lumens, an image width of 444 cm is possible. In room light, the image should be max. 296 cm wide. The projector also offers a whiteboard function that makes training and presentation rooms interactive. The model was built by Kindermann in 2008 and is no longer current, but is still one of the very popular projectors. It should also be noted that there are unfortunately no longer any replacement lamps for the projector, neither original nor replica.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	2600	867 Lux (bei 200 cm Screen)
	500:1 full on/off	500:1 full on/off
	5,2000 min. Lumen	1,744 min. Lumen

Resolution: XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes: PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application: Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source: 200W UHP Lamp
Articel Nr.: 8472

Light Life: 2000 h. 3000 h. in Eco Mode

Operating Costs: -

Focus: Manual

Zoom: Manual 1,2

Objective: F=1,65-1,93 f=18,5-22,2 mm

Throw Ratio: 1,47-1,78:1

Audio: 8W

Connections: DVI-I in
D-sub 15 pin in und out
YUV in
S-video in
Cinch Video in
USB Typ B
Mini jack Audio in
RS232C Din 9 pin in


Ceiling Mounting: Yes

Power: -

Size WxHxD: 325 x 97 x 260 mm (12,8"x3,8"x10,2") 8,2 L/dm³

Operating Noise: 32 / 29 dB in Eco Mode

Weight: 3,30 kg / 7,28 lbs.
Keystone: Vert.: +/-30°
Illumination: -

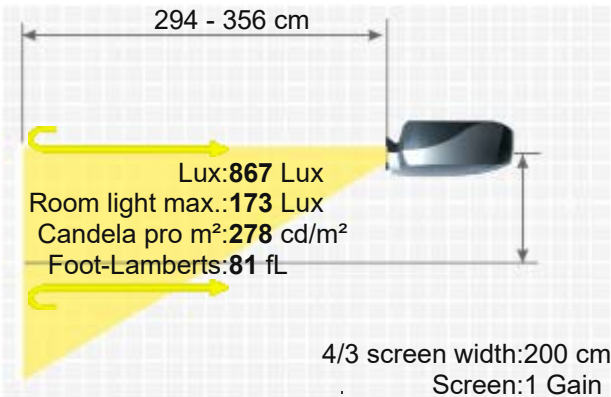

Frequenz

H-sync: 31-92 kHz
V-sync: 48-120 Hz

Foot-Lamberts

81 fL / max. 444 cm screen width

278 cd/m²

- Eco Mode
- Kensington Slot
- Remote control with mouse control
- Interactive presentations without a special board
- Whiteboard functionality with integrated camera that communicates with the two infrared pointer rods
- Control software on CD-ROM and USB stick (for immediate use without installation)
- Quick Power On / Off (within 10 sec.)

Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/kindermannkx3200aktive-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.