

ACTO AT S2200



ACTO AT S2200



Brief Introduction

Beta 2.5

Display Type



1 x DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2200

712 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1000 min. Lumen

0.357 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed

Application

PAL, SECAM, NTSC,
Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

230W Lamp

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

-

Ceiling Mounting

-

Power

300W

Size WxHxD

-

Operating Noise

35 dB in Eco Mode

Weight

-

Keystone

-

Illumination

-

Frequenz

H-sync: 15-150 kHz

V-sync: 50-150 Hz

Foot-Lamberts

66 fL / max. 408 cm screen width

226 cd/m²

Features


■ Eco Mode

■ Remote control with laser pointer

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

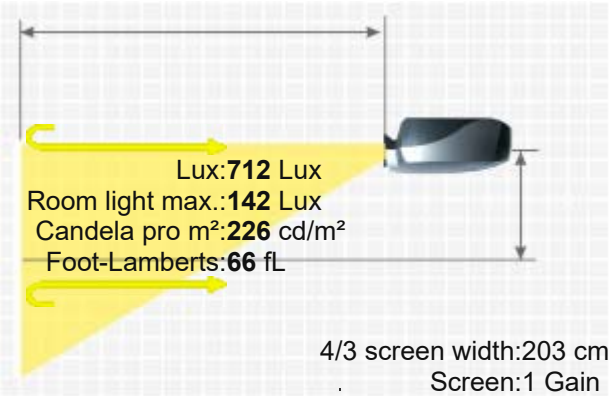



HCinema

<https://www.projector-database.com/pro/actopts2200-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.