

ACTO DX430



ACTO DX430



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The ACTO DX430 DLP projector has 3500 Ansi lumens, a contrast of 2600:1 and an SVGA 800 x 600 resolution. Thanks to the brightness of 3500 Ansi lumens, a picture width of 515 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 343 cm). It was launched in 2009 and is no longer offered by the manufacturer ACTO.



1 x 0,55" DLP Chip

SVGA 4/3 Ti Digital Light Processing Chip

Projector

3500

2600:1 full on/off

1,3462 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)

2600:1 full on/off

0,449 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

280W Lamp

-

-

Manual

Manual 1,16

-

1,46-1,70:1

2 x 2W

2 x D-sub 15 pin in 1 x out

S-Video in

Cinch Video in

RS232C

USB

Yes

280W

270 x 80 x 230 mm (10,6"x3,1"x9,1") 4,97 L/dm³

35dB

2,80 kg / 6,17 lbs.

Vert.: +/-15°



95%

H-sync: 15-110 kHz

V-sync: 50-80 Hz

108 fL / max. 515 cm screen width

370 cd/m²

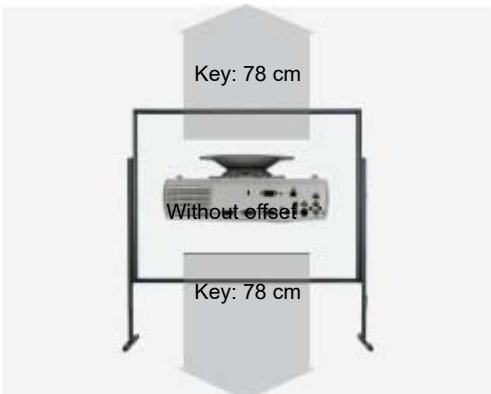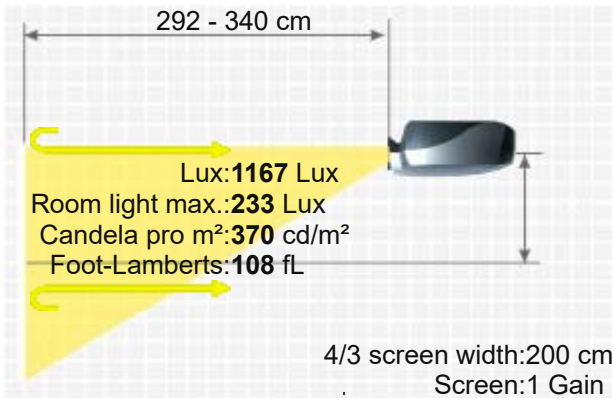

More Details



HCinema

<https://www.projector-database.com/pro/actodx430-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.