

ACTO LX128



ACTO LX128



Brief Introduction

Beta 2.5

Display Type 3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen 2600 867 Lux (bei 200 cm Screen)

Contrast 2000:1 full on/off 2000:1 full on/off

Black Level 1,3000 min. Lumen 0,434 min. Lumen

Offset -

Resolution XGA 1024 x 768
786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source Medium screen width or rooms with little light, max. 100 lumens.

Light Life 230W USHIO Lamp

3000 h. 4000 h. in Eco Mode

Operating Costs -

Focus Manual

Zoom Manual 1,2

Objective F=2,3-2,5 f=18,82-22,60 mm

Throw Ratio 1,47-1,77:1

Audio 2 x 3W

Connections D-sub 15 pin in und out
S-Video in
Cinch Video in
RS232C
Mini Jack Audio in und out

Ceiling Mounting Yes

Power 280W

Size WxHxD 327 x 87 x 251 mm (12,9"x3,4"x9,9") 7,14 L/dm³

Operating Noise 34 / 29 dB in Eco Mode

Weight 2,90 kg / 6,39 lbs.



Keystone Vert.: +/-30°

Illumination 85%

Frequenz H-sync: 15-100 kHz
V-sync: 48-100 Hz

Foot-Lamberts 81 fL / max. 444 cm screen width
278 cd/m²

Features ■ Full HD 1080P compatible
■ Eco Mode

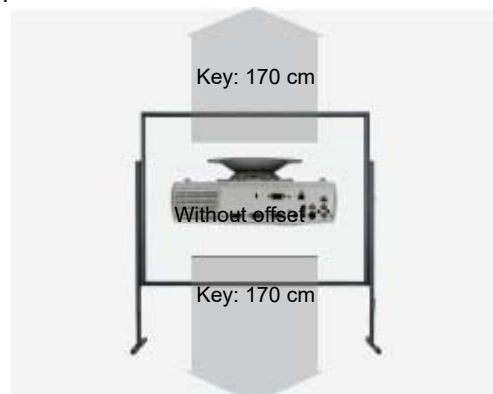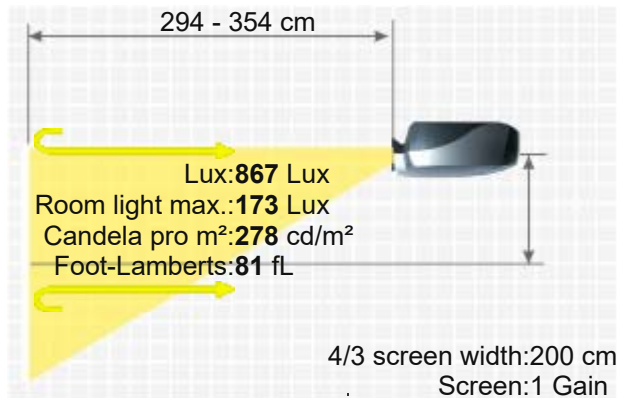

More Details



HCinema

<https://www.projector-database.com/pro/actolx218-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.