

Marantz VP 10S1

MARANTZ VP 10S1



The Marantz VP 10S1 DLP home cinema projector has 1200 Ansi lumens, a contrast of 3000:1 and an HDTV 1280 x 720 resolution. The projector also offers a lens shift function that makes image adjustment childs play. An image width of up to 352 cm is possible as the projector has 1200 Ansi lumens. However, if room light is available, the picture should be max. 235 cm wide. The model was built by Marantz in 2004 and is no longer current. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither original nor replica.

 3 x 0,81" HD2 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector	1200	518 Lux (bei 203 cm Screen)
Contrast	3000:1 full on/off	3000:1 full on/off
Black Level	0,4000 min. Lumen	0.173 min. Lumen

Lens shift Vert.: +70% -25% Hori.: +/-10% motorisch

Resolution HDTV 1280 x 720

921.600 Pixel

Video Modes PAL, SECAM, NTSC 3.58/4.43

Disc Recognition DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

Application Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source 250W P-VIP Lamp

Articel Nr.: Ruby-LMP9000308

Light Life 1500 h.

Operating Costs -

Focus Powered


Zoom Powered 1,34

Objective optional

Throw Ratio optional

Audio No

Connections DVi-D in
D-sub 15pin in
YUV über Cinch in
YUV über BNC in
S-Video in
Cinch Video in
2 x 12V Trigger out
Remote in und out

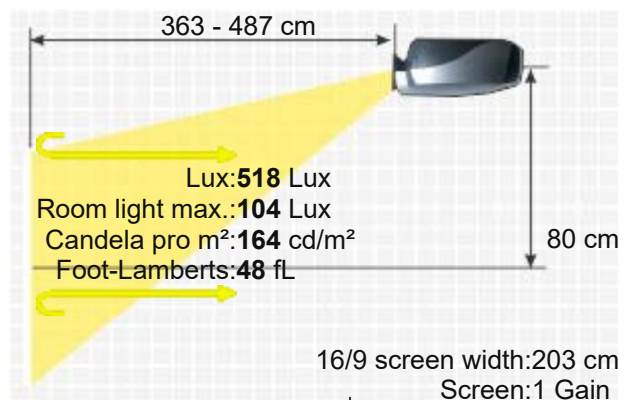



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
380W
510 x 330 x 670 mm (20,1"x13"x26,4") 112,76 L/dm³
42dB

Weight
Keystone
Illumination

41,00 kg / 90,39 lbs.
Vertical und horizontal
-

Frequenz

-

Foot-Lamberts


48 fL / max. 352 cm screen width
164 cd/m²

Features

- Lens shift Funktion motorisch
- Eco Mode
- Gamma correction
- Crestron®-Software compatible.
- DCDi De-interlacer

In Test

-

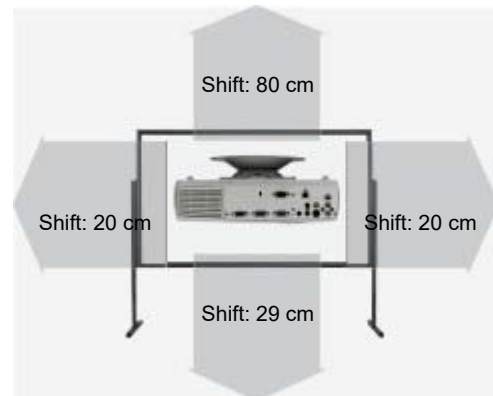

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Marantz LN10VP53	2.4-3.6:1	4.9-7.3 m	70-25%	+/-10%	Powered
Marantz LN10VP40	1.8-2.4:1	3.7-4.9 m	70-25%	+/-10%	Powered
Marantz LN10VP32	1.44-1.8:1	2.9-3.7 m	70-25%	+/-10%	Powered
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data



More Details



HCinema

<https://www.projector-database.com/pro/marantzvp10s1-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.