

Maxell MC-EX4551

MAXELL MC-EX4551



The Maxell model MC-EX4551 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 20000:1. The manufacturer Maxell specifies a lamp life of 12500 hours, which is over 17.1 years with a daily viewing time of 2 hours. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. Thanks to the brightness of 4500 Ansi lumens, an image width of 584 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 389 cm). Even 1080P video signals are no problem for the projector. The model was built by Maxell in 2018 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 4500

Screen 1500 Lux (bei 200 cm Screen)

Contrast

Projector 20000:1

Screen 20000:1

Black Level

Projector 0,2250 min. Lumen

Screen 0,075 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Life

230W Lamp

Articel Nr.: DT02081

Operating Costs

6000 h. / 12500 h. in Eco Mode

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=19-23 mm

Throw Ratio


1,5-1,8:1

Audio

16W

Connections

2 x HDMI in
2 x D-sub 15 pin in 1 x out
Cinch Audio in
Cinch Video in
Mini Jack Audio 2x in und out(seitlich)
USB Typ A,B
RJ45 in
RS232C Din 9 pin in

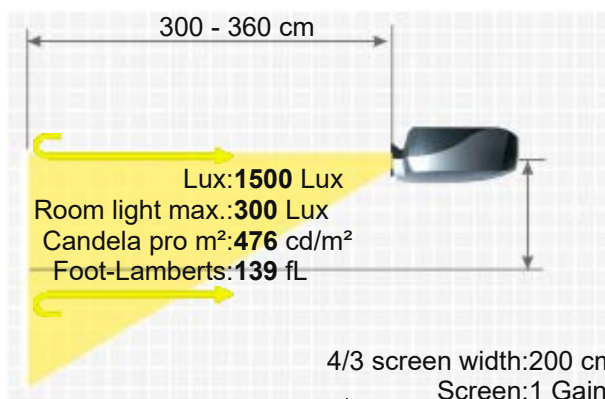



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
320W
348 x 88,9 x 264,2 mm (13,7"x3,5"x10,4") 8,08 L/dm³
-

Weight
Keystone
Illumination

3,58 kg / 7,89 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz
Foot-Lamberts

H-sync: 15-106 kHz
V-sync: 56-120 Hz
139 fL / max. 584 cm screen width
476 cd/m²

Features


- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Optional Wi-Fi network compatible.
- Lan network compatible.

Optional

Air filter original UX39561
Remote control original HL03037 / R025H

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi24628>
2018 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2019-04-08 20:16:18

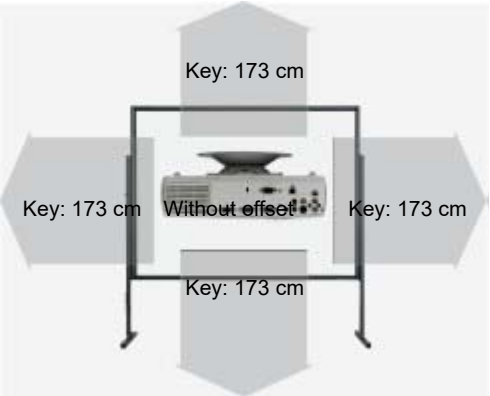

More Details



HCinema

<https://www.projector-database.com/pro/maxellmcex4551-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.