Mitsubishi HC6800/U

Brief Introduction Beta 2.5	The Mitsubishi HC6800/U high-end home cinema LCD projector has 1300 Ansi lumens, a contrast of 30000:1 and an HDTV 1920 x 1080 resolution. Including a lens shift function, which provides freedom during installation. A picture width of up to 366 cm is possible. However, the image should be smaller in room light. We recommend max. 244 cm. The model is also Full HD 1080P compatible. The model was built by Mitsubishi in 2009 and is no longer current.
Display Type	3 x 0,74" D7 LCD TFT Panel mit MLA HDTV 16/9 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 1300 / 1500 Max — Screen: 578 Lux (bei 200 cm Screen)
Contrast	Projector: 30000:1 — Screen: 30000:1
Black Level	Projector: 0,0433 min. Lumen — Screen: 0,019 min. Lumen
Lens shift	Vert.: +/-75% Hori.: +/-5%
Resolution	HDTV 1920 x 1080 2.073.600 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	170W Lamp Article Nr.: VLT-HC6800LP
Light Life	2000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Powered
Zoom	Powered 1,6
Objective	F=2,5-3,1 f=23,5-37,6 mm
Throw Ratio	1,42-2,26:1
Audio	Nein
Connections	HDMI in D-sub 15 pin in YUV in S-video in Cinch Video in RS232C Din 9 pin in

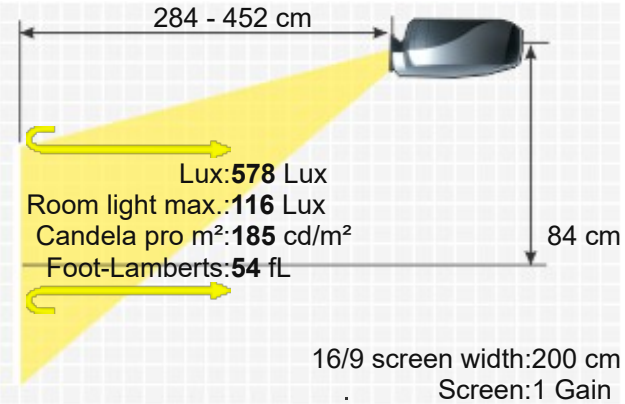

MITSUBISHI HC6800/U

	12V Trigger out
Ceiling Mounting	Yes, is possible.
Power	250W / 7W standby
Size WxHxD	427 x 159 x 440 mm (16,8"x6,3"x17,3") 29,87 L/dm³
Operating Noise	20 dB in Eco Mode

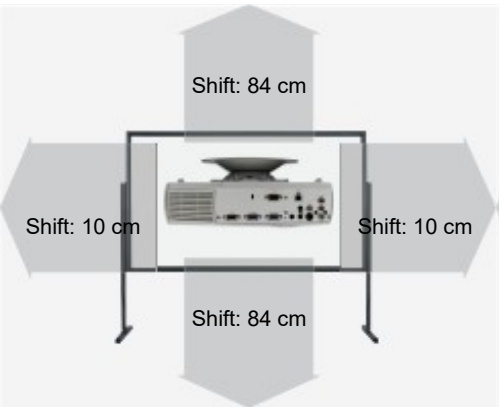

Weight	7,50 kg / 16,53 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	54 fL / max. 366 cm screen width 185 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Dynamic iris ■ Password protection ■ Remote control with backlight ■ Overscan adjustable
Screen Mirroring	-
In Test	-

Optional accessories

	Lampe Ruby	Ruby-LMP19463	90,74 €
	Lampe Original	VLT-HC6800LP / 915D116O13	EOL €
	Kompatible Lampe	LMP-K19463	57,86 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Deckenhalterung 100-120	Halterung100	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status 2009 Discontinued (EOL) // Last update of the data: 2025-03-03

Data

More Details

HCinema

https://www.projector-database.com/pro/mitsubishihc6800-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.