


Appotronics AL-MK750A

APPOTRONICS AL-MK750A



The AL-MK750A 3D Laser DLP has 7500 ANSI lumens, a contrast ratio of 100000:1, and a UHD (4K2K) resolution of 3840 x 2160. Manufacturer Appotronics specifies a service life of 20,000 hours, which equates to over 13.7 years at 4 hours per day. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. The projector can illuminate an image width of 800 cm well. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 533 cm here.

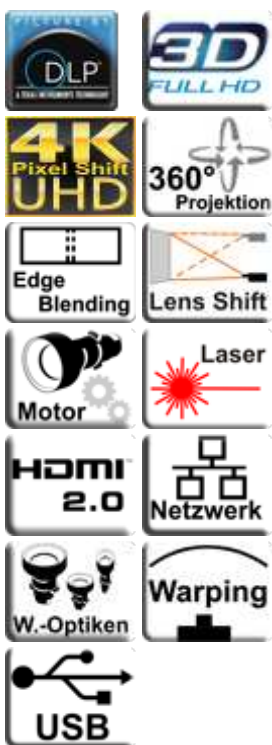

1 x 0,47" DMD DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Disc Recognition

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

7500

100000:1 full on/off

0,0750 min. Lumen

Vert.: +/-100% Hori.: +/-40%

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (60p)

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

High-End Homecinema | Very large screen width and rooms with plenty of light and shaded daylight.

ALPD Laser phosphor

20000 h.

0,00 € Laser

Powered

Powered 1,6

optional

optional

Nein

2x HDMI 2.0 in

S/PDIF

3D Sync x29 in und out

3D IR Out

D-sub 15pin in und out

Mini Jack Audio in und out


USB in

RJ45 in

3333 Lux (200 cm Screen width)

100000:1 full on/off

0,033 min. Lumen

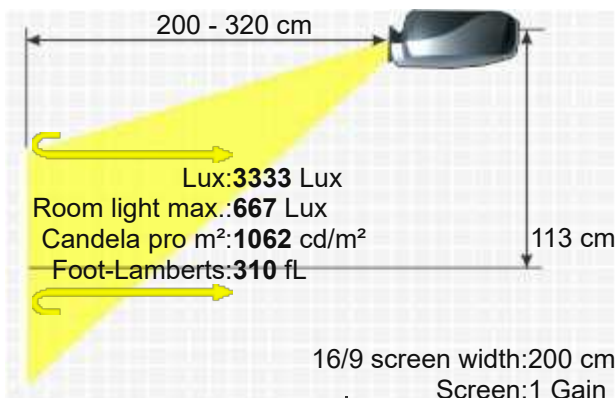


Ceiling Mounting Yes, is possible.
Power 600W
Size WxHxD 460 x 138 x 388 mm (18,1"x5,4"x15,3") 24,63 L/dm³
Operating Noise 36dB

Weight 12,50 kg / 26,46 lbs.
Keystone Vert.: +/-35°
Hori.: +/-35°
Illumination 90%

Frequenz -
Foot-Lamberts 310 fL / max. 800 cm screen width
1062 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Warping
- 360° installable
- Edge Blending
- Control via web browser
- Lan network compatible.
- APOS OS
- MEMC
- AIPQ Image Enhancement

Screen Mirroring -

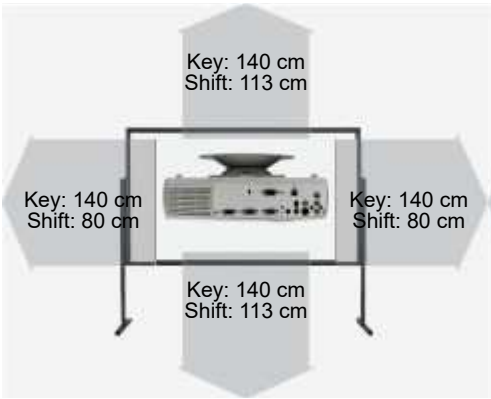

Optional accessories

	Deckenhalterung Länge 225 mm	Halterung45	83,60 €
---	------------------------------	-------------	---------

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
AL-ML153MA	1.54-2.48:1	308-496 m			Powered
AL-ML100MA	1-1.6:1	200-320 m	60-100%	+/-40%	Powered
AL-ML070FR	0.7-0.9:1	140-180 m	60-100%	+/-40%	Powered
AL-ML050FR	0.5:1	100 m	60-100%	+/-40%	No Zoom

Status 2025 Current model // Last update of the data: 2026-01-26

Data



More Details



HCinema

<https://www.projector-database.com/pro/appotronicsalmk750a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.