

Mitsubishi XL9U/ Orange

MITSUBISHI XL9U/ ORANGE



Brief Introduction

Beta 2.5

With the XL9U/ Orange, manufacturer Mitsubishi offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 350:1. The projector can illuminate an image width of up to 389 cm thanks to its 2000 Ansi lumens. In room lighting, however, the image width should ideally be less than 259 cm. The model was built by Mitsubishi in 2006 and is no longer current.

Display Type



3 x 0,6" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2000 / 1500 im Eco Mode

667 Lux (bei 200 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

5,7143 min. Lumen

1,922 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200 / 160W im Eco Mode Lamp

Light Life

Articel Nr.: VLT-SL6LP

2000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,6-1,9 f=19-22 mm

Throw Ratio

1,484-1,784:1

Audio

2W Mono

Connections

2 x D-sub 15 pin in 1 x out

S-Video in


Cinch Video in

Mini Jack in und out

USB in

5V Trigger out

RS232C Din 8 pin

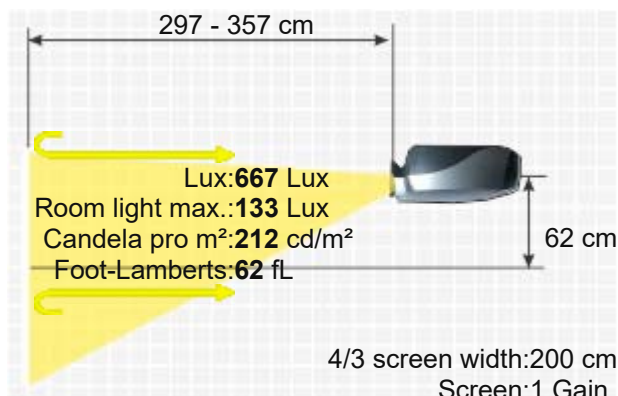



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
280W
275 x 70 x 261 mm (10,8"x2,8"x10,3") 5,02 L/dm³
-

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

2,70 kg / 5,95 lbs.
Vertical
-
H-sync: 15-100 kHz
V-sync: 50-120 Hz
Range max.: 140 MHz
62 fL / max. 389 cm screen width
212 cd/m²

Features

- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- Remote control with mouse control
- digital zoom
- de-interlacer

Optional

- | | |
|---------------------------|------------------------|
| Bulb only | NLMP5032 |
| Lamp ruby | Ruby-LMP5032 |
| Lamp original | VLT-SL6LP / 915D116004 |
| Compatible lamp | LMP-K15481 |
| Universal Remote original | Fernb-uni-V3 |
| Ceiling Mount 100-120 | Halterung100 |

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n15481>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/mitsubishixl9u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.