


Appotronics GU25KA

APPOTRONICS GU25KA

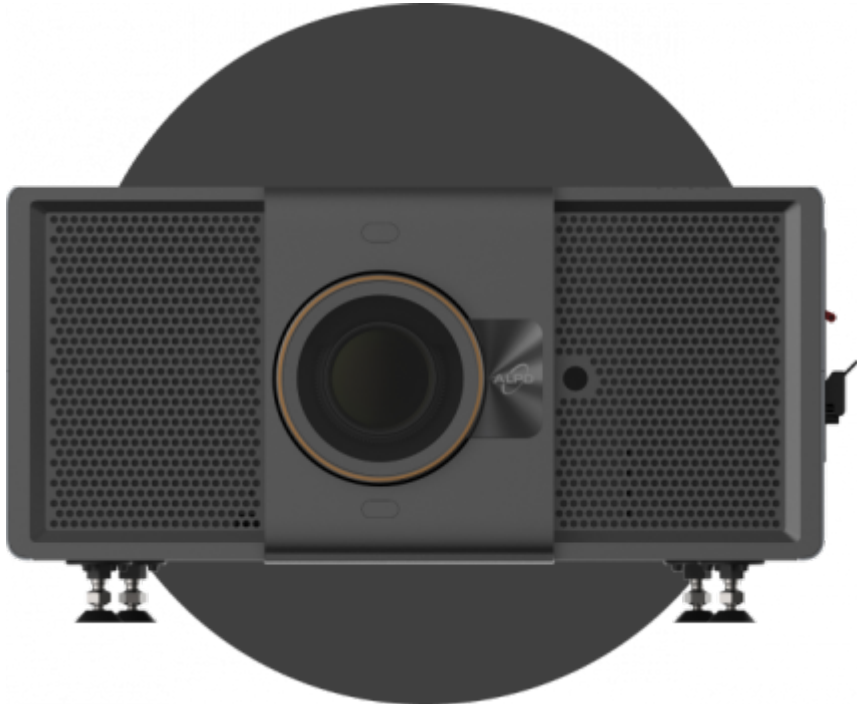

Brief Introduction

Beta 2.5

Brief introduction to the Appotronics GU25KA. The large-event DLP laser projector has a WUXGA 1920 x 1200 resolution and a contrast ratio of 100000:1. The manufacturer Appotronics specifies the service life as 20,000 hours, which equates to over 13.7 years at 4 hours per day. The projector also offers a lens shift function for flexible projection adjustment without any loss of quality. The projector can illuminate images up to 1606 cm wide thanks to its 25000 ANSI lumens. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 1071 cm. If the image is still too small, the integrated edge blending software can help to project a large image using additional projectors. The projector can also play 1080P without any problems.



3 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

25000 / 26000 Center Lumen

11111 Lux (200 cm Screen width)

Contrast

100000:1 full on/off

100000:1 full on/off

Black Level

0,2500 min. Lumen

0,111 min. Lumen

Lens shift

Vert.: +/-90% Hori.: +/-40%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Red and Blue Laser + ALPD® Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio


optional

Audio

-

Connections

HDMI in
DisplayPort
DVI-D in
D-sub 15pin in und out
Mini Jack Audio in und out
USB in
Wired Remote in
RS232C Din 9 pin in
RJ45 in
HDBaseT

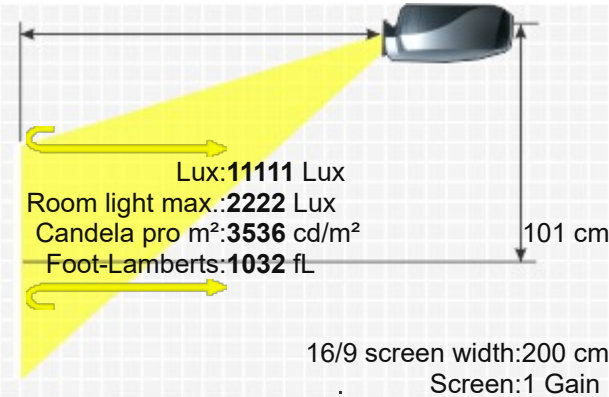

Ceiling Mounting -
Power 2500W
Size WxHxD 818 x 280 x 608 mm (32,2"x11"x23,9") 139,26 L/dm³
Operating Noise 49dB


Weight 68,00 kg / 149,91 lbs.
Keystone Vert.: +/-20°
Hori.: +/-20°
Illumination 95%

Frequenz -

Foot-Lamberts 1032 fL / max. 1606 cm screen width
3536 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Kensington Slot
- Warping
- Edge Blending
- Password protection
- Lan network compatible.
- Refresh rate: 120Hz @ WUXGA, 60Hz @ 4K

Screen Mirroring -

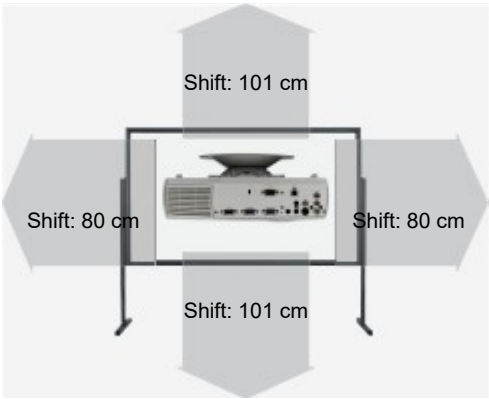

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
4.5 - 8.2	4.5-8.2:1	9-16.4 m			Powered
3.66 - 5.94	3.66-5.94:1	7.3-11.9 m			Powered
2.13 - 4.16	2.13-4.16:1	4.3-8.3 m			Powered
1.6 - 2.29	1.6-2.29:1	3.2-4.6 m			Powered
1.28 - 1.81	1.28-1.81:1	2.6-3.6 m			Powered
0.89 - 1.29	0.89-1.29:1	1.8-2.6 m			Powered
Fix Optional Lenses					
0.8:1	0.8:1	1.6 m			No Zoom
0.7	0.7:1	1.4 m			No Zoom

Status 2025 Current model // Last update of the data: 2025-09-09
Created: 2025-07-31 09:58:15



More Details



HCinema

<https://www.projector-database.com/pro/appotronicsgu25ka-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.