

Asee ASP 2150



A S E E A S P 2 1 5 0



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Please note

With the ASP 2150, manufacturer Asee offers an LCD projector with SVGA 800 x 600 resolution and a contrast of 200:1. An image width of up to 246 cm is possible. However, the image should be smaller in room light. We recommend max. 164 cm. This model is no longer offered by Asee.



1 x 6,4" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

800

200:1 full on/off

4,0000 min. Lumen

Screen

267 Lux (bei 200 cm Screen)

200:1 full on/off

1,355 min. Lumen

SVGA 800 x 600

480.000 Pixel

PAL, NTSC,

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

350W Lamp

-

-

-

-

-

-

-

D-sub 15pin in und out

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack

USB

RS232C

-

400W

420 x 330 x 230 mm (16,5"x13"x9,1") 31,88 L/dm³

-

6,50 kg / 14,33 lbs.

Vert.: +/-15°

80%

H-sync: 13-80 kHz


V-sync: 50-85 Hz

25 fL / max. 246 cm screen width

86 cd/m²

-

-

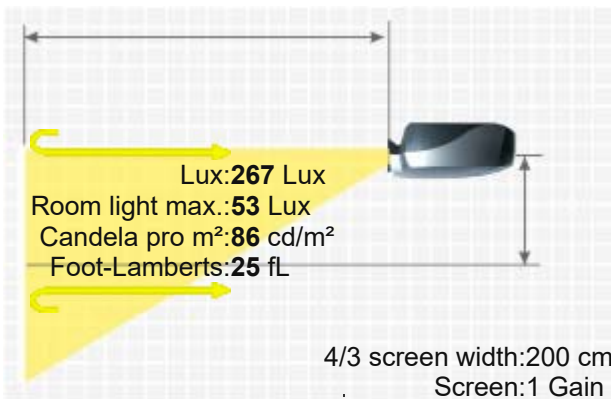

More Details



HCinema

<https://www.projector-database.com/pro/aseeasp2150-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.